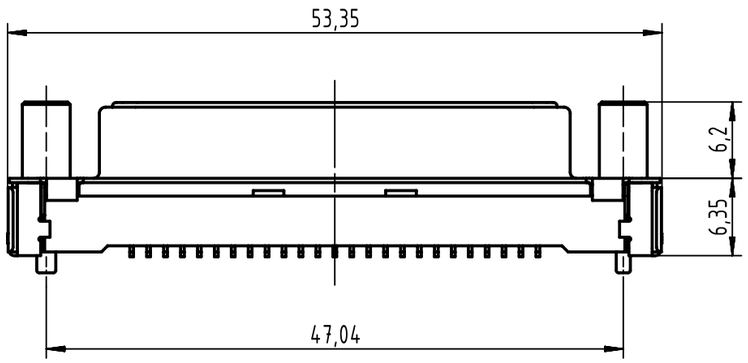

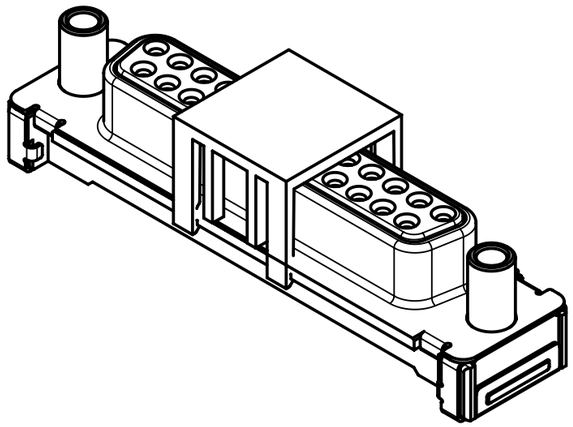

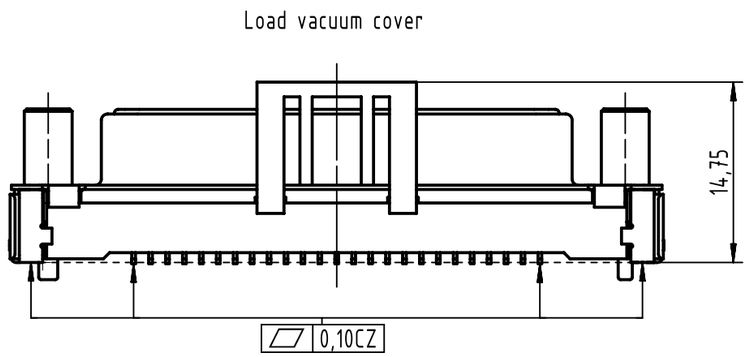

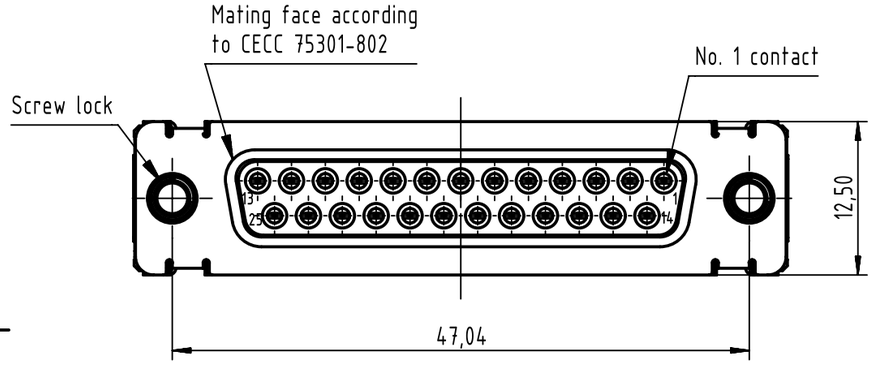



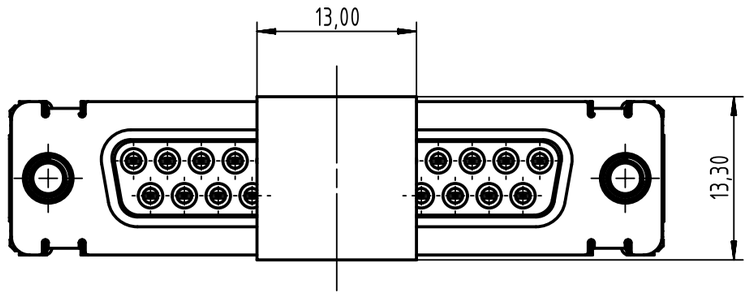

PCB layout, component side

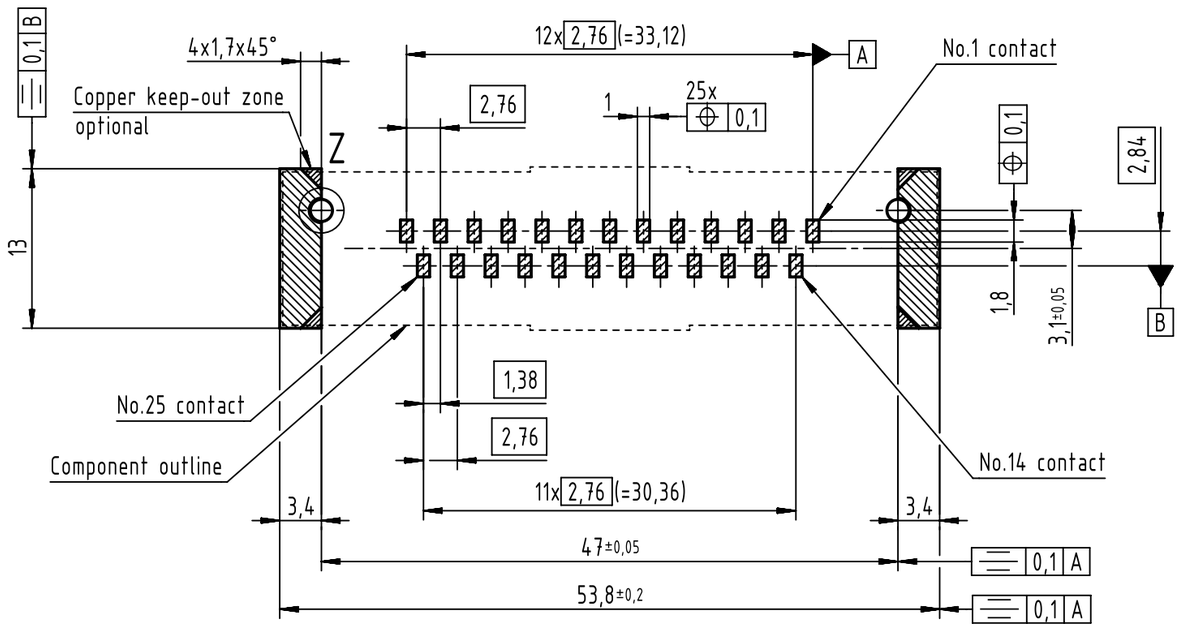

Z (5:1)



Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200302.

Part number	PL	Screw lock	Index designation
0955 315 6622 333	2	4-40 UNC	Samples
0955 315 3622 741	1	4-40 UNC	Reel packaging (140 connectors)
0955 315 6622 741	2	4-40 UNC	Reel packaging (140 connectors)
0955 315 7622 741	3	4-40 UNC	Reel packaging (140 connectors)
0955 315 3621 741	1	M3	Reel packaging (140 connectors)
0955 315 6621 741	2	M3	Reel packaging (140 connectors)
0955 315 7621 741	3	M3	Reel packaging (140 connectors)

Black insulator

All Dimensions in mm
Original Size DIN A3

Scale 2:1

Free size tol.

Ref.

Sub.

All rights reserved

Department EL PD

Created by ZHUANGJ

Inspected by LUOK

Standardisation HOFFMANN

Date 2018-11-29

State Final Release

HARTING Electronics GmbH
D-32339 Espelkamp

Title D-Sub str SMT 25-pole fem ass with screw lock & pad

Doc-Key / ECM-Nr. 100236632/UGD/001/C 500000139800

Type TB

Number 0955315X62X

Rev. C

Page 1/1

A3