

System connectors - FLKM S135-460-4UA/U/S400 - 2314862

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S135/S400 adapter connects a SIMATIC® S5 plug directly to the SIMATIC® S7 400 base board.
Conversion: 6ES5 460-4UA13 (voltage measurement) to 6ES7 431 1KF00-0AB0



Key commercial data

Packing unit	1 pc
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	24 V DC
Max. permissible current	4 A (per path)
	4 A (per connection, supply via separate power supply)
Connection type, connector	SIEMENS S5-135 U pin strip
Mounting position	Vertical
Standards/regulations	DIN EN 50178
	IEC 62103

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Supported controller

Controller	SIEMENS S5-135 U
- suitable I/O card	6ES5 460-4UA13

System connectors - FLKM S135-460-4UA/U/S400 - 2314862

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27249205
eCl@ss 7.0	27249205
eCl@ss 8.0	27249205

ETIM


ETIM 2.0	EC000237
ETIM 3.0	EC000237
ETIM 4.0	EC000237
ETIM 5.0	EC002584

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Circuit diagram

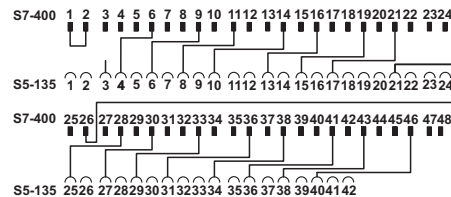

Connection scheme: FLKM S135-460-4UA/U/S400