


WIRE LIST:

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	SHIELD	SHELL

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
U025-06N-PM	06INCH	152.4	+15/-0
U025-001-PM	01	305	+15/-0
U025-006-PM	06	1830	+75/-0

- NOTE:
- CABLE:UL2725 USB 2.0 CABLE 28AWG*1P+20AWG*2C+AEB(AL) OD: Ø4.8mm BLACK PVC JACKET.
 - CONN:
P1: USB B TYPE MALE, WHITE PBT INSULATIPON,GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
P2: USB B TYPE FEMALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
 - HOOD: P1:MOLDED 45P BLACK PVC,P2:MOLDED 25P BLACK PVC.
 - MOLD NO.: USB-BM01,USB-BF04,USB-BF04N.
 - CABLE ASS'Y MUST PASS CONTINUITY TEST.

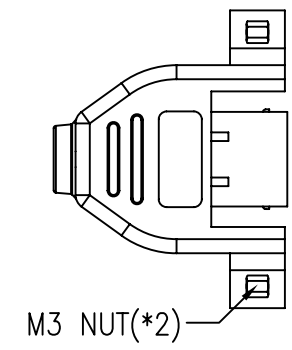

A	INITIAL RELEASE		01/17/13		
REV	DESCRIPTION OF CHANGE		DATE		
TOLERANCE		TRIPP-LITE			
INCHES					
.X	.015				.30
.XX	.010				.10
.XXX	.005	.05	SCALE	NONE	
DRAWN BY		Eric	UNIT	MM	
CHECK BY			SHEET	1/1	
APPD BY			DATE	01/17/13	
TITLE			REV	A	
PART NO.			U025-XXX-PM		