

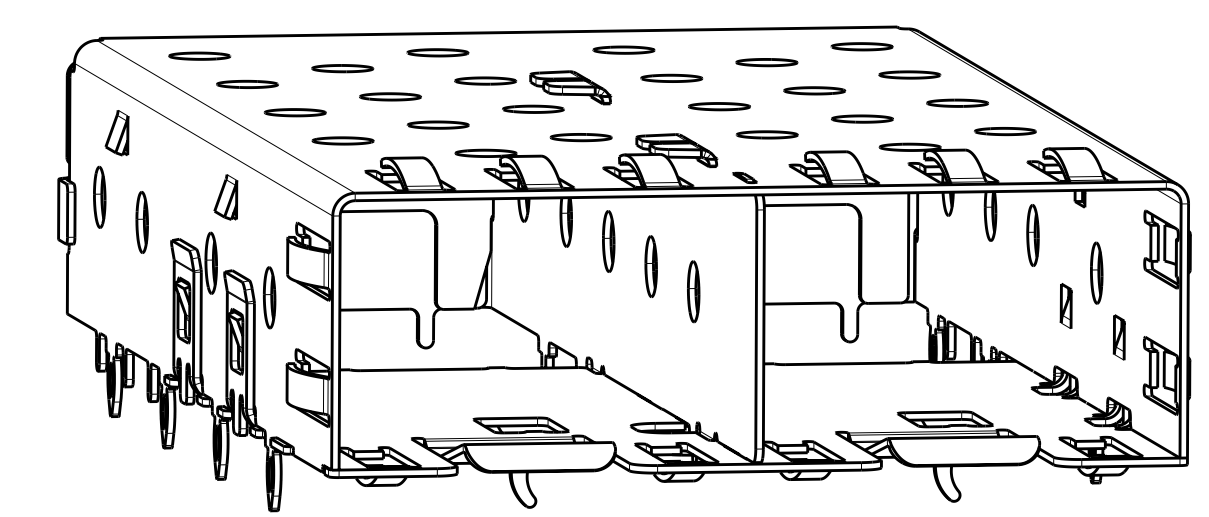
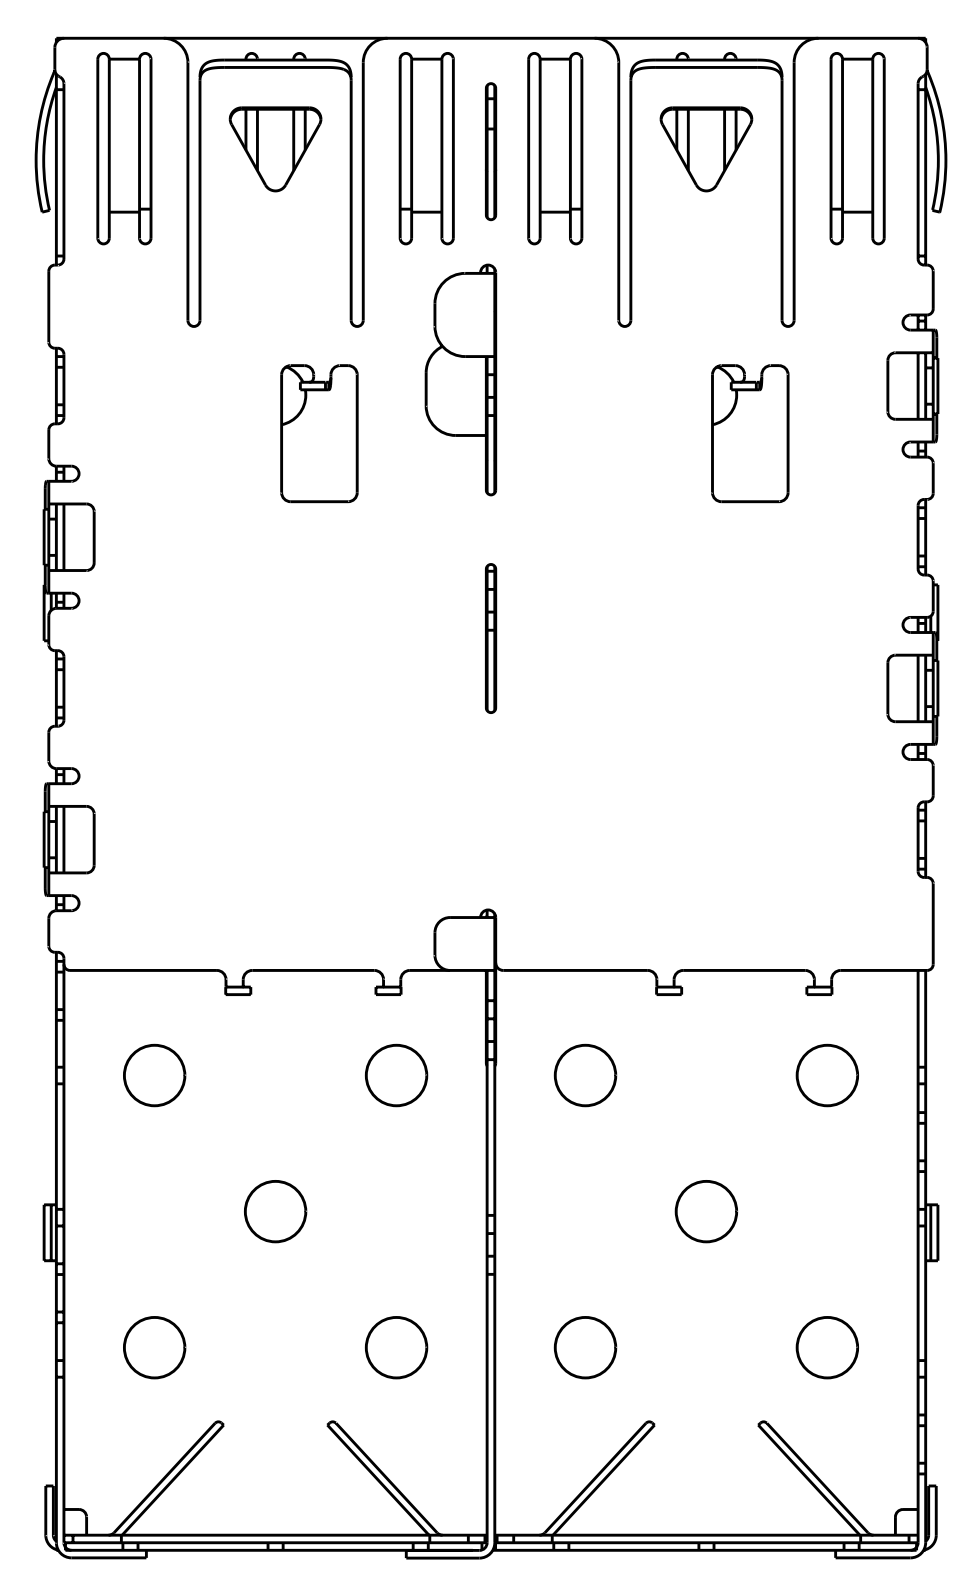
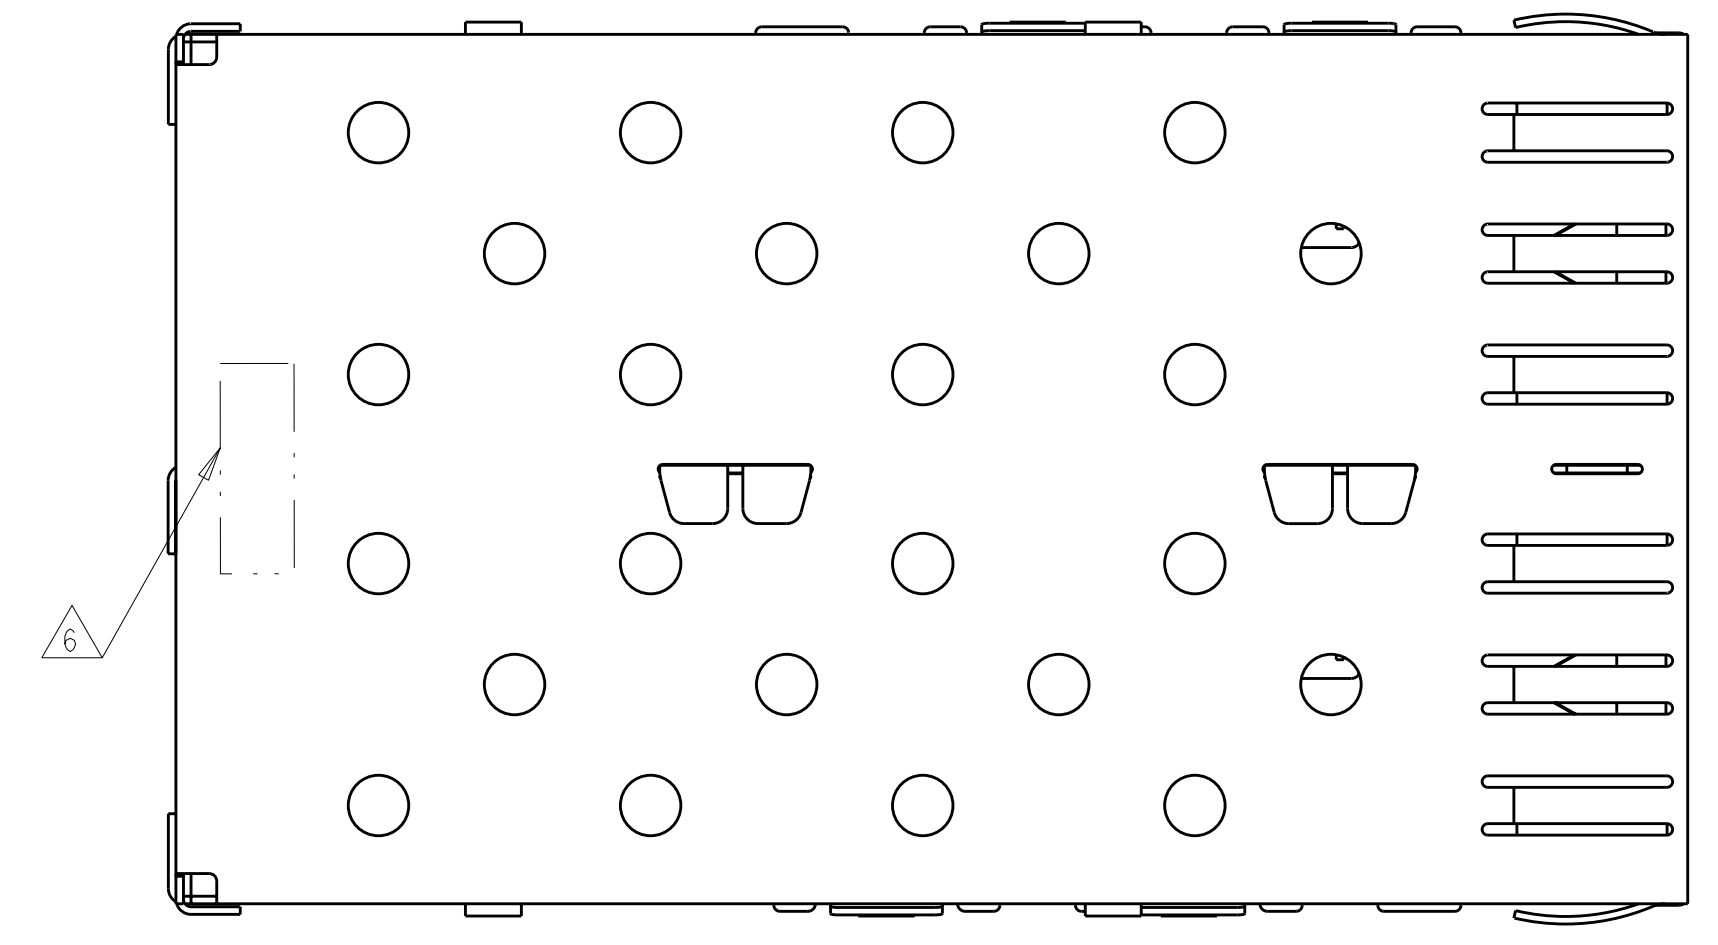
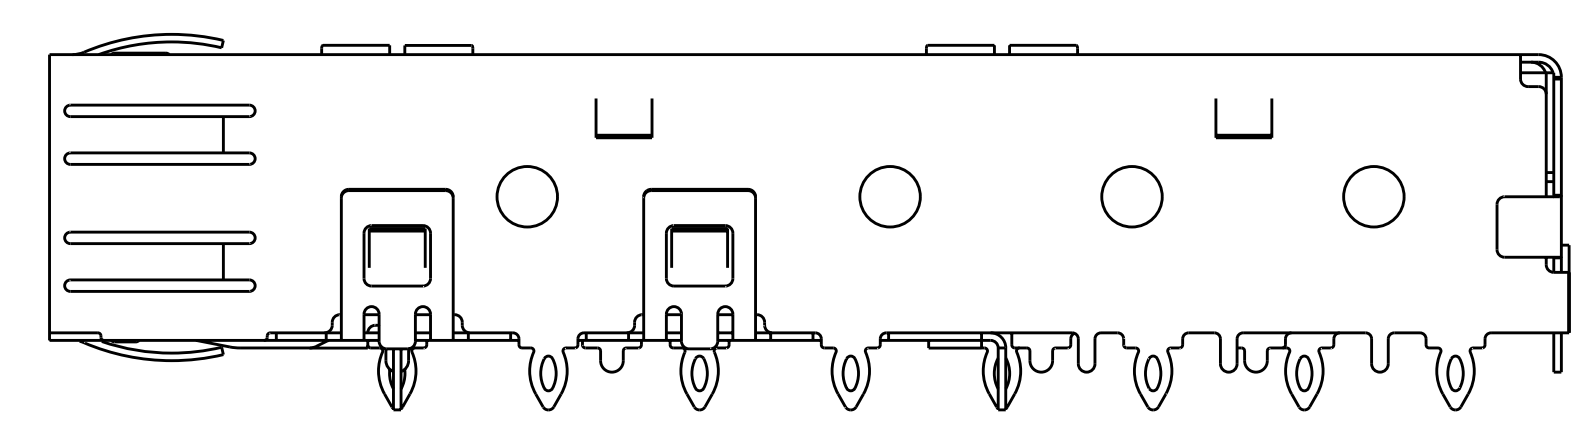
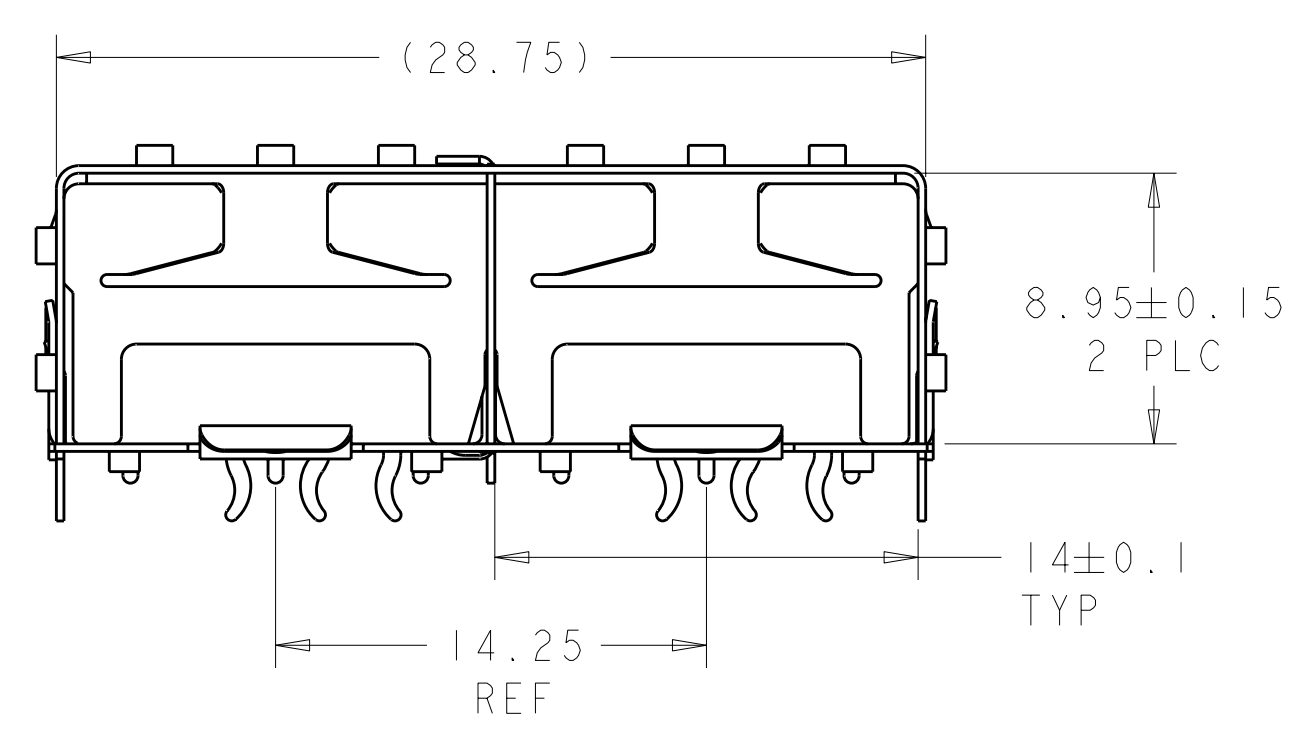


LOC	DIST	REVISIONS			
GP	00	REV	DATE	DWN	APVD
		D1	REVISED PER ECO-11-005027	10MAY2011	RK HMR

- 1 MATERIAL: COPPER ALLOY.
- 2 FINISH: TIN PLATING PER ASTM B 545, 1.25µm MINIMUM THICKNESS ALL OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
- 3 PADS AND VIAS CHASSIS GROUND.
- 4 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5 REFERENCE APPLICATION SPEC 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESSES.
- 6 COMPANY LOGO IN APPROXIMATE AREA SHOWN

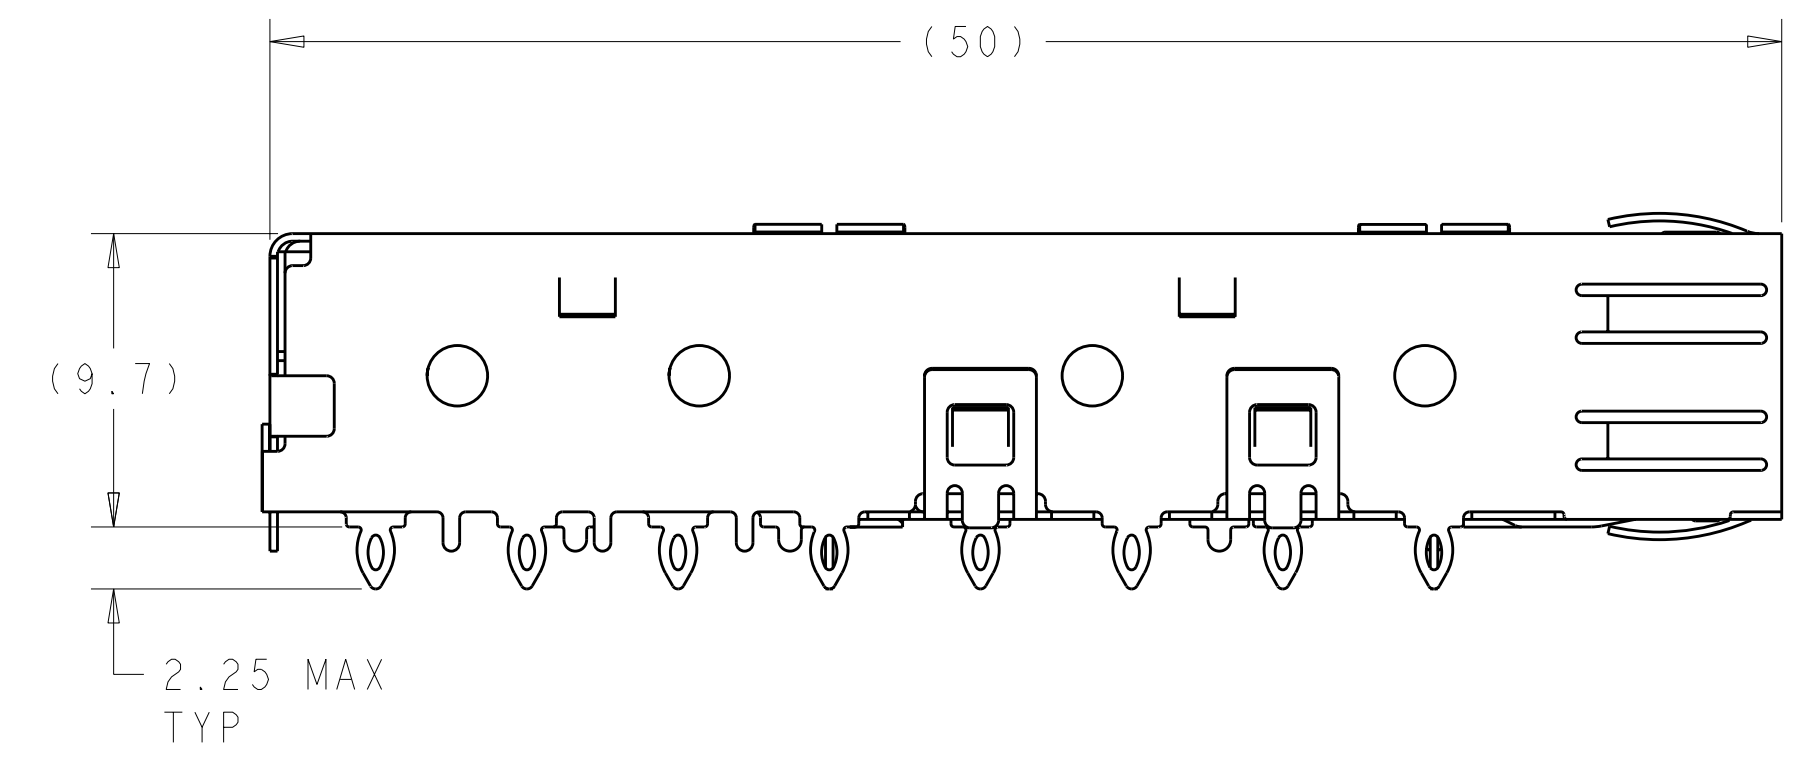

1761014-1
 1X2 CAGE ASSEMBLY
 SCALE 4:1

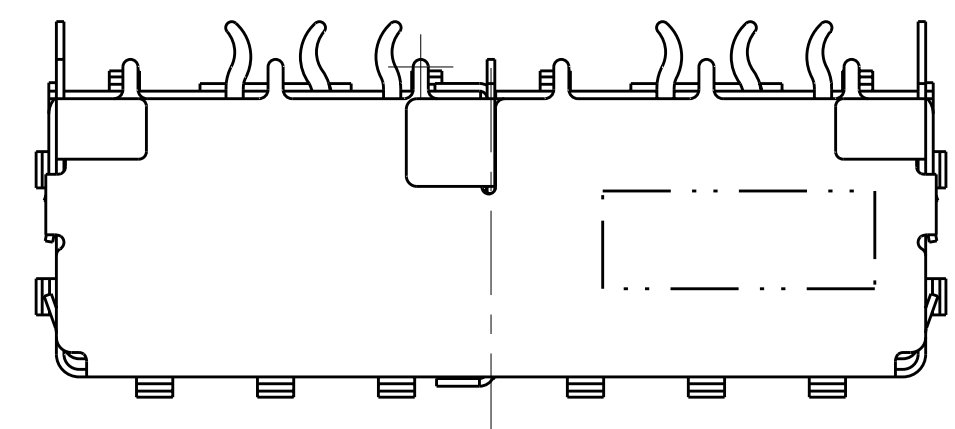

1 x 2 CAGE	1761014-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	W VAN SCYOC	15MAR2004	TE Connectivity ASSEMBLY, CAGE, 1X2 PRESS FIT, SFP						
DIMENSIONS:		CHK	MJ PHILLIPS	15MAR2004							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MJ PHILLIPS	15MAR2004							
mm		PRODUCT SPEC									
0 PLC ± 1 PLC ± 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±°		NAME			RESTRICTED TO						
MATERIAL		FINISH	108-1950	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	114-13120	WEIGHT		
1 2		CUSTOMER DRAWING		SCALE	4:1	SHEET	1	OF	2	REV	D1

