


-Insertion loss must be tested 100%  
 -Return loss must be tested at least  
 by random samples

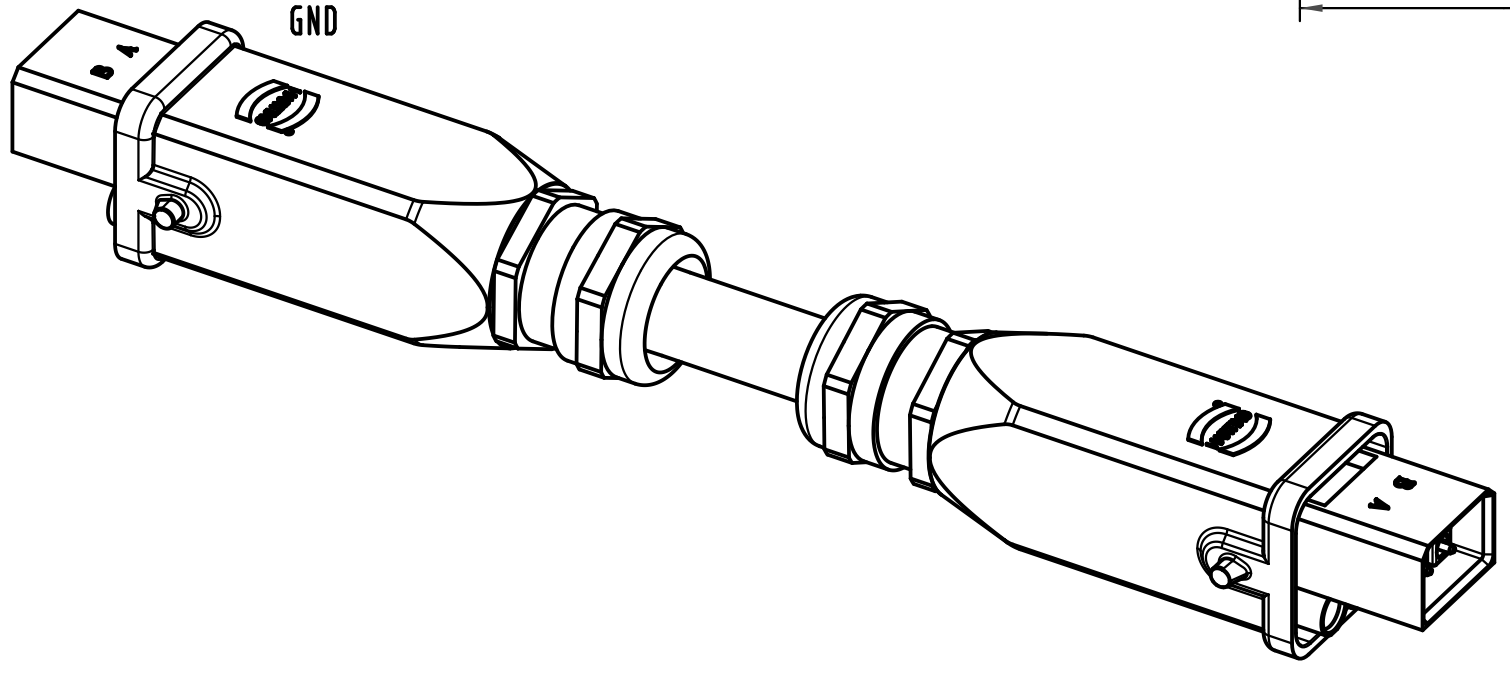

4	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 020 5002	20 (±0.20)m
3	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 010 5002	10 (±0.10)m
2	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 005 5002	5 (±0.05)m
1	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 001 5002	1 (±0.01)m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maße/	
		Dat.	Name	Hybrid cable assembly, FO 2xG50/125 + POWER 3x2.5/3.5, 2xHAN3A, LC duplex MM, 3xpower DC	
		Detail.	06.02.09 MR		
		Insp.			
		Stand.			
S468A Mod.		HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP		TB 33 57 211 xxx 5002 Sub.	
Dat.		Name		Blatt/ page	

Alle Rechte vorbehalten/ All rights reserved