
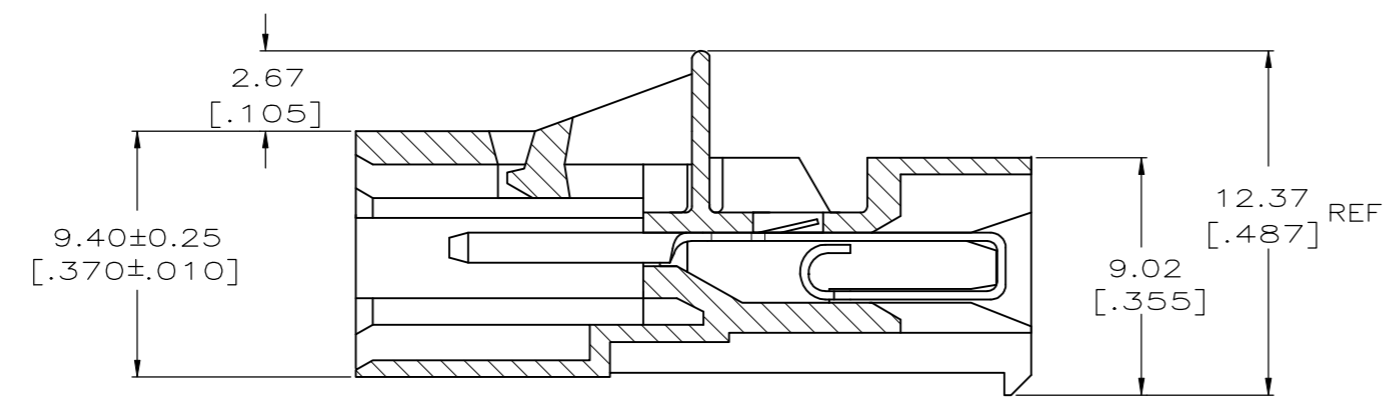
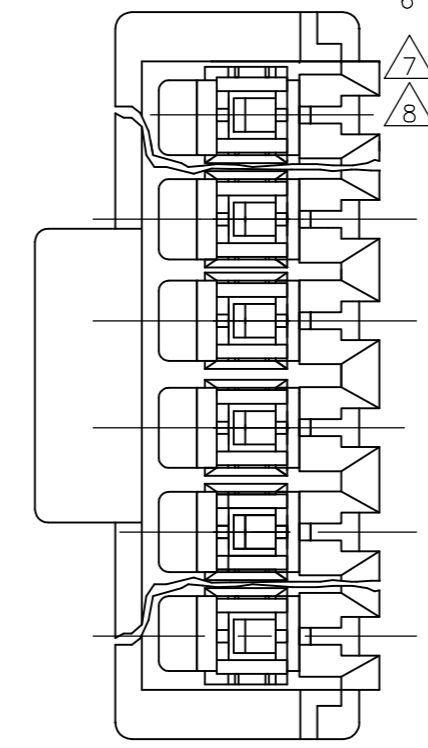
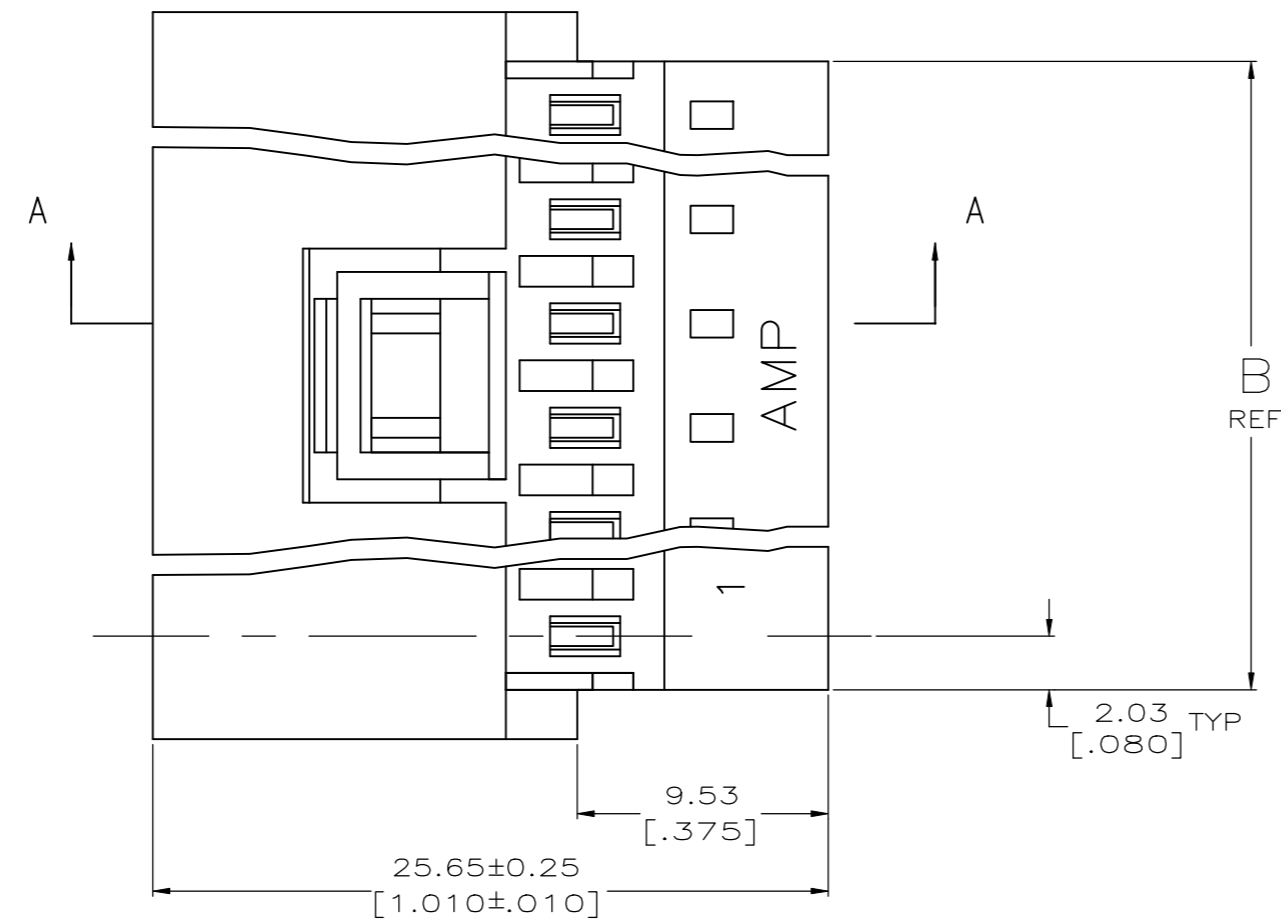


LOC		DIST		REVISIONS		
P	LTR	DESCRIPTION	DATE	DWN	APVD	
H3	REVISED PER	ECR-17-018328	10JAN2018	BDA	SG	

- MATERIAL: CONNECTOR- NYLON UL94V-2 (YELLOW).
 CONTACTS- 0.30 [.012] THK COPPER ALLOY
 (BRIGHT TIN-LEAD 0.00203 [.000080] MIN THK).
 (MATTE TIN 0.00203 [.000080] MIN THK
 FOR CONTACTS 3-641436-2 THRU 5-641436-4)
- CONTACTS ACCEPT #20 AWG SOLID, FUSED STRANDED
 OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX
 INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- NOTE DELETED.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 8 OBSOLETE PARTS

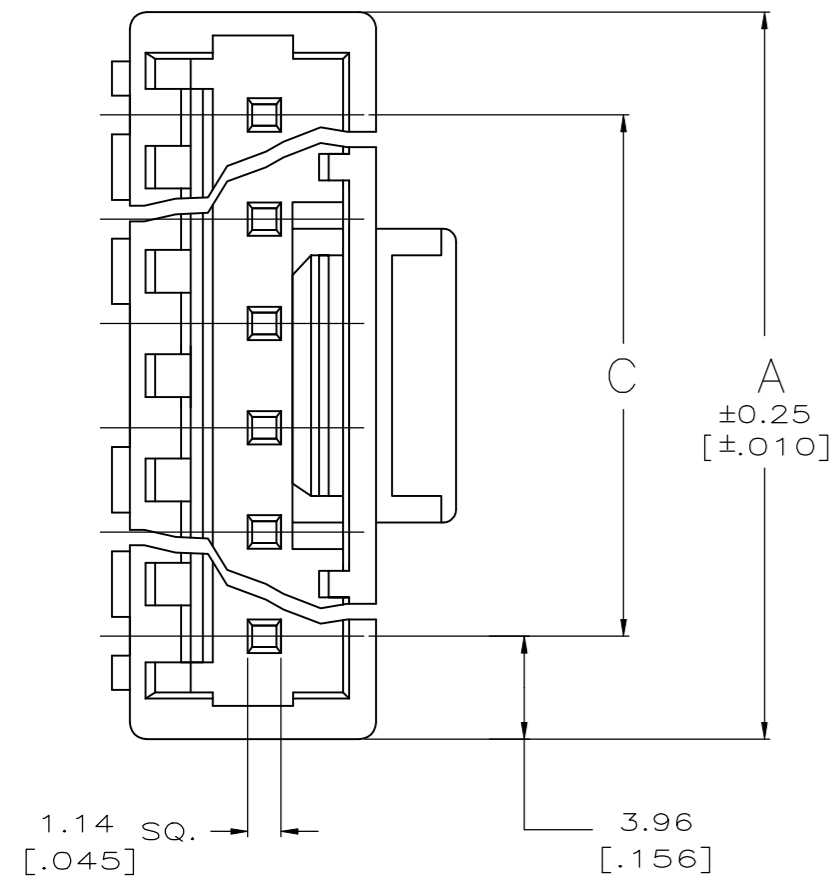

SECTION A-A

FINISH	C	B	A	NO. OF CIRCUITS	PART NUMBER
TIN	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	5-641436-4
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-641436-5
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-641436-2
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-641436-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-641436-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-641436-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-641436-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-641436-2
TIN-LEAD	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	2-641436-4
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	1-641436-5
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	1-641436-2
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	641436-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	641436-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	641436-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	641436-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	641436-2

7 SUPERSEDED
 7 SUPERSEDED
 OBSOLETE
 8 SUPERSEDED
 8 SUPERSEDED
 8 SUPERSEDED
 8 SUPERSEDED

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: K. SALMON 10-22-91
 CHK: R. SWING 10-22-91

TE TE Connectivity

MTA 156
 POSTED CONNECTOR ASSEMBLY,
 20 AWG

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 641436
 SCALE: 5:1 SHEET 1 OF 1 REV: H3

MATERIAL: SEE NOTE 1 FINISH: SEE NOTE 1 WEIGHT: CUSTOMER DRAWING