


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Date Code & Part No., Black Text.
3. Single Centered Marker on Cables of 6" and longer
4. Sweep Tested to validate Max VSWR @ Max Freq.
5. Store Hi-Point Data.

**ConductRF(wk/yr)  
V3A33-TNPTNP-xxx**

**Marker Example**

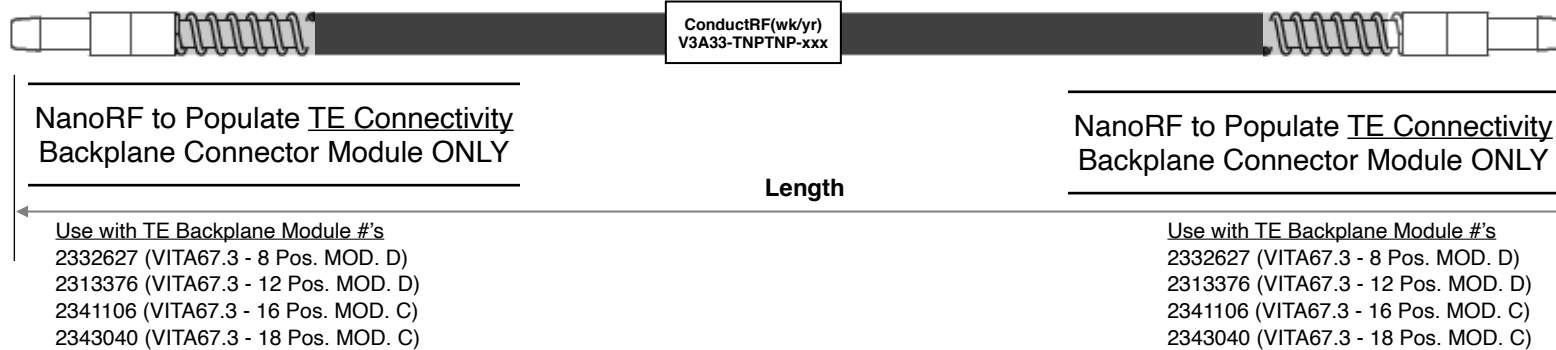


CRF #	Length Inches	Typ. Insertion Loss(dB)		
		6GHz	12GHz	18GHz
S04	4"	0.54	0.77	0.95
S05	5"	0.64	0.90	1.11
S06	6"	0.73	1.03	1.27
S08	8"	0.91	1.29	1.58
S12	12"	1.27	1.81	2.22
S16	16"	1.64	2.32	2.85
S18	18"	1.82	2.58	3.17
S24	24"	2.36	3.36	4.13
VSWR Max.		1.40:1		

**Part No. Configurator - XXX**

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

ITEM	DESCRIPTION	MATERIALS	FINISH
4	Label marker	Shrink Tube	White
3	Cable - Low Loss Flex	A33RFJ	FEP Black
2	NanoRF Pin Contact - BackPlane	CRF-2302345-1	Gold
1	NanoRF Pin Contact - BackPlane	CRF-2302345-1	Gold

					<b>Customer DWG</b>	<b>Title: VITA67.3 NanoRF Backplane Plug Contact Jumper</b>					
					<b>Remarks:</b> 035/035/5	<b>Originated:</b> 11/13/20	<b>Conduct RF</b> sales@ConductRF.com Tel: +1 978 374 6840	<b>Range:</b> VITA	<b>Sheet 1 of 1</b>		
					2	Added Module Ref.	DG	02/11/21	Dwg Ref: V3A33-TNPTNP		
					1	Pre-Release	DG	11/13/20			
<b>REV.</b>	<b>DESCRIPTION</b>	<b>ECN</b>	<b>DRAWN</b>	<b>DATE</b>	<b>Length Tolerances:</b> ≤24" = ±0.25" >24" = ± 1%	<b>Checked:</b> JW	<b>Approved:</b> PL	<b>Rev:</b> 2	<b>Part No:</b> <b>V3A33-TNPTNP-XXX</b>		
<b>REVISION HISTORY</b>											