
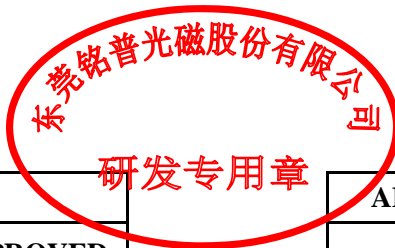


## Product Specification for Approval

WE ARE PLEASED IN SUBMITTING OUR SAMPLES WITH SPECIFICATION TO YOU FOR APPROVAL.

CUSTOMER	:		
DESCRIPTION	:	<b>10/100 BASE-T TRANSFORMER</b>	
MNC P/N	:	<b>H4807CG</b>	
VERSION	:	<b>A0</b>	
CUSTOMER P/N	:		
ISSUED DATE	:	<b>2020/04/27</b>	
PHOTO OF PRODUCT	:		
WEIGHT	:		<b>2.80g</b>
MADE IN	:		<b>CHINA</b>



APPROVED BY MNC			APPROVED BY CUSTOMER
<b>PREPARED BY</b>  研发部 2020-04-27 符晶晶	<b>CHECKED BY</b>  研发部 2020-04-27 肖明华	<b>APPROVED BY</b>  研发部 2020-04-27 何校民	<b>SIGNATURE OR STAMP</b>  

1. PLEASE SEND BACK US A COPY OF THE SPECIFICATION WITH YOUR STAMP OR SIGNATURE ONCE THE SAMPLES APPROVED.
2. IT WILL BE DEEMED THE SAMPLES TO BE APPROVED IF NO FEEDBACK.

东莞铭普光磁股份有限公司  
 Add: Shipai Town, Dongguan City, Guangdong Province, China

TEL: +86-769-86921000  
 FAX: +86-769-81701563



**HISTORY FOR REVISED SPECIFICATION**

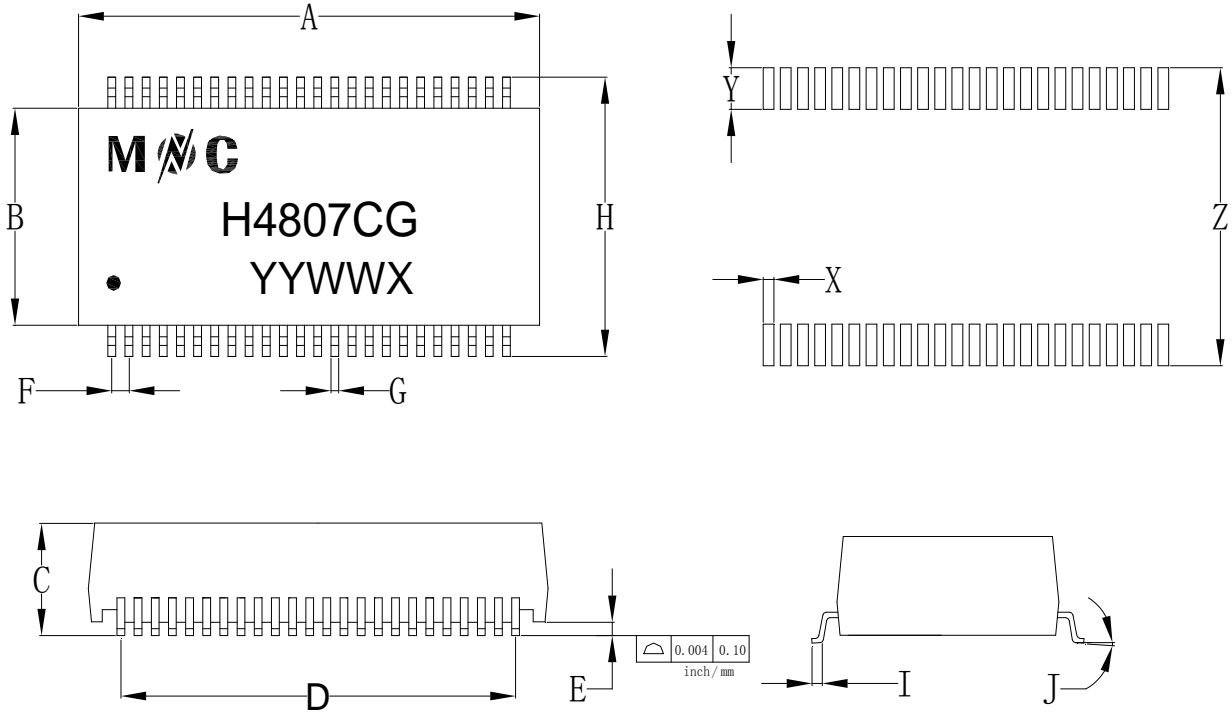
**Part No. H4807CG**

**INDEX**

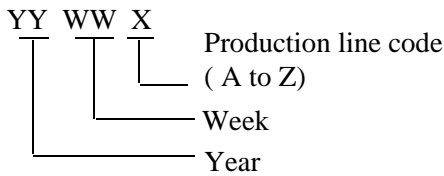
1. INDEX----- 1  
2. CHANGE RECORD----- 1  
3. MECHANICAL----- 2  
4. SCHEMATIC----- 3  
5. PACKING----- 4  
6. MATERIAL LIST----- 5  
7. RECOMMENDED SOLDERING PROFILE----- 6

**CHANGE RECORD**

<b>REV.</b>	<b>DESCRIPTION (Content or Reason For Change)</b>	<b>DATE</b>	<b>REVISOR</b>
A0	INITIAL RELEASE	2020-04-27	Jingjing Fu

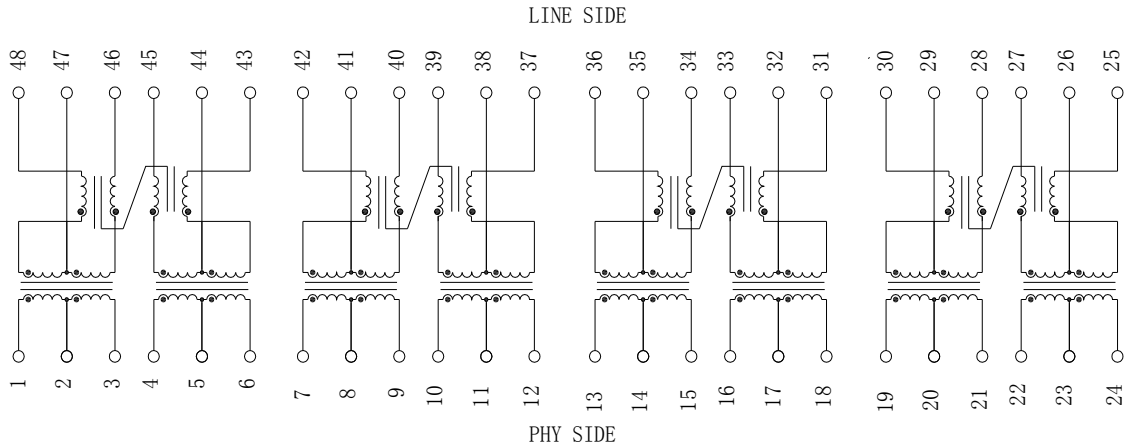
**SPECIFICATION**
**Part No. H4807CG**
**A. MECHANICAL:**


Note: Laser printing marking

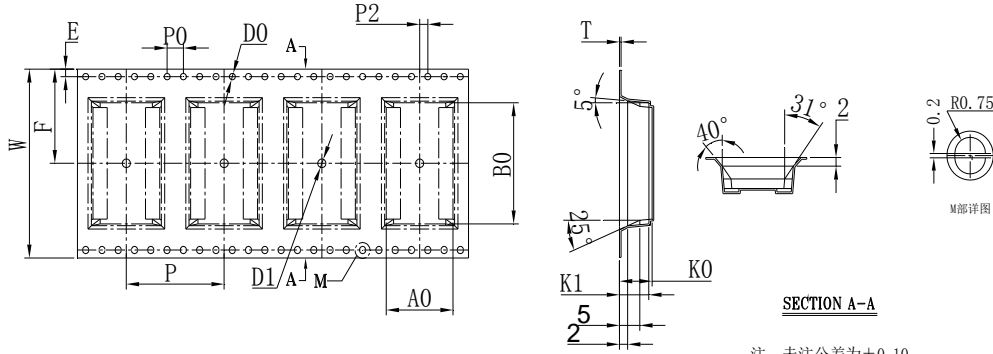


1. UNITS: mm/inch.
2. UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE: TYPICAL
3. PIN LENGTH DON'T INCLUDE SOLDER POINT

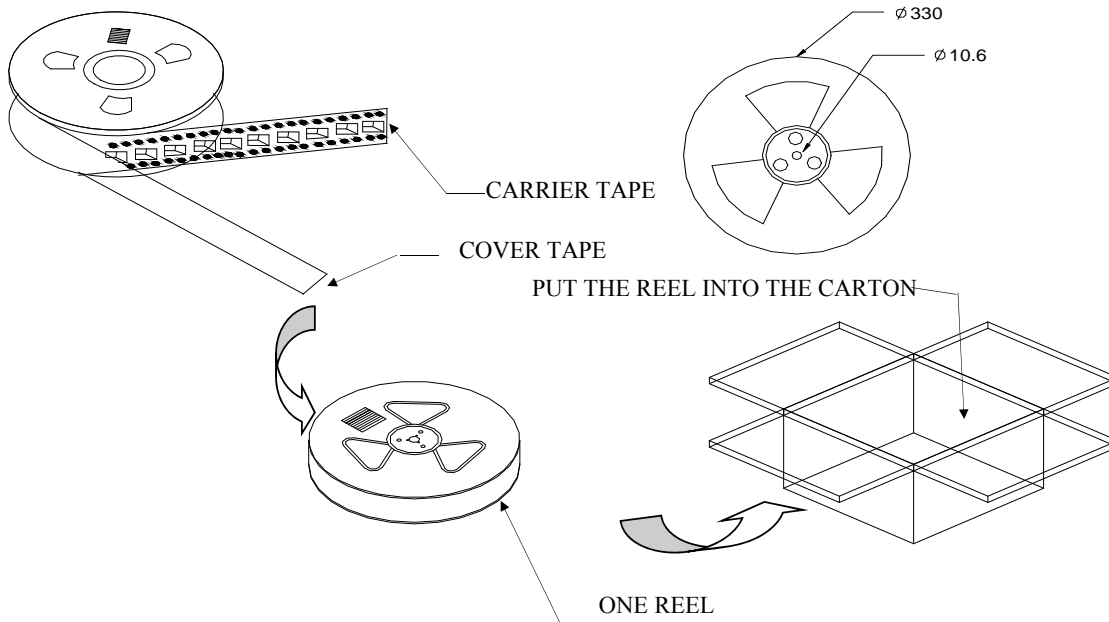
DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	27.30	27.80	28.30	1.075	1.094	1.114
B	11.90	12.40	12.90	0.469	0.488	0.508
C	/	/	7.50	/	/	0.295
D	22.96	23.46	23.96	0.904	0.924	0.943
E	0.15	0.30	0.45	0.006	0.012	0.018
F	0.87	1.02	1.17	0.034	0.040	0.046
G	0.28	0.38	0.48	0.011	0.015	0.019
H	14.74	15.24	15.74	0.580	0.600	0.620
I	/	0.85	/	/	0.033	/
J	0°	/	8°	0°	/	8°
X	/	0.64	/	/	0.025	/
Y	/	2.34	/	/	0.092	/
Z	/	17.20	/	/	0.677	/

**SPECIFICATINON**
**Part No. H4807CG**
**B. SCHEMATIC :**

**C. ELECTRICAL SPECIFICATION @25°C**

ITEM	SPECIFICATION	TEST CONDITION	TEST EQUIPMENT
INDUCTANCE :	350uH MIN.	100KHz 0.2V 8mA DC Bias	TH2819XB OR EQU.
LEAKAGE INDUCTANCE :	0.50uH MAX.	100KHz 0.2V	TH2819XB OR EQU.
INTERWINDING CAPACITANCE :	25pF TYP.	100KHz 0.2V	TH2819XB OR EQU.
DC RESISTANCE :	1.4Ω MAX.	AT 25 °C	TOS 8020 OR EQU.
TURNS RATIO :	1CT:1CT±5%		TH2819XB OR EQU.
POLARITY :	1-48,5-44,7-42,11-38,13-36,17-32,19-30,23-26 IN-PHASE		
INSERTION LOSS :	-1.1dB MAX.	0.5-100 MHz	E5061A OR EQU.
RETURN LOSS :	-18dB MIN.	0.5-30 MHz	E5061A OR EQU.
	-18+20*log(f/30)dB MIN.	30.1-60MHz	
	-12dB MIN.	60.1-80MHz	
CROSS TALK :	-35dB MIN.	0.5-40 MHz	E5061A OR EQU.
	-33+20*log(f/50)dB MIN.	40.1-100 MHz	
CMRR :	-30dB MIN.	0.5-100 MHz	E5061A OR EQU.
ISOLATION HI-POT :PRI TO SEC	1500VAC	1mA,60S	7152AB OR EQU.
	1650VAC	1mA,6S	
OPERATING TEMPERATURE	0°C to 70°C		

**PACKAGE**
**Part No. H4807CG**
**D. PACKING:**
**a. PACKAGING AS BELOW (ONLY FOR A REFERENCE):**


ITEM	W	A <sub>0</sub>	B <sub>0</sub>	K <sub>0</sub>	K <sub>1</sub>	P	F	E	D <sub>0</sub>	D <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	T
DIM	44.0 <sup>+0.30</sup> <sub>-0.30</sub>	16.4 <sup>+0.10</sup> <sub>-0.10</sub>	28.2 <sup>+0.10</sup> <sub>-0.10</sub>	8.00 <sup>+0.10</sup> <sub>-0.10</sub>	7.20 <sup>+0.10</sup> <sub>-0.10</sub>	24.0 <sup>+0.10</sup> <sub>-0.10</sub>	20.2 <sup>+0.10</sup> <sub>-0.10</sub>	1.75 <sup>+0.10</sup> <sub>-0.10</sub>	1.50 <sup>+0.10</sup> <sub>-0.10</sub>	1.50 <sup>+0.10</sup> <sub>-0.10</sub>	4.00 <sup>+0.10</sup> <sub>-0.10</sub>	2.00 <sup>+0.10</sup> <sub>-0.10</sub>	0.40 <sup>+0.05</sup> <sub>-0.05</sub>
ALTERNATE													


**b. Q'TY:**

300 PCS PER REEL  
 5 REELS PER CARTON  
 1500 PCS PER CARTON

**c. LABEL:**

**REMARK:**

ABOVE PACKING IS FOR YOUR REFERENCE ONLY, WHICH MIGHT BE CHANGED WITHOUT NOTICE.

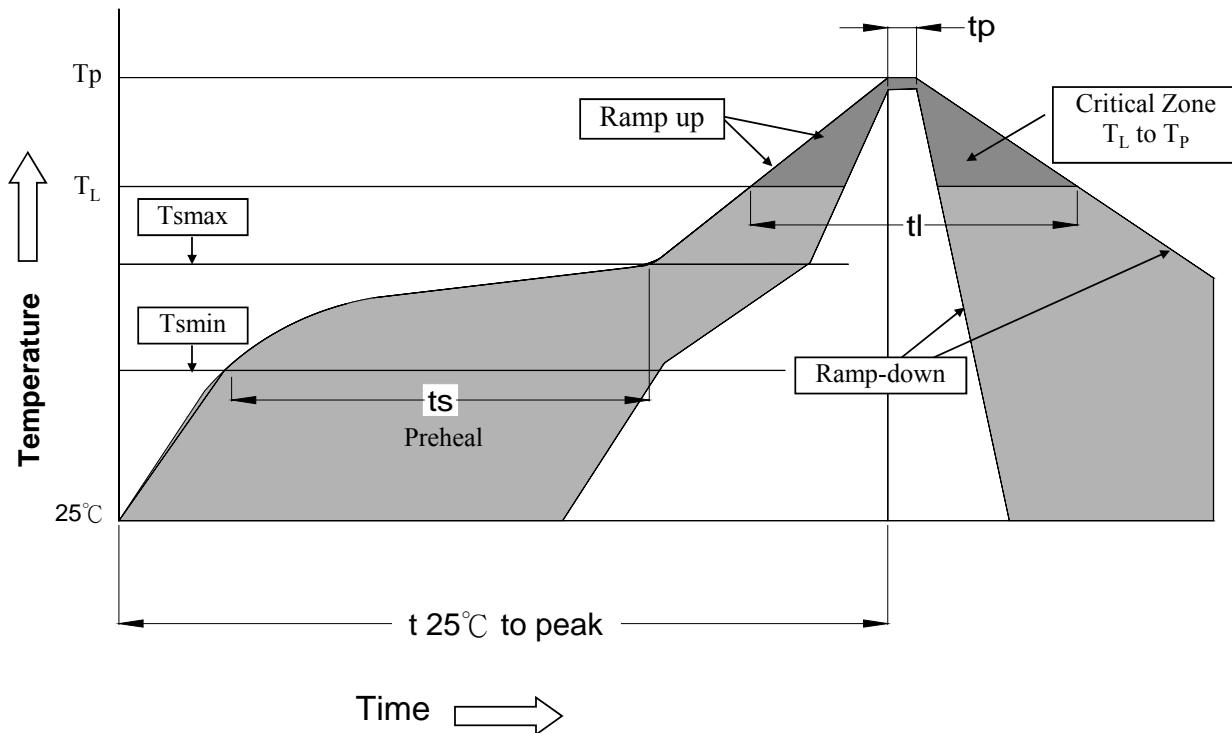
**MATERIAL LIST**
**Part No. H4807CG**
**E.BOM**

<b>MATERIAL LIST</b>					
<b>NO.</b>	<b>ITEM</b>	<b>MATERIAL</b>	<b>RATING</b>	<b>SUPPLIER OF MATERIAL</b>	<b>UL</b>
<b>1</b>	<b>CORE</b>	<b>Mn-Zn</b>	-----	<b>YEAN SHING</b>	N/A
			-----	<b>ZHONGSHAN CRC ELECTRONICS FACTORY</b>	N/A
		<b>Ni-Zn</b>	-----	<b>YEAN SHING</b>	N/A
			-----	<b>ZHONGSHAN CRC ELECTRONICS FACTORY</b>	N/A
<b>2</b>	<b>COPPER WIRE</b>	<b>QPN180</b>	<b>180℃</b>	<b>ZHUHAI SUNTEK WIRE CO.,LTD</b>	<b>E234867</b>
		<b>Polysol 180</b>	<b>180℃</b>	<b>ELEKTRISOLA(MALAYSIA) SDN.BHD.</b>	<b>E258243</b>
<b>3</b>	<b>CASE</b>	<b>WH-9100</b>	<b>V-0</b>	<b>WAH HONG INDUSTRIAL CORP</b>	<b>E150608</b>
<b>4</b>	<b>PIN</b>	<b>C5191</b>	-----	<b>SHENZHEN MINGSCHIN INDUSTRIAL MATERIAL CO.,LTD</b>	N/A

**RECOMMENDED REFLOW SOLDERING PROFILE**

**Part No. H4807CG**

**a. RECOMMENDED REFLOW SOLDERING PROFILE:**



$T_L = 217^\circ\text{C}$

$T_p = 260^\circ\text{C}$

$t_s = 60-180\text{s}$      $T_s \text{ max} = 200^\circ\text{C}$      $T_s \text{ min} = 150^\circ\text{C}$

$t_L = 60-150\text{s}$      $t_p = 10\text{s}$      $T_{25^\circ\text{C to peak}} = 8\text{min max}$

Ramp up rate =  $3^\circ\text{C/s max}$

Ramp down rate =  $6^\circ\text{C/s max}$

\*RoHS Compliant

\*Solder Paste SAC 305 Sn 96.5/Ag 3.0/Cu 0.5

\*Silkscreen thickness: 0.15mm Min

**b. MOISTURE SENSITIVE LEVEL:**

b.1. LEVEL: 1

b.2. SHELF LIFE: UNLIMITED

b.3. STORAGE CONDITION:  $\leq 30^\circ\text{C}/85\% \text{ RH}$