

Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 0.47uF 6.3V(0603B474K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.15/-0.10	0.80±0.15/-0.10	0.80±0.15/-0.10


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 6.3V, 120sec)

Item	Spec
Cap [uF]	0.47 (±10%)
DF	≤ 10%
IR [G-ohm]	>0.213


3. Impedance/ESR-Frequency

(Equipment: 4294A)

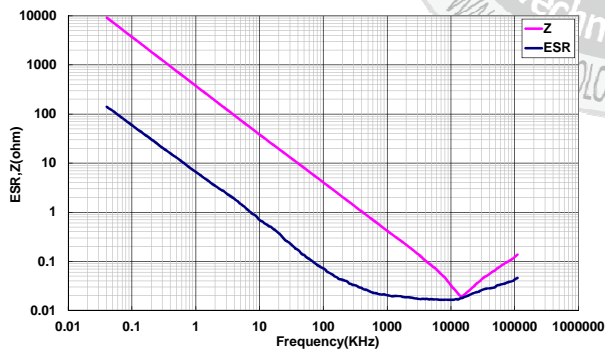


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

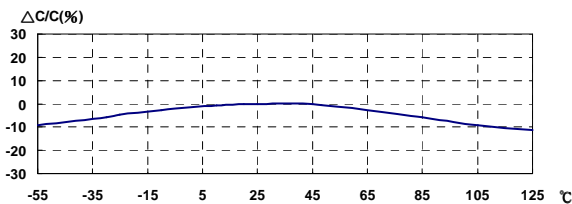

5. Temperature Rise – Ripple Current


(Equipment: 11810)

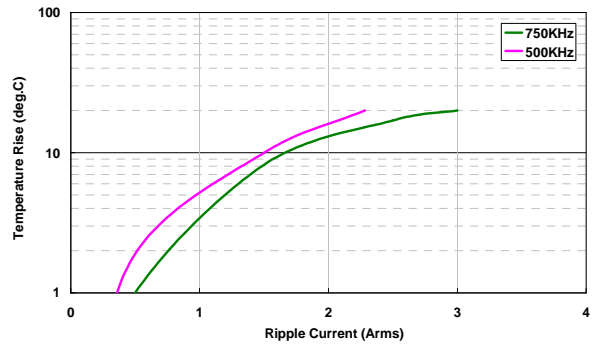

6. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

3.15V : 2.12% ; 6.3V : -6.69%

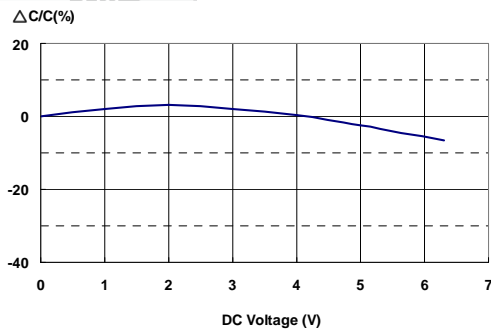

7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

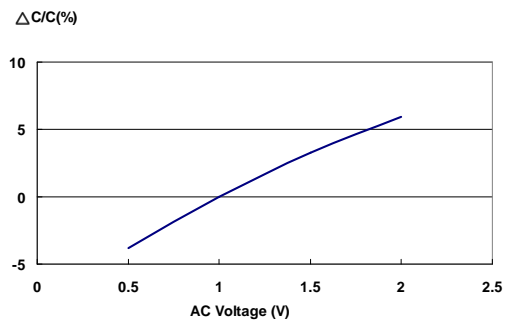

Last updated : 2018/06/19