

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

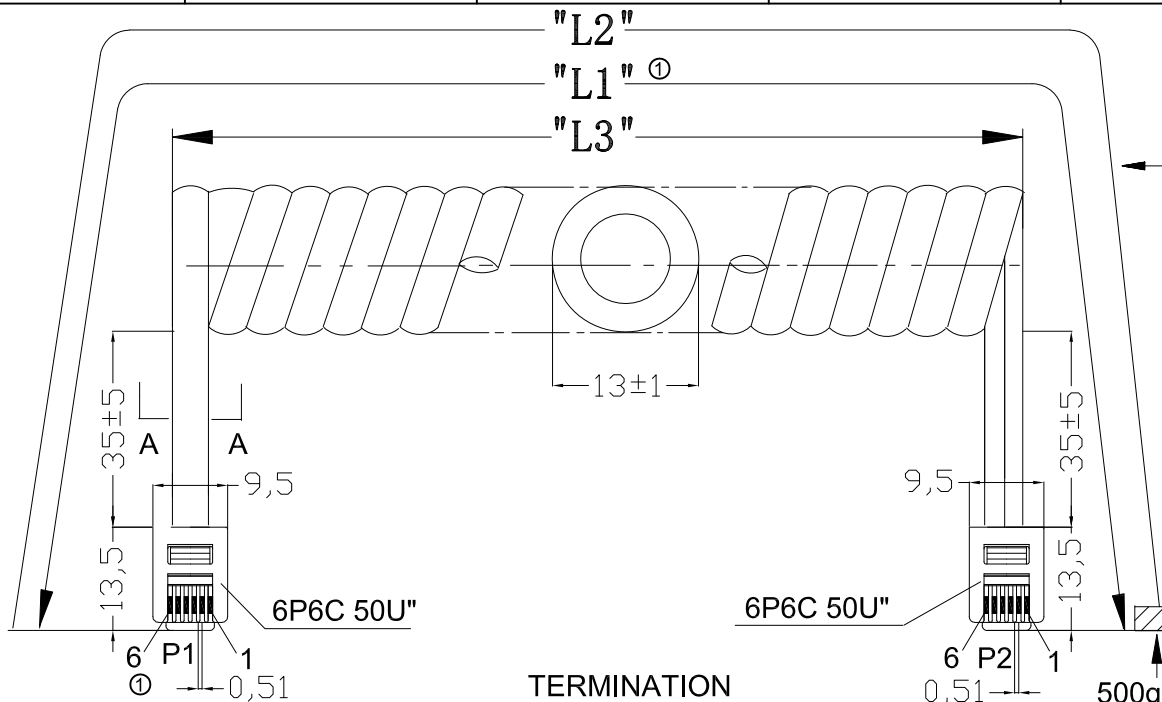

Extended length is with 500g of force

Note for plug:

Material:

Housing-Polycarbonate,clear.

Terminal-0.36[.014] thick phosphor bronze.

Thick gold in localized gold plate.

Area,Gold flash over the remainder.


Over 2.54mm[.000100] thick nickel underplate.

① Conductor: [26AWG(0.12x12) BARE COPPER]x6C.

① Insulation: (PP6331 ID:0.95-1.0)x6C.

① Jacket: PVC NOUL 80P.

① Package: Individual PE Bag.

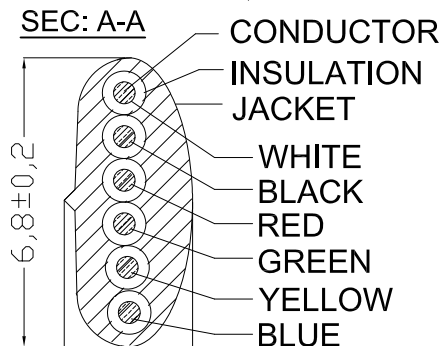

TERMINATION

P1		P2
1	White	1
2	Black	2
3	Red	3
4	Green	4
5	Yellow	5
6	Blue	6

Order code: AT-C-26-6/6/X-XX/R ①

Order color:
B: Black
W: White
S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	540±50	5.0FT-5.75FT	2600-2700
7	740±50	7.0FT-8.05FT	3700-3900
10	1000±50	10.0FT-11.5FT	5000-5200
12	1300±50	12.0FT-13.8FT	6400-6600
14	1350±50	14.0FT-16.1FT	6900-7100
25	3400±50	25.0FT-28.75FT	13200-13400

2,4±0,2
RoHS compliant
Unit: mm

Scale	Free	Date	Name	Customer-No.			
TOLERANCE		Drawn	18.12.2017	Amy			
.x	±0.50	Approved	08.05.2019	Amy			
.xx	±0.20						
DIM	TOL	Drawing-No.					
①	Update the notes, the pin assignment and add the cut length	08.05.2019	Segal	ASSMANN WSW-No. AT-C-26-6/6/X-XX/R			
②	Drawn	18.12.2017	Amy				
Angle	±2°	Id.	Modification	Date	Name		Drawing-No. ASS 8163 CA rev01
							Replace

1

2

3

4

5

6

7