
	т (С. 2007) Т (С.						
CHARACTERISTICS Standard: Stased on ML-OTL-38999 Series II Standard: Stased on ML-OTL-38999 Series II Stell Mitchial i Auminium Stell Stream i Auminium Auss : 2 88 8 g t 10% Auss : 2 88 8 g t 10% Auss : 2 88 8 g t 10% Stell Stream : 0 0 mitchial molteck Stell Stream : 0 0 mitchial Stell Stream : 0 0 mitchial Mass : 2 88 8 g t 10% Mass : 2 8 8 9 g t 10% Mitchial : 0 0 mitchial Opti mitchial	4		4				
Standard:			3				
CHARCTERISTICS Shell Material: Itased on ML/DT-38999 Series III Homorators in Thermoplastic Contacts: itases compare follow Sold RIAD Series - Contact Plating: itage ita							
- Standard : Based on MiL-DT-38999 Series III - Shell Material: ::::::::::::::::::::::::::::::::::::							
Shell Material :: Aluminium Shell Material :: Mickel -insulator : Thermoplastic -contacts :: Copper Alloy -seals & Grommet :: Silkon Elastomer - Contact fraing :: Gold over copper Alloy Quam minimum - Durability ::: Souriact Maing - Delevered with Souriau contacts and Accessories ::: Souriact Maing - Temperature Range ::: 65°C to +200°C - Salt Spray ::: 48 hours - Mass ::: 288 9 g :: 10% BASIC SERIES: ::: 80 SHELL TYPE :: Nickel - CONTACT TYPE ::: Standard Crimp Contact SHELL SIZE :: 17 .:: CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE<:: Standard Crimp Contact	Connector unitension						
Shell Plating : Nickel -Insulator ::::::::::::::::::::::::::::::::::::	Shell Material Aluminium						
-Insulator : Thermoplastic -Contacts : Copter Alloy -Seals & Grommet : Silicon Elastomer -Dortact Plating : Godd ver copper Alloy 0.8µm minimum -Durability : S00 Mating cycles -Delivered with Souriau contacts and Accessories PN: 8D517F08AC -Temperature Range : 66'C to + 200'C -Sait Spray : 48 hours -Mass : 28.89 g ± 10% -Assic SERIES: 80 -SHELL TYPE : Plug with Rfl Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 If a contact with the prevention of the prev	2 31 Max						
-Contacts £ Copper Alloy -Seals & Grommet Silicon Elastomet Sold over copper Alloy 0.8µm minimum -Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm minimum <u>Durability Sold over copper Alloy 0.8µm <u>Durability Sold over copper Alloy 0.8µm <u>Durability Sold over copper Alloy 0.8µm <u>D</u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u></u>		the Specifications issued by either of the Parties or by a third party					
Contact Plating :: Gold over copper Alloy 0.8µm minimum - Contact Plating :: Gold over copper Alloy 0.8µm minimum - Durability :: 500 Mating cycles PN: 8D517F08AC 2 - Durability :: S00 Mating cycles - PN: 8D517F08AC - PN: 8D517F08AC <td></td> <td>(professional recommendation, technical notice.)</td> <td></td>		(professional recommendation, technical notice.)					
Point Plating : Gold over copper Alloy 0.8µm minimum Image: Gold over copper Alloy 0.8µm minimum PR Not Listed 2 -Durability :: S00 Mating cycles -Delivered with Souriau contacts and Accessories PN: 8D517F08AC 2 -Temperature Range :: 65°C to +200°C -Sait Spray :: 48 hours - - -Mass : 28.89 g ± 10% MOD N ⁺ - MOD N ⁺ - MOD N ⁺ BASIC SERIES: 80 5 - 17 F 08 A C - - Scale Customert is the property of Sources: The communicated without permission NPRDS / PROJECT - - - Sources: The communicated without permission NPRDS / PROJECT - <td< td=""><td></td><td>Country Jurisdiction & Control List</td><td></td></td<>		Country Jurisdiction & Control List					
-Delivered with Souriau contacts and Accessories -Temperature Range: -65°C to +200°C -Salt Spray ::48 hours -Mass ::28.89 g ± 10% BASIC SERIES: 8D SHELL TYPE: Plug with RFI Shielding CONTACT TYPE: :Standard Crimp Contact SHELL TYPE: F 08 C ORIENTATION : C SOURIAU SHELL SIZE: 17 F 08 CONTACT TYPE: :Standard Crimp Contact SHELL SIZE: 17 F NR CONTACT TYPE: :Standard Crimp Contact Shell SiZE: 17 F NR CONTACT TYPE: :Standard Crimp Contact Shell SiZE: 17 F Nickel CONTACT TYPE: :Standard Crimp Contact Source of the property of contact without permission Contact Layout 17:0e Source of the property of contact without permission Contact Layout 17:0e Source of the property of All All All All All All All All All Al	Contact Plating : Gold over copper Alloy 0.8μm minimum		2				
- Temperature Range : -65°C to +200°C - Salt Spray : : 28.89 g ± 10% - Mass : : 28.89 g ± 10% BASIC SERIES: 8D SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 ORIENTATION : C PLATING : F = Nickel CONTACT TYPE : Standard Crimp Contact BHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) PLATING : F = Nickel	-Durability : 500 Mating cycles	-Durability : 500 Mating cycles					
-Salt Spray : 48 hours -Mass : 28.89 g ± 10% Mass : 28.89 g ± 10% BASIC SERIES: 8D 5 - 17 F 08 A C SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 PLATING : F = Nickel CONTACT TYPE : Pink(500 Matings) CONTACT TYPE : Pink	-Delivered with Souriau contacts and Accessories	PN: 8D517F08AC					
-Salt Spray : 48 hours -Mass : 28.89 g ± 10% -Mass : 28.89 g ± 10% BASIC SERIES: 8D 5 - 17 F 08 A C SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 PLATING : F = Nickel DESIDENTIATION : C SHELL SIZE : 17 Desident distribution by CONTACT TYPE : PIN(S00 Matings) CONTACT TYPE :	-Temperature Range -65°C to +200°C						
BASIC SERIES: 8D 5 17 F 08 A C ITTLE Aluminium Plug 8D series BASIC SERIES: 8D 5 17 F 08 A C SCALE General linear NPRDS / PROJECT SHELL TYPE : Plug with RFI Shielding Image: CONTACT TYPE : Standard Crimp Contact ORIENTATION : C NA SCALE NPRDS / PROJECT SHELL SIZE : 17 Image: CONTACT TYPE : PIN(S00 Matings) CONTACT TYPE : PIN(S00 Matings) SOURIAU This document is the property of sOURIAU.COM SOURIAU PLATING : F = Nickel Image: CONTACT TYPE : PIN(S00 Matings) CONTACT LAYOUT : 17:08 FORMAT SOURIAU DRG N° SHEET A3 8D517F08AC-C 1/2	-Salt Spray : 48 hours						
BASIC SERIES: 8D 5 17 F 08 A C SHELL TYPE : Plug with RFI Shielding 0			<u> </u>				
BASIC SERIES: 8D 5 - 17 F 08 A C SHELL TYPE : Plug with RFI Shielding -							
BASE SENES. ab 3 17 F 08 A C Tolerances: 1/2 SHELL TYPE : Plug with RFI Shielding NA 859 CONTACT TYPE : Standard Crimp Contact							
CONTACT TYPE : Standard Crimp Contact ORIENTATION : C SOURIAU This document is the property of SOURIAU.COM SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 17-08 FORMAT SOURIAU DRG N° communicated without permission PLATING : F = Nickel CONTACT LAYOUT : 17-08 FORMAT SOURIAU DRG N° source SHEET 1/2		Tolerances:					
SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) SOURIAU it must not be reproduced or communicated without permission PLATING : F = Nickel CONTACT LAYOUT : 17-08 FORMAT SOURIAU DRG N° SHEET A3 8D517F08AC-C 1/2		This document is the property of	_ '				
PLATING : F = Nickel FORMAT SOURIAU DRG N° A3 8D517F08AC-C 1/2		SOURIAU WWW.SOURIAU.COW it must not be reproduced or					
A3 8D517F08AC-C 1/2							
	PLATING : F = NICKEI CONTACT LAYOUT : 17-08	SOUNIAU DIVU N					
		00001/100//000					

_	т	۵	н т	m	D	0	
		Contact Layout					
4	-х ($ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & $					
	Conta position A B C C D E F	Contacts (Insert arrangement 17-8) tocation X-axis Y-axis (mm) (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.230 (5.84) 078 (1.96) +.094 (2.39) 216 (5.49)					
ယ	G H Shell Arrangement Nun size no. cor	128 (3.25) +.086 (2.18)					
	L						
						SOURIAU shall not be liable due to a use of the Produ the Specifications issued by ei (professional recomm	ucts w ither o
N						PN: 8D5	Count FR 517
					A 14-10-20 ISS DATE Designed By:	016 First Release	
					TITLE	Al	umiı
<u> </u>					SCALE NA	General I Toleran ±	ices:
					SOURIA	U WWW.SOURIA	4U.(
					FORMAT A3	SOUR 8D5:	
_	Н	G	F	E	D	C	

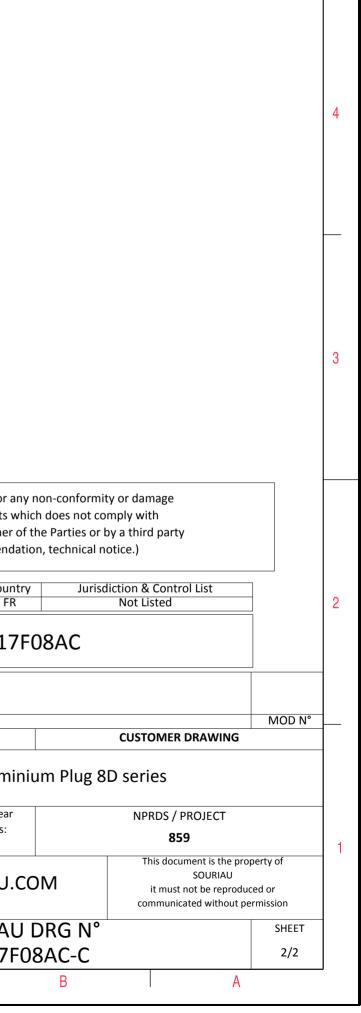

 \triangleright

σ