


- NOTES:**
- MATERIALS:**
 HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
 FRONTSEALING: SILICONE VMQ BLUE
 CABLE SEALING: NBR BLACK
 JACK-SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
 CABLE STRAIN RELIEF: STEEL, NI-PLATED
 SCREWS: STEEL, NI-PLATED
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED
 - TEMPERATURE RANGE: -30°C TO +80°C
 - RECOMMENDED TORQUE FOR SCREW:
 35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED

* COMPLETELY TIGHTENED

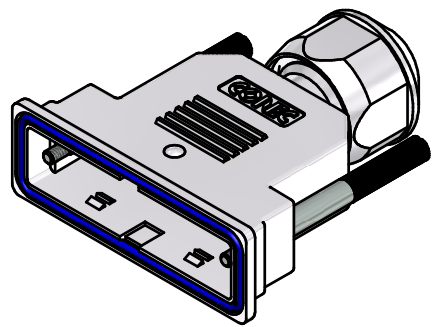

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 1,5:1 (1:1)		
	±0,3 unless otherw. specified				material: SEE TABLE		
				date	name	title: WATER RESISTANT D-SUB HOOD 25 pos. shielded 4-40UNC jackscrew / stainless steel	
				drawn	07.02.2014		Heinrich
				appd.	07.02.2014		Huether
				norm			
			d-old	15K1A1154			
1 x b	Ä 5092	12.03.14	Heinrich	dwg no:		DIN-A3 sh: 1	
a	Origin			15K1A1440			
rev.	description	date	name	part no:		15-004780	

