

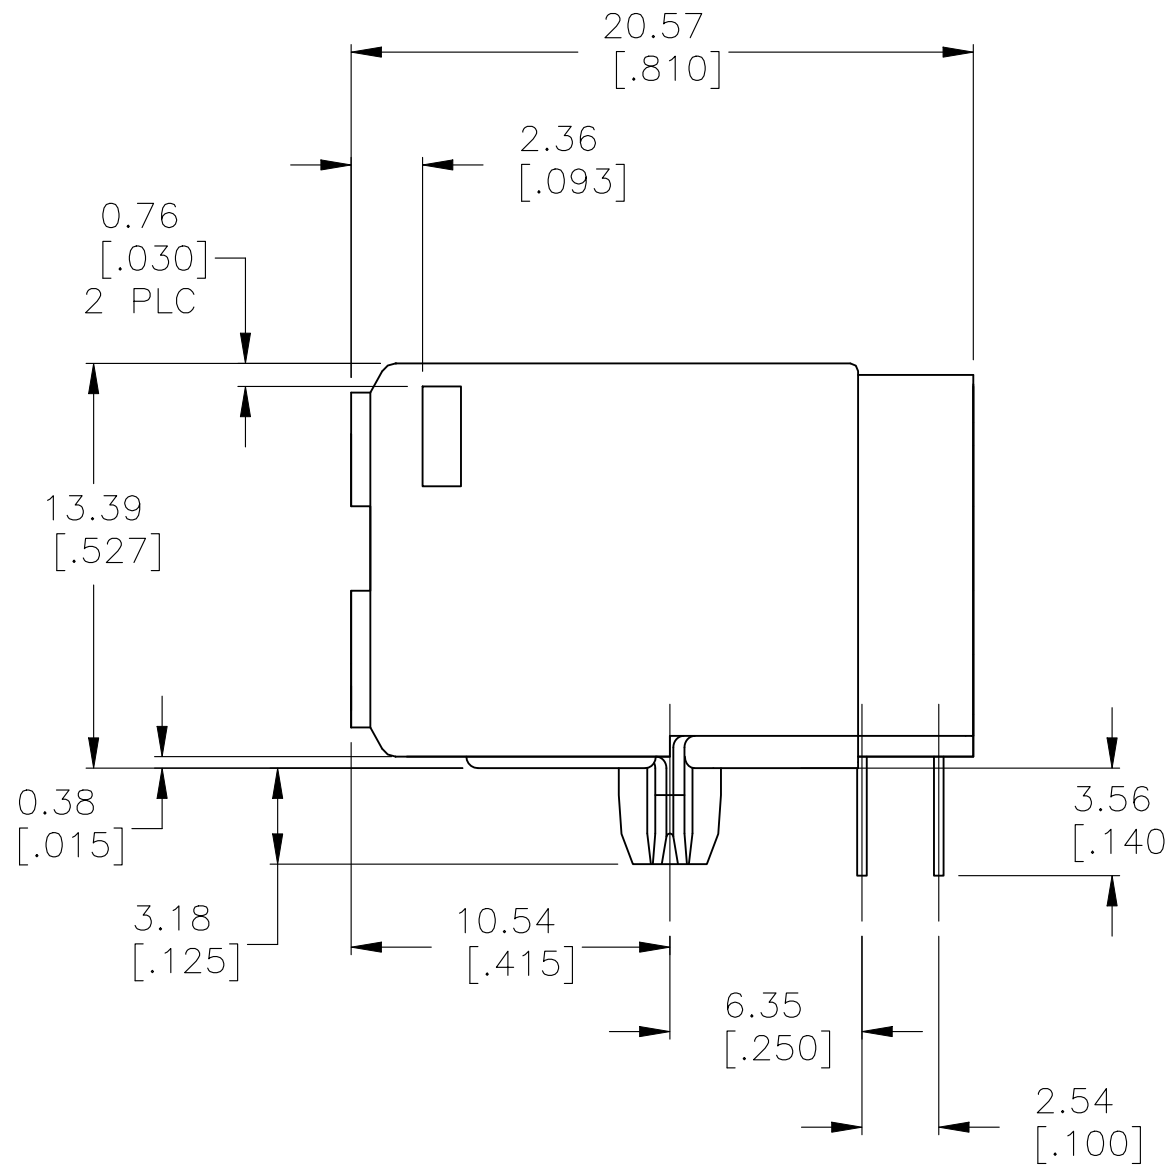
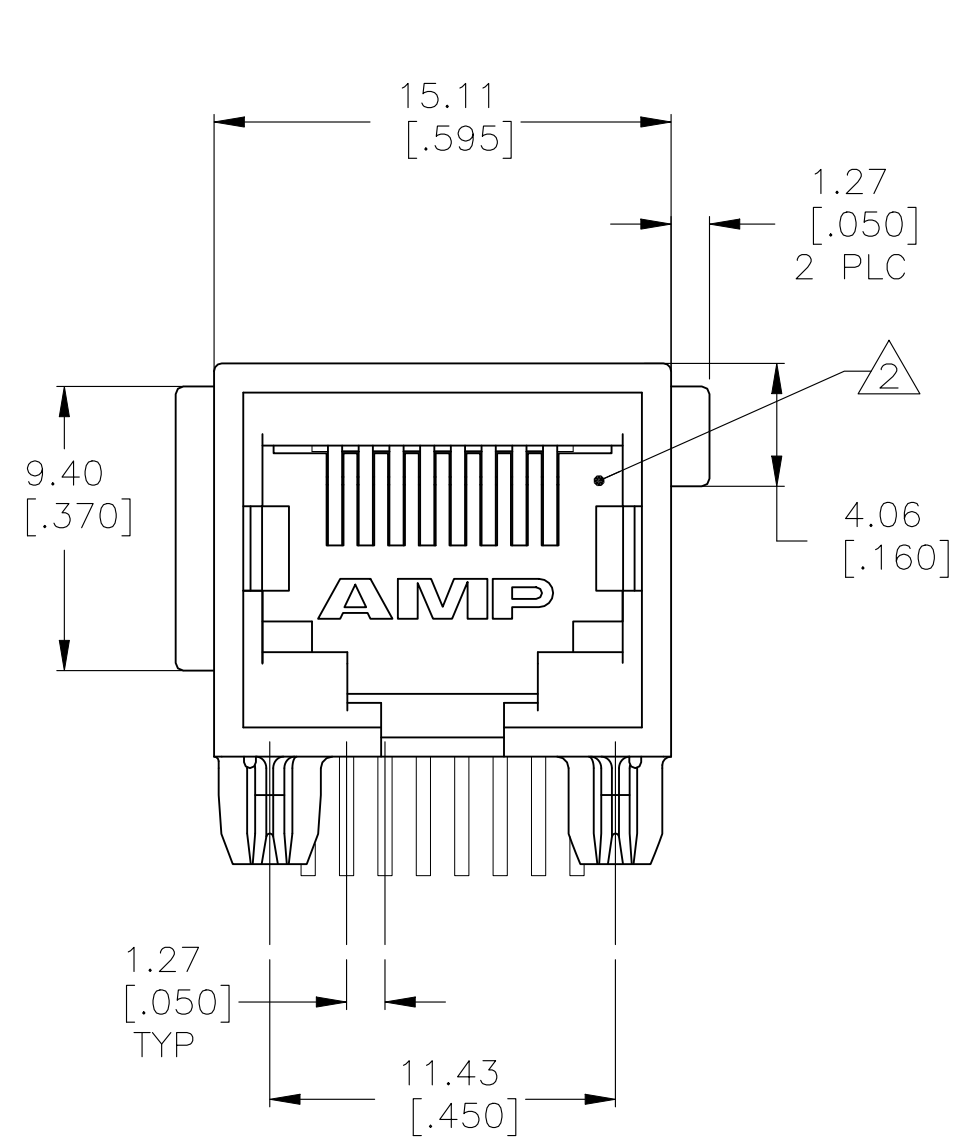



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B3		ECR-19-014657	13DEC2020	RR	SZ

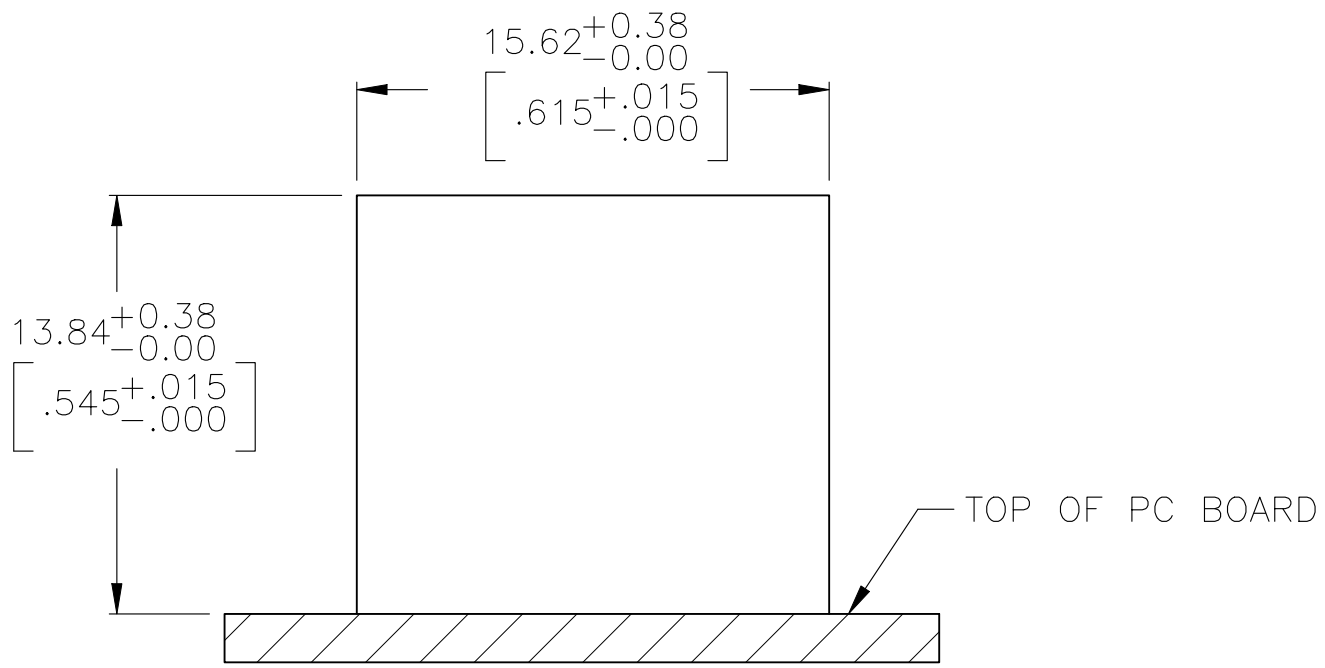

- ⚠ MATERIAL: HOUSING-HIGH TEMPERATURE NYLON, BLACK, UL 94V-0.
TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27µm[.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm [.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27µm[.000050] MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- ⚠ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF TRADITIONAL JACKS.
- ⚠ USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

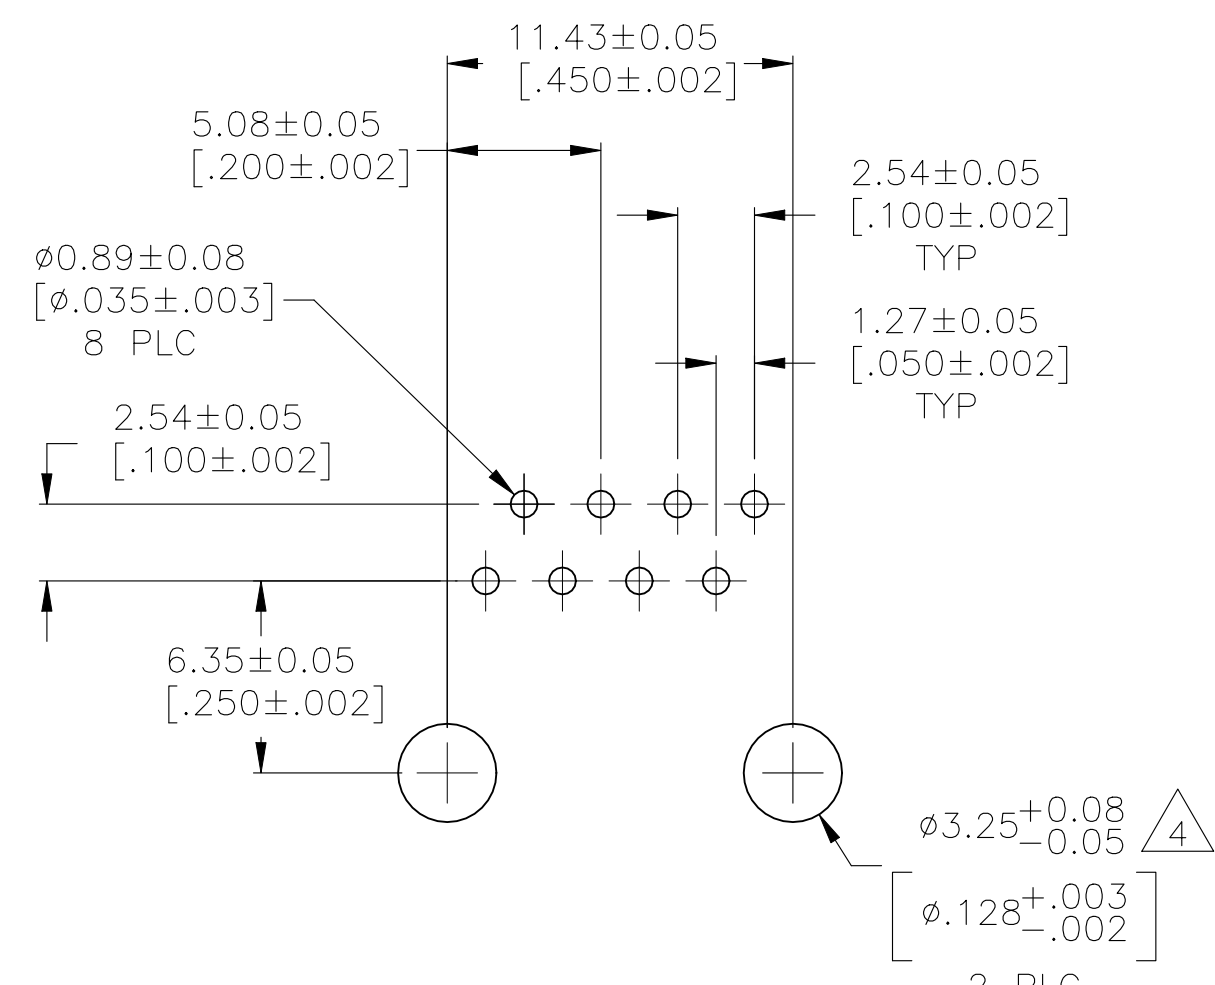

SUGGESTED PANEL CUTOUT SCALE 2:1

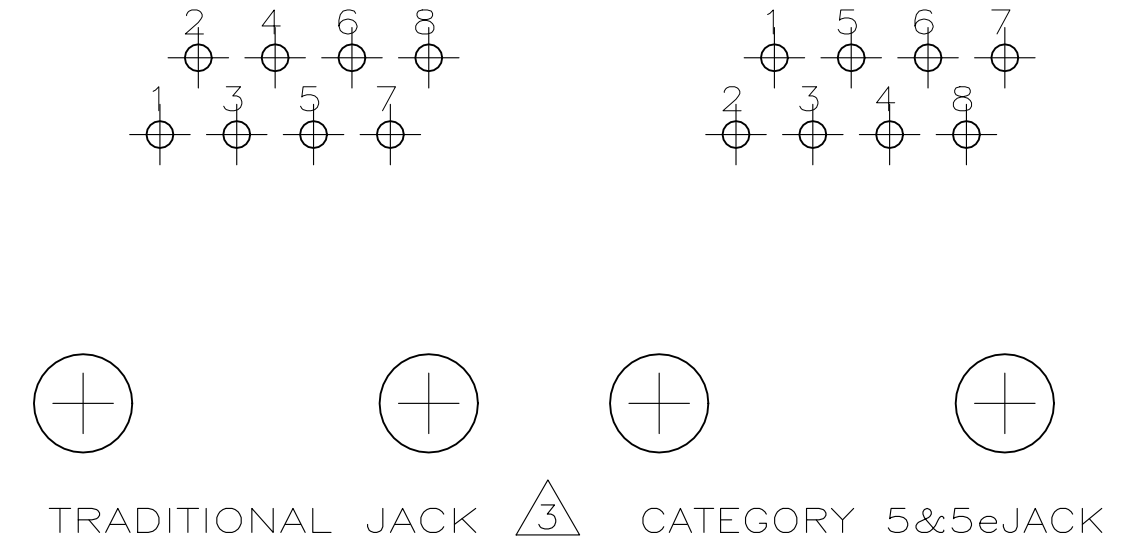

SUGGESTED PC BOARD LAYOUT COMPONENT SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA 20SEPT05	5558343-1 PART NO.		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK J. WESTMAN 20SEPT05	TE Connectivity		
0 PLC ± -	1 PLC ± -	APVD S. FLICKINGER 20SEPT05	MODULAR JACK ASY, 8 POSITION, R/A, LOW PROFILE, CATEGORY 5e, W/PANEL STOPS		
2 PLC ± 0.25[.010]	3 PLC ± -	PRODUCT SPEC 108-1163	SIZE A2	CAGE CODE 00779	DRAWING NO. C=5558343
4 PLC ± -	ANGLES ± -	APPLICATION SPEC 114-2048	RESTRICTED TO		
MATERIAL SEE NOTE 1	FINISH SEE NOTE 1	WEIGHT 0.000000	SCALE 4:1	SHEET 1 OF 1	REV B3
CUSTOMER DRAWING					