

MODEL:

# PDU3VSR6H50A

## 3-Phase Switched Rackmount PDU



**208V  
3-Phase  
Input**



**Hubbell  
CS8365C  
Plug**



**208V Single-  
Phase  
Output**




**18 Outlets**



**14.4kW Load  
Capacity**



**Multimode  
Load Meter**



**Network  
Interface**




**0U  
Rackmount**




**Toolless  
Mounting  
Buttons**






- A** Multimode Load Meter
- B** C13 and C19 Outlets with Multi-Function LEDs
- C** 20A, 2-Pole Hydraulic Magnetic Circuit Breakers
- D** C13 and C19 Plug-Lock Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6 ft. Input Power Cord
- H** Hubbell CS8365C Twist-Lock Input Plug
- I** Durable Metal Case
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button



AC Input Connection: Insert Hubbell CS8365C twist-lock plug into compatible Hubbell CS8364C or CS8369 utility, generator or UPS outlet.

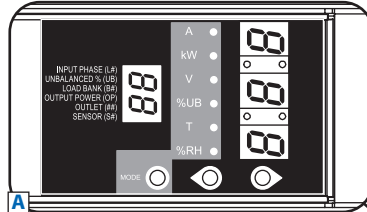

Multimode Load Meter: Display the load for any phase, bank or outlet, display temperature or humidity\*, display the IP address or rotate the display 180°.

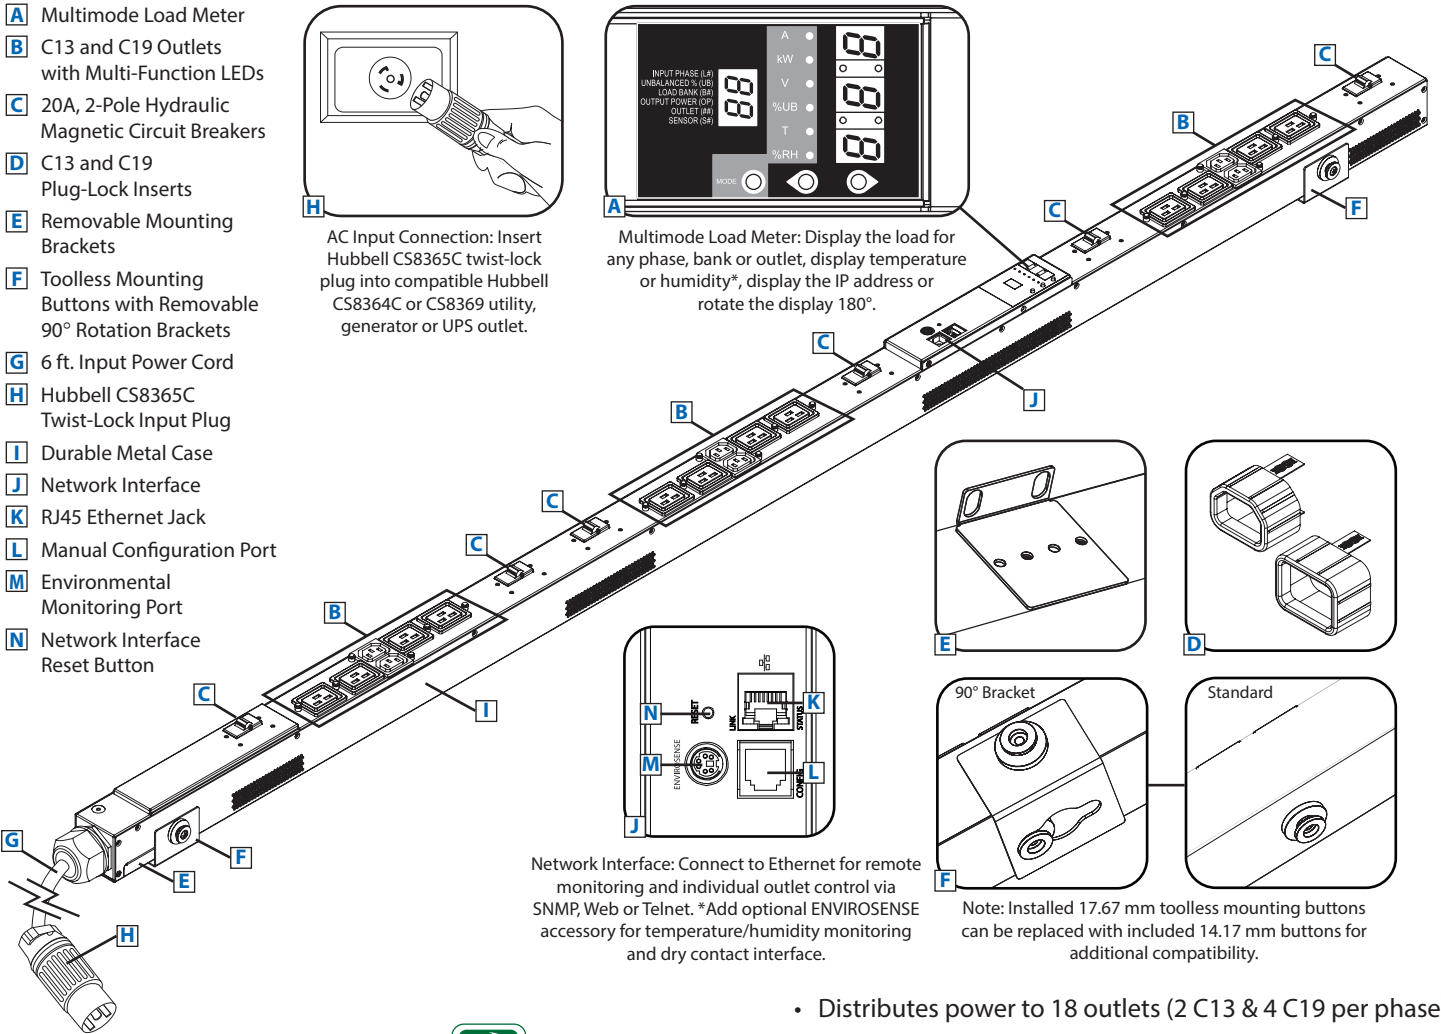

Network Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web or Telnet. \*Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

- Distributes power to 18 outlets (2 C13 & 4 C19 per phase)
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for *any bank, outlet, or phase* in real time
- Perfect for rackmount server, network and telecom applications

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**









1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

### Specifications

<b>Models</b>	PDU3VSR6H50A
<b>Voltage</b>	208V (3-Phase Input/Single-Phase Output)
<b>Frequency</b>	60Hz
<b>Load Capacity</b>	14.4kW
<b>Input Plug</b>	Hubbell CS8365C (50A, 3-Pole, 4-Wire)
<b>Input Cord Length</b>	6 ft.
<b>Outlets</b>	18 (6 C13 /12 C19)
<b>Primary Mounting Option</b>	0U (Vertical) Rackmount
<b>Unit Weight &amp; Dimensions</b>	20.6 lbs /70 x 2.17 x 2.49 in. <i>See next page for detailed unit measurements.</i>
<b>Standards</b>	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.



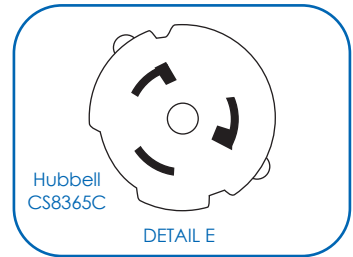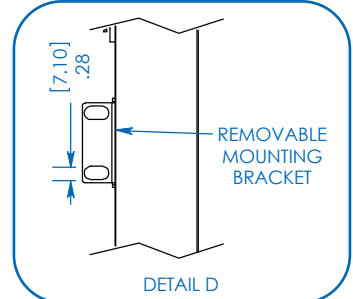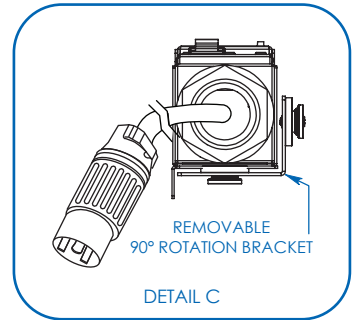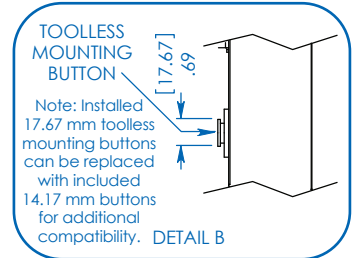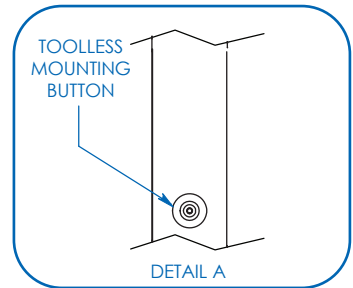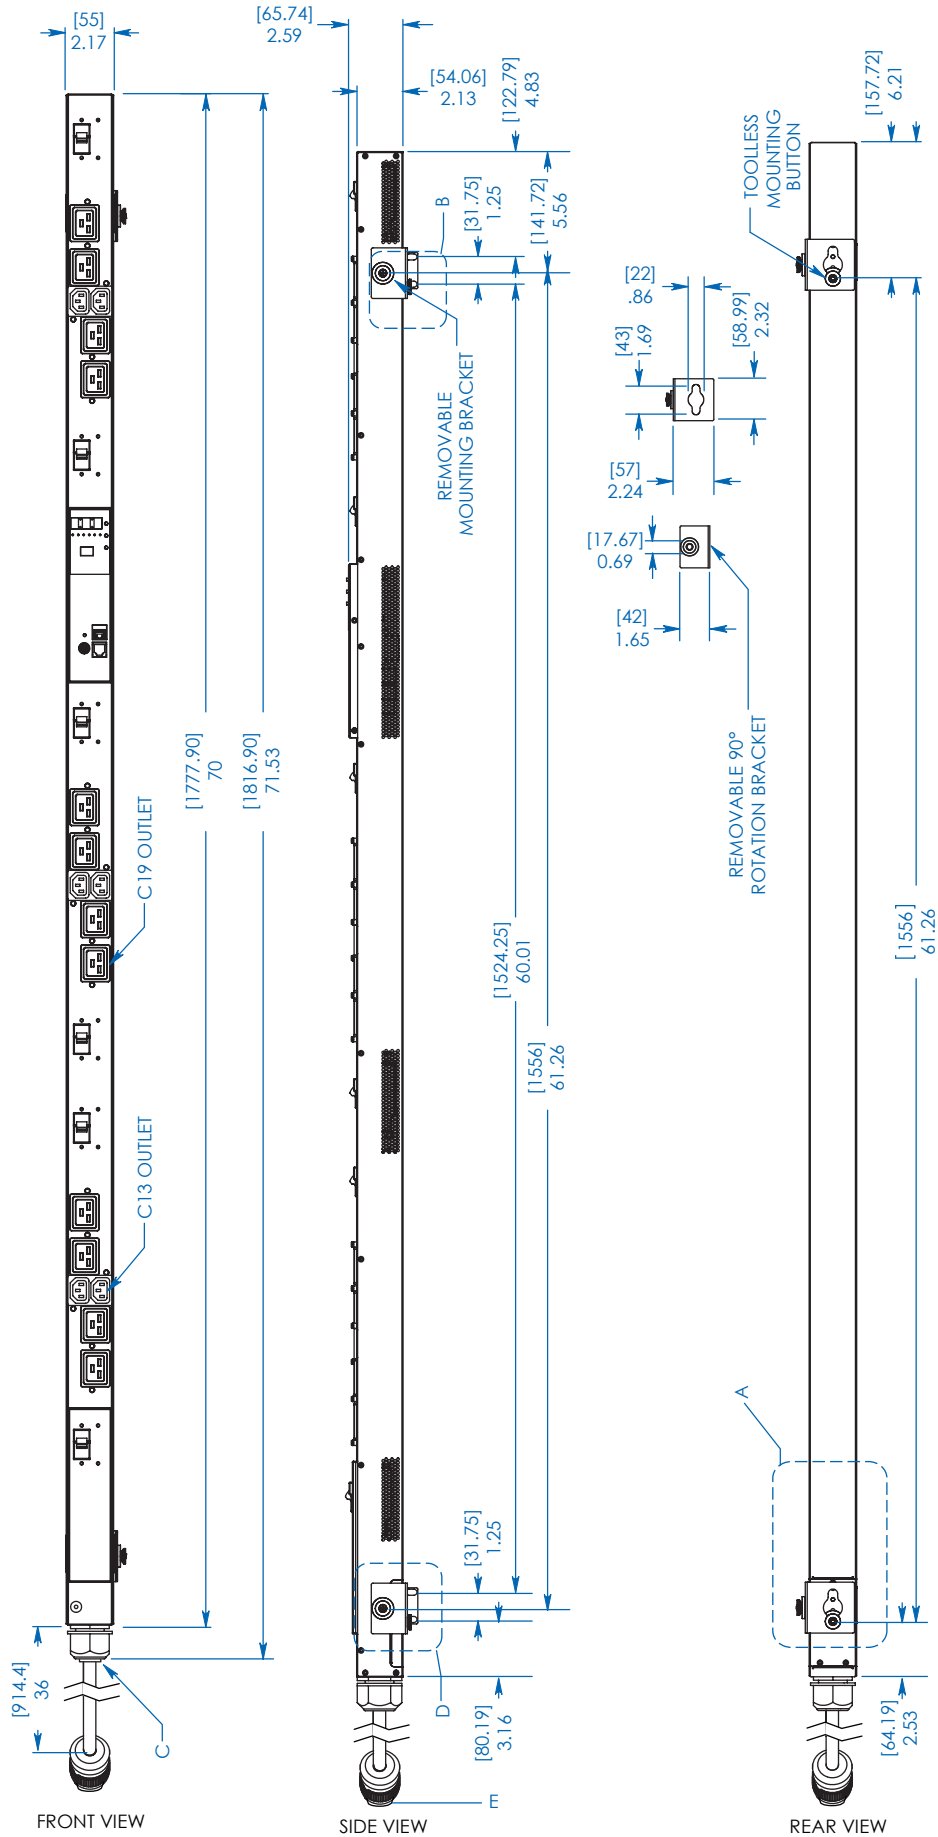

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDU3VSR6H50A**

**TRIPP-LITE**

1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234

[www.tripplite.com](http://www.tripplite.com)