

SUMMARY

Wires

Low	3
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	2T
Termination type	Male solder
IP rating	68
Cable Ø	5.10 - 5.50 mm
Matching parts	EGG.2T.303.CLL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C55: 5.1 - 5.5 mm
Variant	

Performance

Configuration	
Insulator	
Rated Current	17 Amps

Specifications

Contact Type:	Solder
Vtest:	1850 V (DC)1300 V (AC)


Others

Temp (min / max): -55° C / +200° C

Humidity (max): <=95% [at 60 deg C /140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Salt Spray Corrosion: >144 hr
 Climatical Category: 50/175/21
 Shielding (min): 75 dB (10 MHz)
 Shielding (min): 40 dB (1 GHz)
 IP Rating: 68

DRAWINGS

Draws

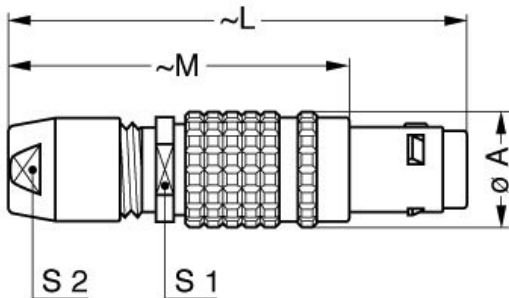

Dimensions

	A	L	M
mm.	15	55	43
in.	0,59	2,17	1,69

RECOMMENDED BY LEMO


Tools

None

Cables

CMN.03.T18.055PGCE	PVC	GREY	
CMN.03.T18.055PGZE		Grey	
CMN.03.T18.055PNCE	PVC	Black	
CMN.03.T18.055PNZE			

Property of LEMO SA. All rights reserved
This document is not contractual

CMN.03.T18.055QGZE	TPR (medical)	Grey	
030 200	PVC	Black	