


Ŧ	D D	П	m	0

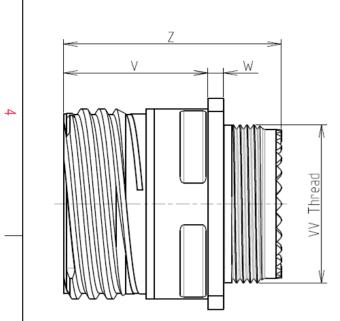

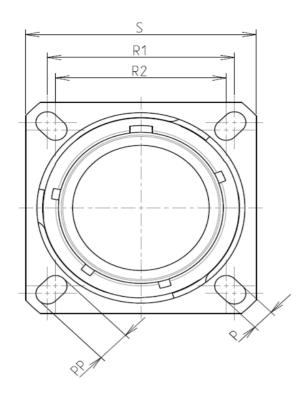



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
2	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 63.16 g ± 10%			

8D 0

G

17

-

S

08

А

F

Ν


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-08



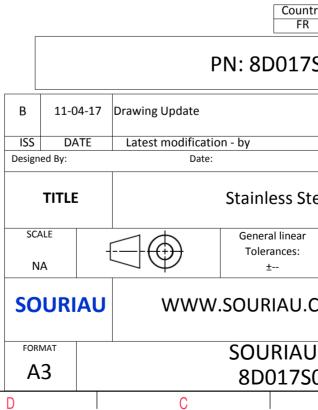

	ω		A		_
A					4
AS EXA	AMPLE				3
whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par			
untry FR	Jurisd	iction & Con Not Listed	trol List		2
750	508AN				
		CUCTON		MOD N°	
Stee	customer drawing teel Receptacle 8D series				
ar	NPRDS / PROJECT				
			59	north of	1
J.CC	J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
508	BAN-C			1/2	J
	В	 	А		

		۵	г	m		0	
		Contact Layout					Panel Cuto
4	-x (	$ \begin{array}{c}                                     $			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta position A B C C D	Contacts (insert arrangement 17-8)           ct 1DD         Location X-axis (mm)         Y-axis (mm)           +.000 (0.00)         +.236 (5.99)           +.128 (3.25)         +.086 (2.18)           +.230 (5.84)        078 (1.98)           +.094 (2.39)        216 (5.49)			J	Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front mod
ω	size no. cor	094 (2.39)        216 (5.49)          230 (5.84)        078 (1.98)          128 (3.25)         +.086 (2.18)           +.000 (0.00)        052 (1.32)           nber of tracts         Size contacts         Service contact location           8         16         II         All				Dim ØA ØAA R1 ØT	A
						SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products wh by either o
N						PN: 8	Countr FR 3D017
_					B 11-04-1 ISS DATE Designed By:	.7 Drawing Update Latest modification - by Date:	
-					TITLE SCALE NA	Gene	eral linear lerances:
					SOURIA		
					A3	80	URIAU
	Н	G	F	E	D	C	

