

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes


	From	To
Wire Sizes	4/0 AWG	2/0 AWG
Wire Types	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Lengths	1-1/16 in.	1-7/16 in.
Panduit Color Code on Barrels	PURPLE	BLACK
Panduit Die Index No. on Barrels	P54	P45
Alternate Industry Die Index No. ( ) on Barrels	(15)	(13)



CERTIFIED



LISTED Wire Connector

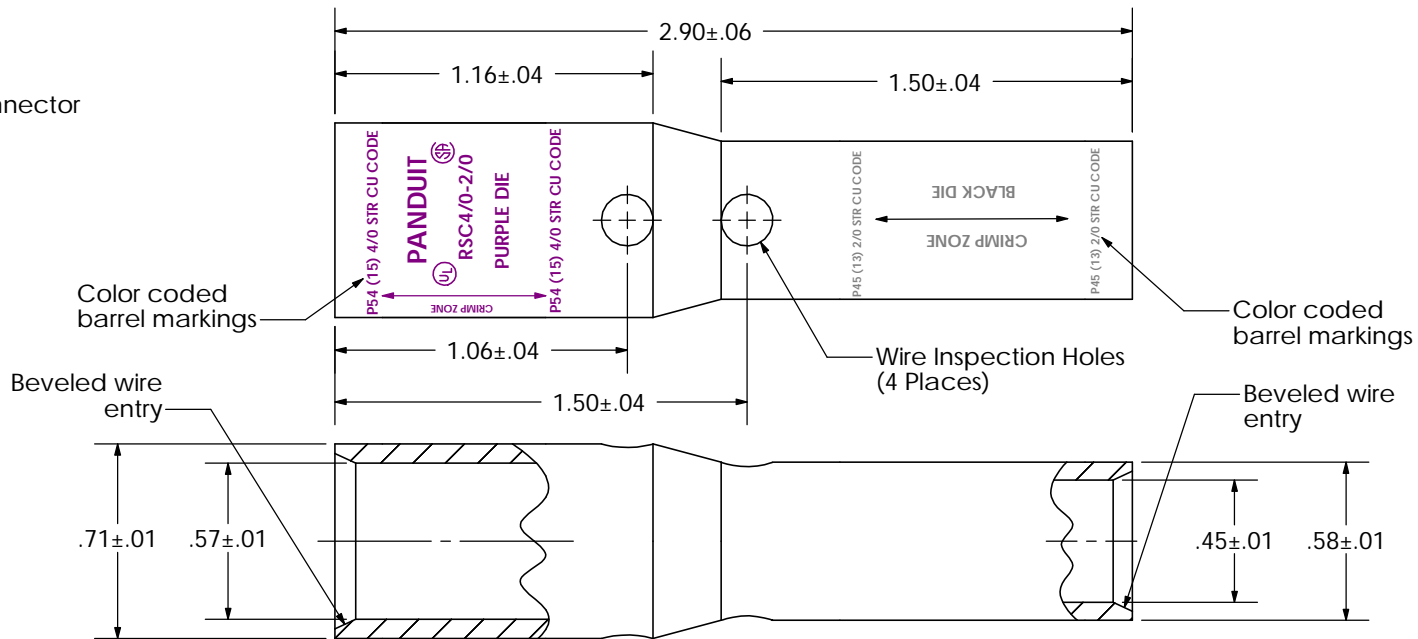

01	2/04	JHNU	CSH	Removed dimension; added note.	11572
REV	DATE	BY	CHK	DESCRIPTION	ECN

**PANDUIT CORP.** TINLEY PARK, ILLINOIS

RSC4/0-2/0-X  
Copper Reducing Splice With Inspection Holes

SCALE N/A DRAWING NO / CAD FILE RSC4\_0-2\_0-CUST