

SUMMARY

Wires

Low voltage 8



Image is for illustrative purpose only

Series SP
Termination type Male solder
IP rating 50
AWG wire size 30.00 - 22.00
Cable Ø 4.00 - 5.20 mm
Status active
Matching parts [SKN.M08.GLLG](#)

Download

[Request a quote](#)
[Eplan](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model SA/Z*: Straight plug, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief
Keying 3 keys (alpha=0, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material Proprietary sulfone, gray
Variant GZ : Gray collet nut for bend relief
Weight 47.30 g

Performance

Configuration SP.M08 : 8 Low V.
Insulator L: PEEK (UL 94 / V-0/1.5)
Rated Current 5.0 Amps

Specifications

Contact Type: Solder
Contact Dia.: 0.9 mm (0.0354in)
Bucket Dia.: 0.8 mm (0.032in)
Max. Solid Conductor: 0.36 mm² (AWG 23)
Max. Stranded Conductor: 0.36 mm² (AWG 22)
R (max): 8.5 mOhm


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms) Contact-contact: 1.50
Air clearance min.: 0.78 mm
Creepage distance min.: 0.78 mm

Others

Endurance (Shell): >2000 mating cycles
Temp (min / max): -50°C / +170°C

DRAWINGS

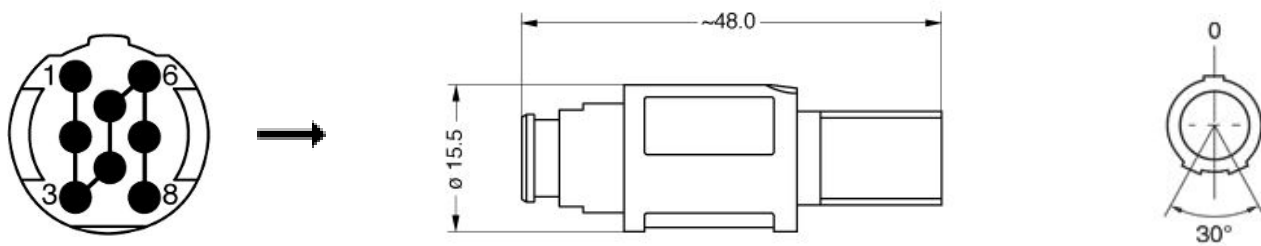

Dimensions

	A	L
mm.	15.5	48
in.	0,61	1,89

RECOMMENDED BY LEMO

Tools

Crimp Tool: [DPC.91.701.V](#)

Cables

CMN.08.T26.042QGZE	TPR (medical)	Grey	
--------------------	---------------	------	--

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

108240	PTFE	White	
108260	PTFE	White	
8280	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.