

Datasheet

| MODEL NAME | CRI | CCT | SEC CODE |
|-------------------------|-----|----------------|----------------|
| V Series Gen3 V562C Ver | 80 | 30/35/40/5000K | SI-B8x123560WW |
| V Series Gen3 VB22C Ver | 80 | 30/35/40/5000K | SI-B8x243B20WW |
| V Series Gen3 VB22F Ver | 80 | 30/35/40/5000K | SI-B8x463B20WW |
| V Series Gen3 VB24F Ver | 80 | 30/35/40/5000K | SI-B8x923B20WW |

| SAMSUNG | | | | CUSTOMER |
|----------|-----------------|---------|-------|----------|
| DEVELOP. | PRODUCT MANAGER | QA(DQA) | SALES | |
| | | | | |


SAMSUNG ELECTRONICS CO.,LTD.

1 Samsung-ro , Giheung-gu ,
Yongin-si , Gyeonggi-do 17113 , KOREA

SAMSUNG

LED Module

V Series Gen3 Ver.

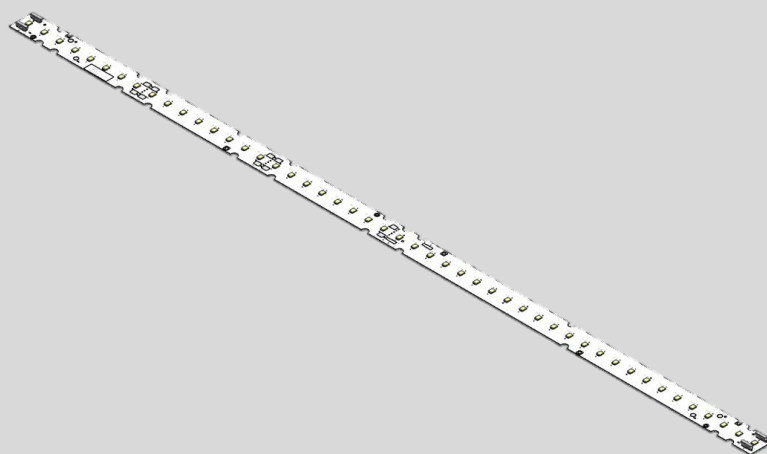

Features & Benefits

- Design flexibility for module length by cuttable design
- 2835 Pro of high degree of reliability & long lifetime
- Four variations of 2200/4400/8000/16000lm
- High efficacy up to 187 lm/W



Application

- Office, Building, Education
- Troffer, Linear, Line
- Highbay/Lowbay for warehouse, plant, high ceiling etc

Table of Contents

| | | | |
|----------|-----------------------------------|-------|----|
| 1. | Product Code Information | ----- | 3 |
| 2. | Characteristics | ----- | 4 |
| 3. | Appearance and Structure | ----- | 9 |
| 4. | Certification and Declaration | ----- | 12 |
| 5. | Label Structure | ----- | 13 |
| 6. | Packing Structure | ----- | 15 |
| 7. | Precautions in Handling & Use | ----- | 16 |
| Appendix | | | |
| 1. | Applicable Solid Wire Information | ----- | 17 |
| 2. | Connection | ----- | 18 |

1. Product Code Information

a) V562C

| Nominal CCT (K) | Product Code |
|-----------------|----------------|
| 3000 | SI-B8V123560WW |
| 3500 | SI-B8U123560WW |
| 4000 | SI-B8T123560WW |
| 5000 | SI-B8R123560WW |

b) VB22C

| Nominal CCT (K) | Product Code |
|-----------------|----------------|
| 3000 | SI-B8V243B20WW |
| 3500 | SI-B8U243B20WW |
| 4000 | SI-B8T243B20WW |
| 5000 | SI-B8R243B20WW |

c) VB22F

| Nominal CCT (K) | Product Code |
|-----------------|----------------|
| 3000 | SI-B8V463B20WW |
| 3500 | SI-B8U463B20WW |
| 4000 | SI-B8T463B20WW |
| 5000 | SI-B8R463B20WW |

d) VB24F

| Nominal CCT (K) | Product Code |
|-----------------|----------------|
| 3000 | SI-B8V923B20WW |
| 3500 | SI-B8U923B20WW |
| 4000 | SI-B8T923B20WW |
| 5000 | SI-B8R923B20WW |

2. Characteristics

a) Basic Information

| Item | Rating | Unit | Remark |
|---|-----------|------------------|---|
| Rated Lifetime | >50,000 | hour | L70B50@ $t_p \leq 80^\circ\text{C}$, Rated current |
| Ingress Protection (IP) | no rating | - | |
| Ambient / Operating Temperature (t_a) | -20 ~ +50 | $^\circ\text{C}$ | V562C, VB22C |
| | -40 ~ +65 | $^\circ\text{C}$ | VB22F, VB24F |
| Storage Temperature | -30 ~ +80 | $^\circ\text{C}$ | V562C, VB22C |
| | -40 ~ +85 | $^\circ\text{C}$ | VB22F, VB24F |
| Isolation Breakdown Voltage | Min. 500 | Vac | |

Notes:

- ※ I_f : Forward current or Operating current
- ※ t_p : temperature at which performance is specified measured at "Tc point".
- ※ t_a : ambient temperature

b) Electro-Optical Characteristics

- V562C

| Item | Nom. CCT (K) | Rating | | | Unit | Remark |
|-----------------------------|-----------------|--------|------|------|------|--|
| | | Min | Typ. | Max | | |
| Luminous Flux | 3000 | 1930 | 2080 | 2280 | lm | $I_f = 530\text{mA}$ $t_p = 50^\circ\text{C}$ |
| | 3500 | 1960 | 2110 | 2320 | | |
| | 4000 | 2020 | 2200 | 2420 | | |
| | 5000 | 2050 | 2200 | 2420 | | |
| Luminous Efficacy | 3000 | 164 | 176 | 193 | lm/W | |
| | 3500 | 166 | 179 | 197 | | |
| | 4000 | 171 | 186 | 205 | | |
| | 5000 | 174 | 186 | 205 | | |
| Color Rendering Index (Ra) | - | 80 | - | - | - | - |
| Operating Current (I_f) | - | 50 | 530 | 1800 | mA | - |
| Operating Voltage (V_f) | - | 20.4 | 22.2 | 23.5 | Vdc | $I_f = 530\text{mA}$ $t_p = 50^\circ\text{C}$ |
| Power Consumption | - | 10.8 | 11.8 | 12.5 | W | |

- VB22C

| Item | Nom. CCT (K) | Rating | | | Unit | Remark |
|-----------------------------|-----------------|--------|------|------|------|--|
| | | Min | Typ. | Max | | |
| Luminous Flux | 3000 | 3870 | 4160 | 4570 | lm | $I_f = 530\text{mA}$ $t_p = 50^\circ\text{C}$ |
| | 3500 | 3930 | 4220 | 4640 | | |
| | 4000 | 4030 | 4400 | 4840 | | |
| | 5000 | 4090 | 4400 | 4840 | | |
| Luminous Efficacy | 3000 | 165 | 177 | 194 | lm/W | |
| | 3500 | 167 | 180 | 197 | | |
| | 4000 | 171 | 187 | 206 | | |
| | 5000 | 174 | 187 | 206 | | |
| Color Rendering Index (Ra) | - | 80 | - | - | - | - |
| Operating Current (I_f) | - | 50 | 530 | 1800 | mA | - |
| Operating Voltage (V_f) | - | 40.8 | 44.4 | 47.0 | Vdc | $I_f = 530\text{mA}$ |
| Power Consumption | - | 21.6 | 23.5 | 24.9 | W | $t_p = 50^\circ\text{C}$ |

- VB22F

| Item | Nom. CCT (K) | Rating | | | Unit | Remark |
|-----------------------------|-----------------|--------|------|------|------|---|
| | | Min | Typ. | Max | | |
| Luminous Flux | 3000 | 7050 | 7570 | 8320 | lm | $I_f = 1010\text{mA}$ $t_p = 65^\circ\text{C}$ |
| | 3500 | 7150 | 7680 | 8440 | | |
| | 4000 | 7340 | 8000 | 8800 | | |
| | 5000 | 7440 | 8000 | 8800 | | |
| Luminous Efficacy | 3000 | 155 | 166 | 183 | lm/W | |
| | 3500 | 157 | 169 | 185 | | |
| | 4000 | 161 | 176 | 193 | | |
| | 5000 | 164 | 176 | 193 | | |
| Color Rendering Index (Ra) | - | 80 | - | - | - | - |
| Operating Current (I_f) | - | 100 | 1010 | 2020 | mA | - |
| Operating Voltage (V_f) | - | 40.8 | 45.0 | 47.8 | Vdc | $I_f = 1010\text{mA}$ |
| Power Consumption | - | 41.2 | 45.5 | 48.3 | W | $t_p = 65^\circ\text{C}$ |

- VB24F

| Item | Nom. CCT | Rating | | | Unit | Remark |
|-----------------------------|----------|--------|-------|-------|------|---|
| | (K) | Min | Typ. | Max | | |
| Luminous Flux | 3000 | 14110 | 15140 | 16650 | lm | $I_f = 2020\text{mA}$ $t_p = 65^\circ\text{C}$ |
| | 3500 | 14300 | 15360 | 16890 | | |
| | 4000 | 14670 | 16000 | 17600 | | |
| | 5000 | 14860 | 16000 | 17600 | | |
| Luminous Efficacy | 3000 | 155 | 167 | 183 | lm/W | |
| | 3500 | 157 | 169 | 186 | | |
| | 4000 | 161 | 176 | 194 | | |
| | 5000 | 163 | 176 | 194 | | |
| Color Rendering Index (Ra) | - | 80 | - | - | - | - |
| Operating Current (I_f) | - | 200 | 2020 | 2020 | mA | - |
| Operating Voltage (V_f) | - | 40.8 | 45.0 | 47.8 | Vdc | $I_f = 2020\text{mA}$ |
| Power Consumption | - | 82.4 | 90.9 | 96.6 | W | $t_p = 65^\circ\text{C}$ |

Notes

- 1) t_p : temperature at which performance is specified; measured at "tc".
- 2) Samsung maintains a measurement tolerance of : Luminous flux: $\pm 7\%$, CRI: ± 3.0 , Voltage: $\pm 0.3\text{ V}$, Power Consumption: $\pm 0.3\text{W}$

c) Color Coordinate

- V562C, VB22C

| Model | Nom. CCT (K) | CIE 1931 Chromaticity Coordinates | | | | Remark | |
|---------------|--------------|-----------------------------------|--------|--------|--------|--------|---|
| V Series Gen3 | 3000 | CIE x | 0.4388 | 0.4461 | 0.4335 | 0.4266 | I _F = 530 mA t _p = 25 °C |
| | | CIE y | 0.3967 | 0.4118 | 0.4072 | 0.3924 | |
| | | Center | CIE x | 0.4363 | CIE y | 0.4020 | |
| | 3500 | CIE x | 0.4132 | 0.4192 | 0.4055 | 0.4001 | |
| | | CIE y | 0.3857 | 0.4009 | 0.3940 | 0.3794 | |
| | | Center | CIE x | 0.4095 | CIE y | 0.3900 | |
| | 4000 | CIE x | 0.3887 | 0.3929 | 0.3803 | 0.3767 | |
| | | CIE y | 0.3755 | 0.3900 | 0.3822 | 0.3683 | |
| | | Center | CIE x | 0.3847 | CIE y | 0.3790 | |
| | 5000 | CIE x | 0.3511 | 0.3524 | 0.3431 | 0.3423 | |
| | | CIE y | 0.3517 | 0.3649 | 0.3569 | 0.3454 | |
| | | Center | CIE x | 0.3472 | CIE y | 0.3547 | |

- VB22F, VB24F


| Model | Nom. CCT (K) | CIE 1931 Chromaticity Coordinates | | | | Remark | |
|--------------|--------------|-----------------------------------|--------|--------|--------|--------|--|
| V Series Gen | 3000 | CIE x | 0.4382 | 0.4455 | 0.4329 | 0.4260 | VB22F I _F = 1010 mA VB24F I _F = 2020 mA t _p = 25 °C |
| | | CIE y | 0.3964 | 0.4115 | 0.4069 | 0.3921 | |
| | | Center | CIE x | 0.4357 | CIE y | 0.4017 | |
| | 3500 | CIE x | 0.4130 | 0.4190 | 0.4053 | 0.3999 | |
| | | CIE y | 0.3855 | 0.4007 | 0.3938 | 0.3792 | |
| | | Center | CIE x | 0.4093 | CIE y | 0.3898 | |
| | 4000 | CIE x | 0.3884 | 0.3926 | 0.3800 | 0.3764 | |
| | | CIE y | 0.3751 | 0.3896 | 0.3818 | 0.3679 | |
| | | Center | CIE x | 0.3844 | CIE y | 0.3786 | |
| | 5000 | CIE x | 0.3509 | 0.3522 | 0.3429 | 0.3421 | |
| | | CIE y | 0.3513 | 0.3645 | 0.3565 | 0.3450 | |
| | | Center | CIE x | 0.3470 | CIE y | 0.3543 | |

Notes

- 1) Samsung maintains a measurement tolerance of CIE_x / CIE_y ± 0.005

d) Light Distribution

| Item | Unit | Nominal | Tolerance | Remark |
|-------------------|-----------|---------|-----------|--------|
| Beam Angle (FWHM) | °(degree) | 118 | ± 5 | |

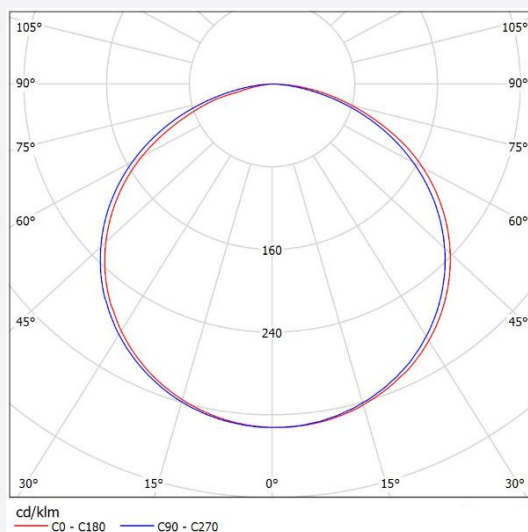

e) Temperature Characteristics

- V562C, VB22C

| Item | Nominal(t_p)* | Life(t_L)** | Max(t_c)*** | Unit |
|-------------|-------------------|-----------------|-----------------|------|
| Temperature | 50 | 80 | 90 | °C |

- VB22F, VB24F


| Item | Nominal(t_p)* | Life(t_L)** | Max(t_c)*** | Unit |
|-------------|-------------------|-----------------|-----------------|------|
| Temperature | 65 | 80 | 90 | °C |

Notes

- * Temperature used to specify performance of the module (t_p).
 - ** Rated maximum performance temperature at which lifetime is specified in L70B50 (t_L).
 - *** Rated maximum temperature, highest permissible temperature to avoid safety risk (t_c).
- All temperatures are measured at the designated "tc" as indicated on the module. (See page 6)
Please use heat-sink(or heat dissipation solution) with proper thermal capacity(operating wattage).

f) Thermal Measurement


Performance temperatures are measured on "Tc point" as indicated on the module.

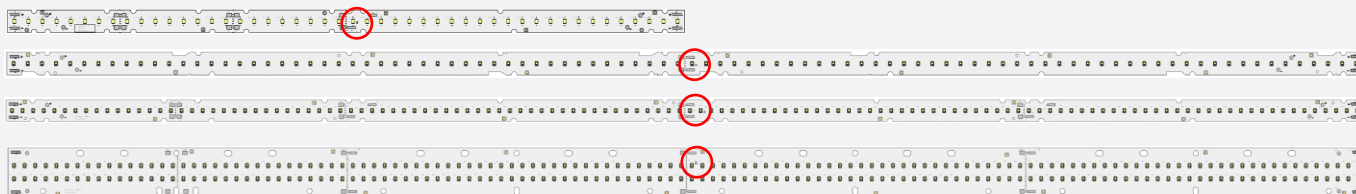

3. Structure and Assembly


a) Appearance & Dimension

- V562C

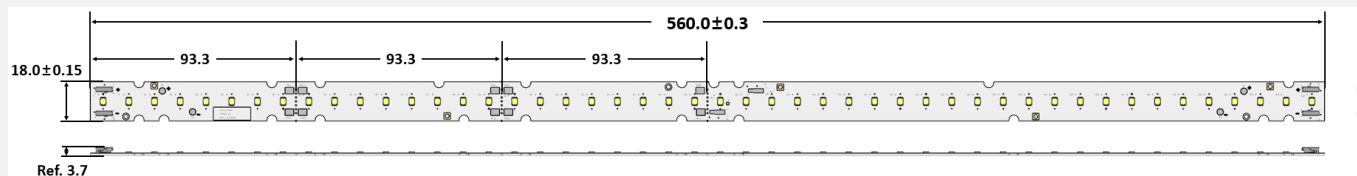


| Dimension | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 560.0 | ±0.3 | mm |
| Module Width | 18.0 | ±0.15 | mm |
| Module Height | 3.7 | ±0.2 | mm |
| PCB Thickness | 1.0 | ±0.1 | mm |
| Module Weight | 21.0 | ±1.1 | g |

- VB22C

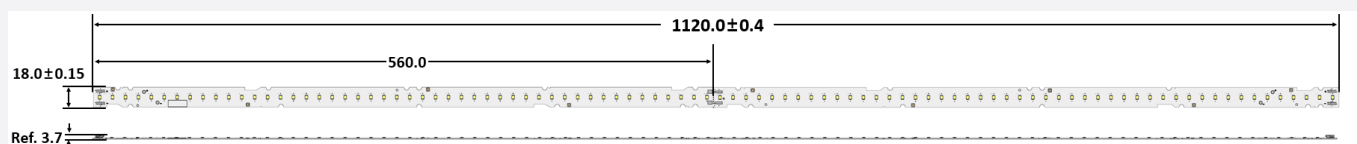


| Dimension | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 1120.0 | ±0.4 | mm |
| Module Width | 18.0 | ±0.15 | mm |
| Module Height | 3.7 | ±0.2 | mm |
| PCB Thickness | 1.0 | ±0.1 | mm |
| Module Weight | 42.0 | ±2.1 | g |

- VB22F

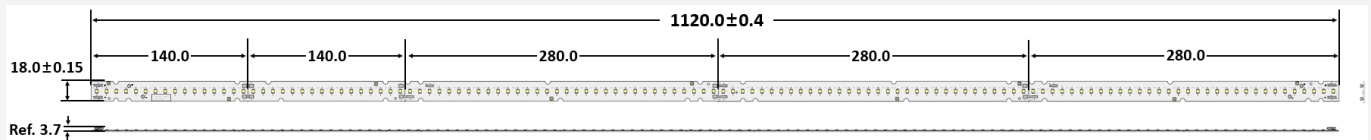

| Dimension | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 1120.0 | ±0.4 | mm |
| Module Width | 18.0 | ±0.15 | mm |
| Module Height | 3.7 | ±0.2 | mm |
| PCB Thickness | 1.0 | ±0.1 | mm |
| Module Weight | 42.0 | ±2.1 | g |

- VB24F

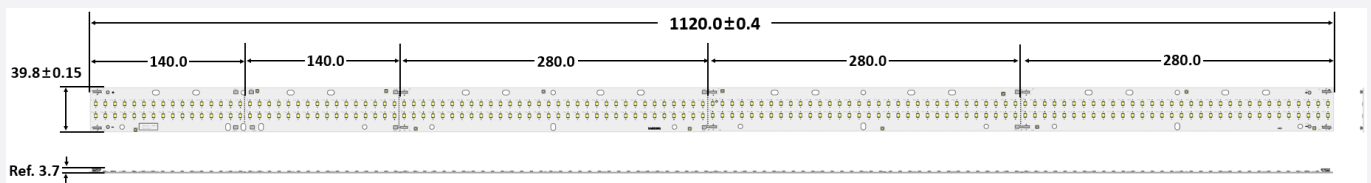

| Dimension | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 1120.0 | ±0.4 | mm |
| Module Width | 39.8 | ±0.15 | mm |
| Module Height | 3.7 | ±0.2 | mm |
| PCB Thickness | 1.0 | ±0.1 | mm |
| Module Weight | 91.0 | ±4.6 | g |

b) Structure

| Item | Specification |
|-----------|------------------------------|
| LED | LM281B+ Pro Middle Power LED |
| PCB | CEM-3 PCB |
| Connector | 1pin poke-in type |

c) Schematic Circuit

- V562C 8S x 6P
- VB22C 16S x 6P
- VB22F 16S x 8P
- VB24F 16S x 16P

d) Handling Guide


- * Please use antistatic gloves or other ESD protection methods when handling this cuttable board to prevent ESD damage or contamination of LEDs.
- * Customers should use proper tools and not use hands when they separate this cuttable board. It is not allowed to bend PCB and touch LED.
- * Please be thoughtful of securing withstanding voltage spec in case of cutting this board.
- * If customers don't follow above guideline regarding handling, we won't be responsible for any quality issue.
- * It is necessary to use after insulation work when exposed to insulating layer on PCB section.

4. Certification and Declaration

| Item | Compliant to | Remark |
|---------------|--------------|--|
| Certification | UL/cUL | E344519 Input Types(Input supply limitations) : Class 2 |
| Declaration | RoHS | Hazardous Substance & Material |

5. Label Structure

a) Module Label

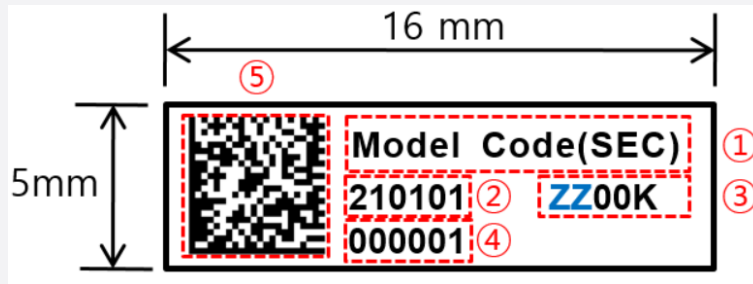


| Number | Item | Remark |
|--------|---------------------|--|
| ① | Model code | Refer to page 3 |
| ② | Date of manufacture | YYMMDD |
| ③ | Color temperature | ZZ = 30, 35, 40, 50 |
| ④ | Series number | 000001~999999; Setting "000001" every working day |
| ⑤ | QR code | V562C : SI-B8X123560WW YYMMDD ZZ00K 000001 VB22C : SI-B8X243B20WW YYMMDD ZZ00K 000001 VB22F : SI-B8X463B20WW YYMMDD ZZ00K 000001 VB24F : SI-B8X923B20WW YYMMDD ZZ00K 000001 |

b) Tray & MBB Bag Label



| Number | Item | Remark |
|--------|--------------------|------------------|
| ① | Model Code | Refer to page 3 |
| ② | LOT ID | |
| ③ | Quantity | Refer to page 15 |
| ④ | Date of production | |
| ⑤ | Date of Issue | |
| ⑥ | Place of origin | |

c) Box Label

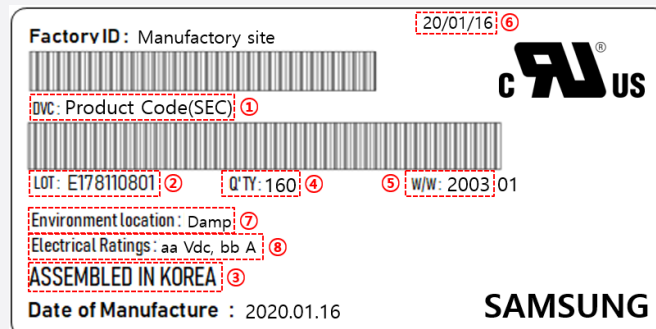

| Number | Item | Remark |
|--------|--------------------------------------|--|
| ① | Product Code | Refer to page 3 |
| ② | LOT ID | |
| ③ | Place of origin | |
| ④ | Quantity | Refer to page 15 |
| ⑤ | Describe production week | |
| ⑥ | Date of Issue | |
| ⑦ | Environment location | Damp |
| ⑧ | Electrical Ratings (voltage/current) | V562C 28Vdc, 1.8A VB22C 55Vdc, 1.8A VB22F 49Vdc, 2.02A VB24F 49Vdc, 2.02A |

6. Packing Structure

| Product | Packing | Quantity (modules) | Dimension (mm) | | |
|-------------|-----------|--------------------|----------------|-------|--------|
| | | | Length | Width | Height |
| V562C | Tray | 40 ea | 600 | 444 | 25 |
| | Outer Box | 280 ea | 605 | 449 | 155 |
| | Pallet | 5600 ea | 1100 | 1100 | 130 |
| VB22C/VB22F | Tray | 11 ea | 1180 | 310 | 22 |
| | Outer Box | 110 ea | 1185 | 315 | 163 |
| | Pallet | 1650 ea | 1200 | 1000 | 130 |
| VB24F | Tray | 6 ea | 1180 | 310 | 22 |
| | Outer Box | 60 ea | 1185 | 315 | 163 |
| | Pallet | 900 ea | 1200 | 1000 | 130 |

7. Precautions in Handling & Use

- 1) This LED Module should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA is recommended to use. When using other solvents it should be confirmed beforehand whether the solvents may react with the Module material. The banned Freon solvents should not be used. Do not clean using ultrasonic cleaner.
- 2) The LEDs are sensitive to the static electricity and surge. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED Modules. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices. Damaged LEDs may show some unusual characteristics such as increase in leak current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.
- 3) VOCs (Volatile Organic Compounds) can be generated from adhesives, flux, hardener or organic additives used in luminaires (fixtures). Transparent LED silicone encapsulant is permeable to those chemicals and they may lead a discoloration of encapsulant when they exposed to heat or light. This phenomenon can cause a significant loss of light emitted (output) from the luminaires (fixtures). In order to prevent these problems, we recommend users to know the physical properties of the materials used in luminaires, and they must be selected carefully.
- 4) Risk of sulfurization (or tarnishing)
The LED uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, the LED Modules should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.
- 5) The resin area is very sensitive, please do not handle, press, touch or rub it.
- 6) Do not drop the Module or give shocks.
- 7) Do not store the Module in a dusty place or humid location.
- 8) Do not disassemble the Module.
- 9) Do not directly look into the lighted LED with naked eyes for a long period of time.
- 10) Please consider the creepage and clearance distance at the end product.
- 11) Solder ball
There might be solder ball and/or residue on the surface of module as long as they do NOT affect performance and safety.
- 12) When you install products in fixture, you should not connect the product while it is powered on. It will cause damage Circuits(that LED is included) and result in emitting smoke and ignition.

[Appendix]

1. Applicable Solid Wire Information

a) Strip details

| | |
|----------------------------------|-------------------------------------|
| Connection method | Push In |
| Solid Conductor | 0.2-0.75mm ² / 24-18 AWG |
| Strip length | 8.5±1mm |
| Conductor entry angle to the PCB | 0 ° |

b) Important processing notes

Depending on the SMD soldering process and associated parameters a minor discoloration might occur. However, this will not influence the functionality.

2. Connection

| Product | Max parallel | Max series | Remark |
|---------|--------------|------------|------------------------------------|
| V562C | 1 | 4 | Operating current / module = 1.8A |
| VB22C | 1 | 4 | Operating current / module = 1.8A |
| VB22F | 1 | 4 | Operating current / module = 2.02A |
| VB24F | 1 | 4 | Operating current / module = 2.02A |

※ The type of screw to be used is not considered.

Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and memory, system LSI, foundry and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Copyright © 2021 Samsung Electronics Co., Ltd. All rights reserved.
Samsung Electronics reserves the right to modify, at its sole discretion, the design, packaging, specifications, and features shown herein without notice at any time.

Samsung Electronics Co., Ltd.
1, Samsung-ro, Giheung-gu,
Yongin-si, Gyeonggi-do, 17113
KOREA
www.samsung.com/led

SAMSUNG