

—				
—	ری ری		 0	0
	•	·	•	•



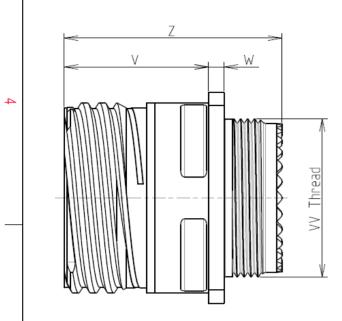

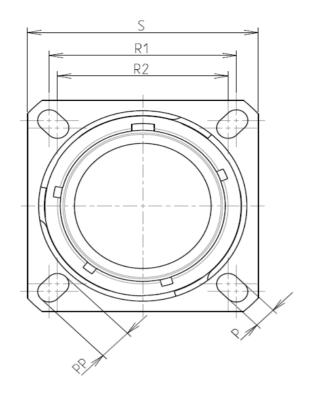

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minin
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C


: 500 hours

G

F

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	23.01				
R2	20.62				
S	28.6±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M18x1-6g				

Е

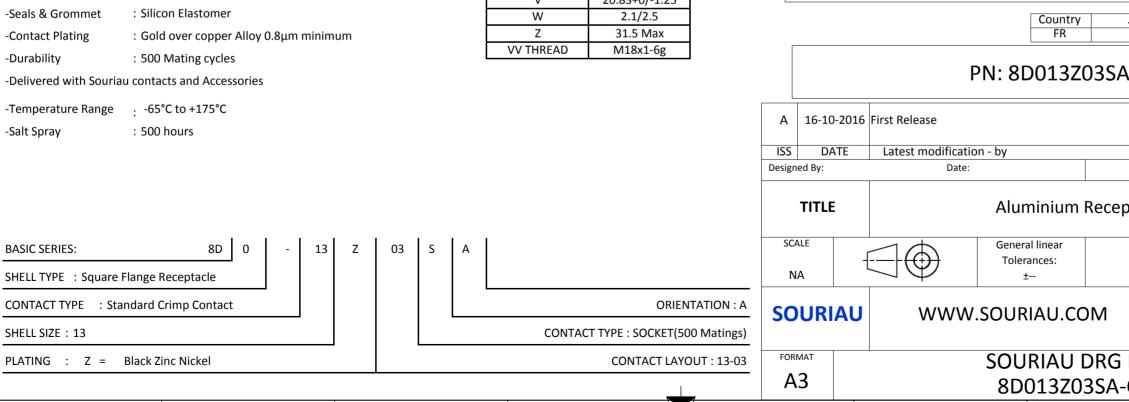

D

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) 3 Image: Source of the Direct of th								
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)								
due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)								
due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)								
First Release Latest modification - by MOD N°								
Latest modification - by MOD N° Date: CUSTOMER DRAWING Aluminium Receptacle 8D series								
General linear Tolerances: ± This document is the property of SOURDALL								
SOURIAU SOURIAU it must not be reproduced or communicated without permission								
SOURIAU DRG N°SHEET8D013Z03SA-C1/2								

Contact Layout	Pa		
		anel Cuto	
SQUARE FLANGE REAL 3#16	RECEPTACLE (TYPE 0) MOUNTING		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	ØA Dim	<u>ðT_</u>	
	ØA ØAA R1 ØT		
d	SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda		
		Count FR	
	PN: 8	D013	
A 16-10-2016 First Rele	ase		
ISS DATE Latest Designed By:	modification - by Date:		
TITLE	Alu	miniu	
SCALE	D) Tole	ral linear trances: ±	
SOURIAU	WWW.SOUF	RIAU.(
FORMAT A3	SOL 8D	JRIAU 013Z	
H G F E D	C		

