

Combo Antennas

molex

Combo antennas offer a combination of long-range connectivity, high power efficiency and easy integration advantages for IoT, GPS and M2M applications


Features and Benefits

Feeding pad for GNSS band

Feeds electrical signals from the transmission line on the PCB to the antenna for Wi-Fi band irradiation

Feeding pad for the 2.4/5GHz (Wi-Fi) band

Feeds electrical signals from the transmission line on the PCB to the antenna for Wi-Fi band irradiation

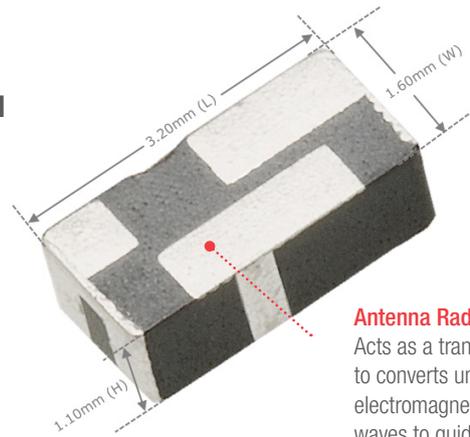

Antenna Radiator

Acts as a transducer to converts unguided electromagnetic waves to guided electromagnetic waves and vice versa

Fixing pad

Firmly anchor antenna housing onto the SMT pad of the PCB

Ceramic Antenna Housing

Compact, inexpensive and easy to integrate into applications subject to high reflow temperatures

Feeding pad

Connects to the radio transceiver via a 50-Ohm transmission line on the PCB. Electrical signals from the transmission line are fed through this pad on the PCB

Grounding pad

Provides electrical grounding of antenna onto the application PCB

Antenna Radiator


Acts as a transducer to converts unguided electromagnetic waves to guided electromagnetic waves and vice versa

Grounding pad

Provides electrical grounding of antenna onto the application PCB

Pick-and-Place Feature

Facilitates automatic placement during assembly

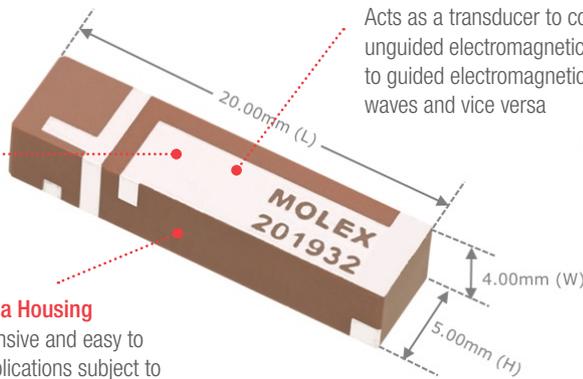

Ceramic Antenna Housing

Compact, inexpensive and easy to integrate into applications subject to high reflow temperatures

Fixing pads

Firmly anchor antenna housing onto the SMT pad of the PCB

Two holes on the sides of the antenna


Facilitates secure screw-nut mounting on application chassis

Balanced Antenna

Offers consistent performance throughout antenna; antenna resonance not affected by cable length

Tape Liner

Facilitates easy peel-and-stick mounting

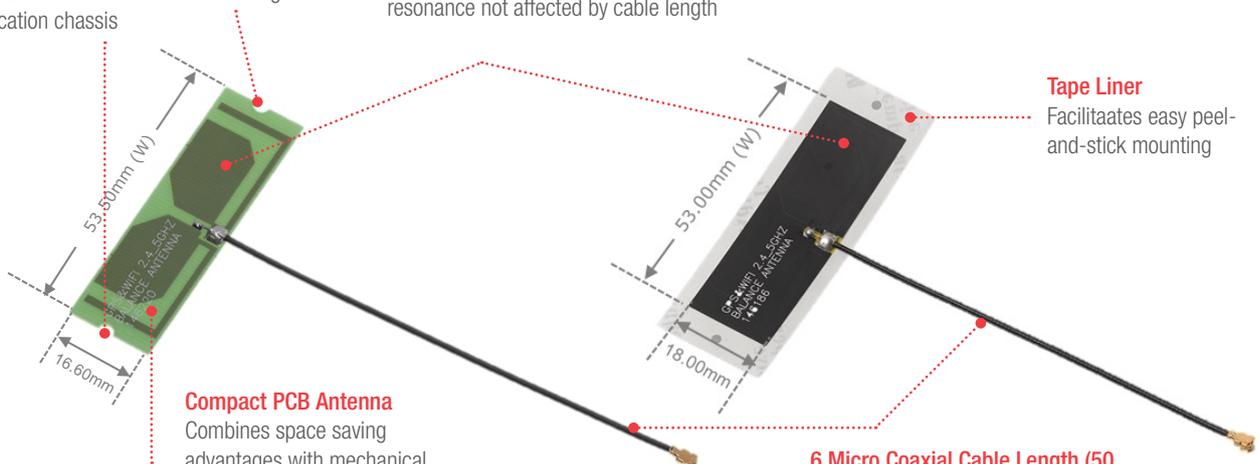

Compact PCB Antenna

Combines space saving advantages with mechanical robustness for rigid mounting

6 Micro Coaxial Cable Length (50, 100, 150, 200, 250, 300mm)

Ensures maximum design flexibility in meeting connectivity needs

Combo Antennas



Applications

Consumer

Smart Homes

IoT

Automotive

Connected Vehicle

Industrial

Smart Cities



Smart Home



Internet of Things (IoT)

Specifications

REFERENCE INFORMATION

Packaging: PET film (146186, 146220)

Tape and Reel (201932, 203007)

Use with: Combo Wireless devices

Designed In: Millimeters

RoHS: Yes

Halogen Free: Yes

Glow Wire Compliant: No

ELECTRICAL

Frequency Range: Refer to Product Specifications

Return Loss: Refer to Product Specifications

Average Total Radiation Efficiency(%): Refer to Product Specifications

Peak Gain (dBi): Refer to Product Specifications

Polarization: Linear

Input Impedance (ohms): 50

MECHANICAL

Refer to Product Specifications for relevant antennas

PHYSICAL

Material: Ceramic (201932, 203007)

PCB (146220)

Flexible Material (146186)

Plating: Silver (Ag) 11±4microns (201932, 203007)

Operating Temperature:

-40 to 125°C (203007, 201932)

-30 to 85°C (146220, 146186)

Ordering Information

Series No.	Substrate	Mounting	Dimensions (mm)
203007	Ceramic	SMT	3.20(L) by 1.60(W) by 1.10(H)
201932	Ceramic	SMT	20.00(L) by 4.00(W) by 5.00(H)
146220	PCB	Screw Nut	53.50 by 16.60
146186	Flexible Material	Peel-and-Stick	53.00 by 18.00

www.molex.com/link/standard_antennas.html

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.