
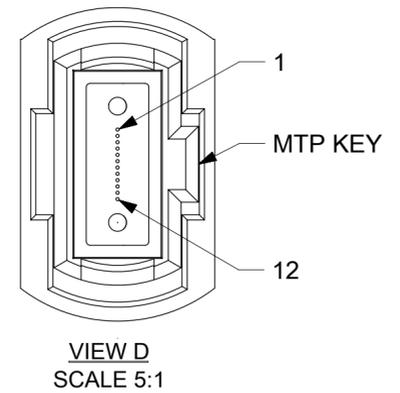

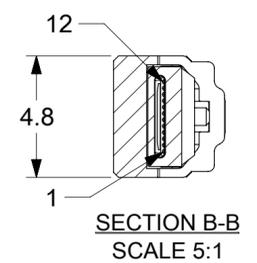
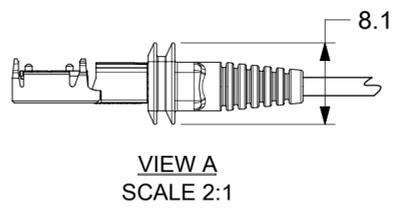


JUMPER P/N	OVERALL LENGTH, L (m)	MTP CONN. TYPE
1062673000	0.3 +0.1/-0	MALE
1062673001		FEMALE
1062673002	1.0 +0.2/-0	MALE
1062673003		FEMALE

CONNECTIONS	
FROM	TO
P1-1 THRU P1-12	P2-12 THRU P2-1

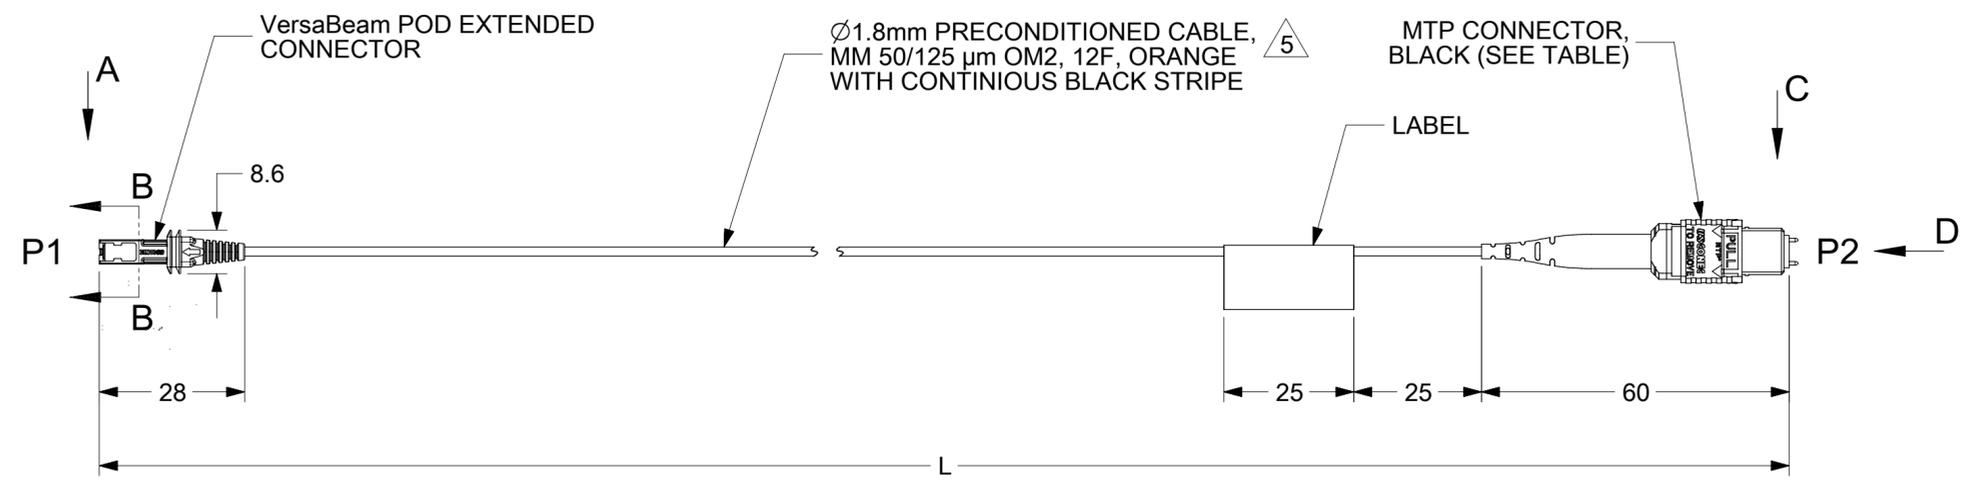

- NOTES:
- DUST CAPS ARE NOT SHOWN BUT INCLUDED. MALE MTP CONNECTOR IS SHOWN. FEMALE CONNECTOR DOES NOT CONTAIN PINS.
 - LABEL IS PRINTED WITH MOLEX NAME, P/N AND SERIAL NUMBER.
 - MAXIMUM INSERTION LOSS @ 850 nm TO AN INTERPOSER: 2.0 dB THROUGHPUT LOSS (MTP + VersaBeam POD): 1.2 dB

TEST DATA IS PROVIDED WITH EACH SHIPMENT.
 - ALL EXPOSED MATERIALS MEET UL94 V-0. CABLE RATING - OFNG-LS (UL1685).
 - TO PREVENT FIBER TWIST DURING INSTALLATION, USE BLACK STRIPE ON THE JACKET AS A REFERENCE OR THE CABLE/FIBER ORIENTATION.
 - THE 1.8mm CABLE JACKET IS FOR FIBER PROTECTION FOR ON-BOARD APPLICATIONS. THE TRANSITION FROM MTP TO 1.8mm CABLE ACTS AS A BEND LIMITER AND DOES NOT PROVIDE MECHANICAL STRAIN RELIEF.

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 641177		
	mm	1:1	DRWN: IGUMIN 2020/01/13		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: GGENCHANOK 2020/07/13		
ANGULAR TOL ± 0.5°		APPR: GGENCHANOK 2020/07/13		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
3 PLACES ±		DRWN: KPEVZNER 2012/02/22		SD-106267-3000	
2 PLACES ±		APPR: IGUMIN 2012/02/23		DOC TYPE DOC PART REVISION	
1 PLACE ±		SERIES		PSD 001 C	
0 PLACES ±		MATERIAL NUMBER		SEE TABLE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SHEET NUMBER	SHEET NUMBER
			C-SIZE	106267	1 OF 1