



PRODUCT DATASHEET

Lena series

last update 31/10/2016

DETAILS

Product Number	CN13172_LENA-WAS-DL
Family	Lena
Type	RefPack
Color	metal
Diameter	111 mm
Height	40,3 mm
Style	round
Optic Material	PC
Holder Material	
Fastening	screw, socket
Status	production ready
ROHS Compliant	Yes
Date Updated	31/10/2016



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
LUXEON CoB 1204/1205	sim: Asymmetric	Asymmetric	sim: 88 %	sim: 1.100	-
LUXEON CoB 1208	sim: Asymmetric	Asymmetric	sim: 87 %	sim: 1.100	-
Mega Zenigata (GW5DGC)	sim: Asymmetric	Asymmetric	-	-	-
Mega Zenigata (GW6DME)	Asymmetric deg	Asymmetric	75 %	0.820	-

D



C

B

A

4



4

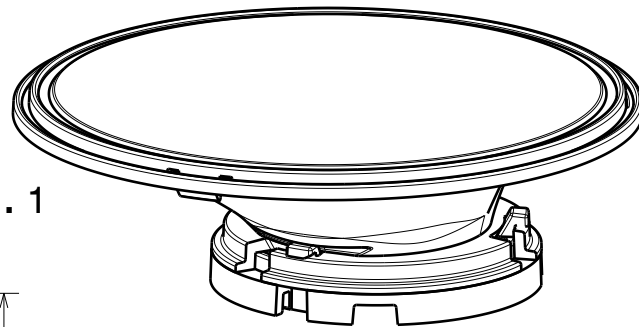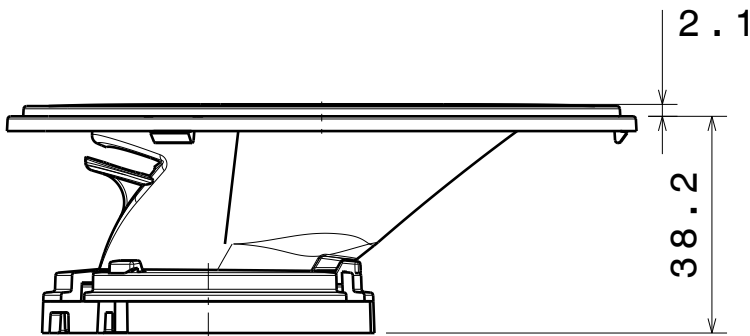

Isometric view

3

3

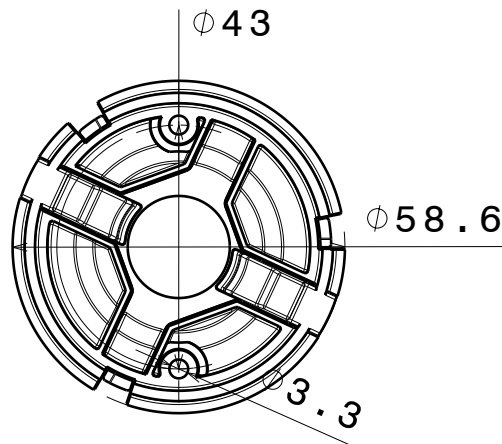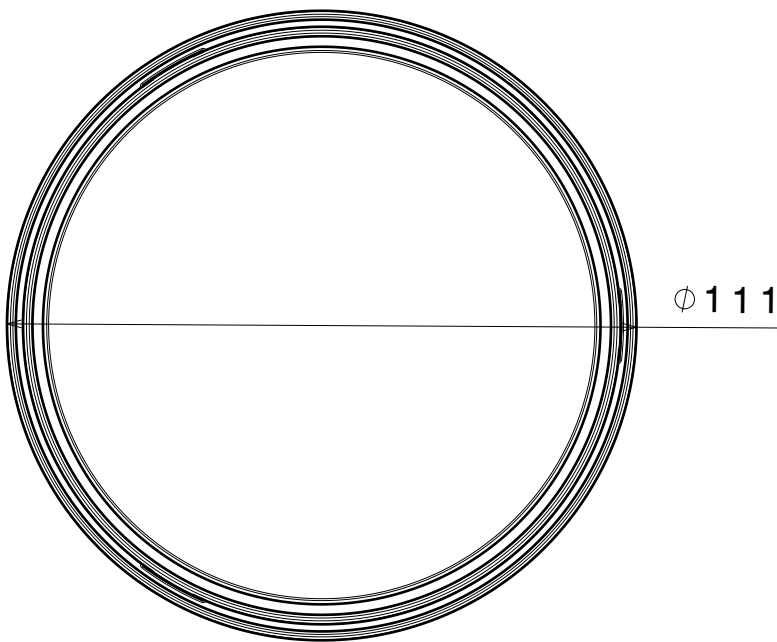

Materials

Reflector: PC
 Base part: PC
 Sublens: PC

Note: Using additional sublens add 2,1mm to total height.

2

2

This drawing is our property.
 It can't be reproduced
 or communicated without
 our written agreement.

LEDiL LediL Oy
 Salorankatu 10
 FIN 24240 SALO
 Finland

DRAWING TITLE Mechanical drawing

DRAWN BY DATE
 as 26.9.2012

LENA-WAS

CHECKED BY DATE
 VS -

SIZE PART NUMBER REV
 A4 001

DESIGNED BY DATE
 - -

SCALE 2:3 WEIGHT - mg SHEET 1/1


1

1

D


A

Luminaire: LEDiL Oy CN13172_LENA-WAS-DL_(Megazenigata_GW6D) Eff.74.9%
Lamps: 1 x SHARP_Megazenigata_(GW6DMC40NFC)_1085.92lm@250mA_P=8.49295W_I=249.8mA

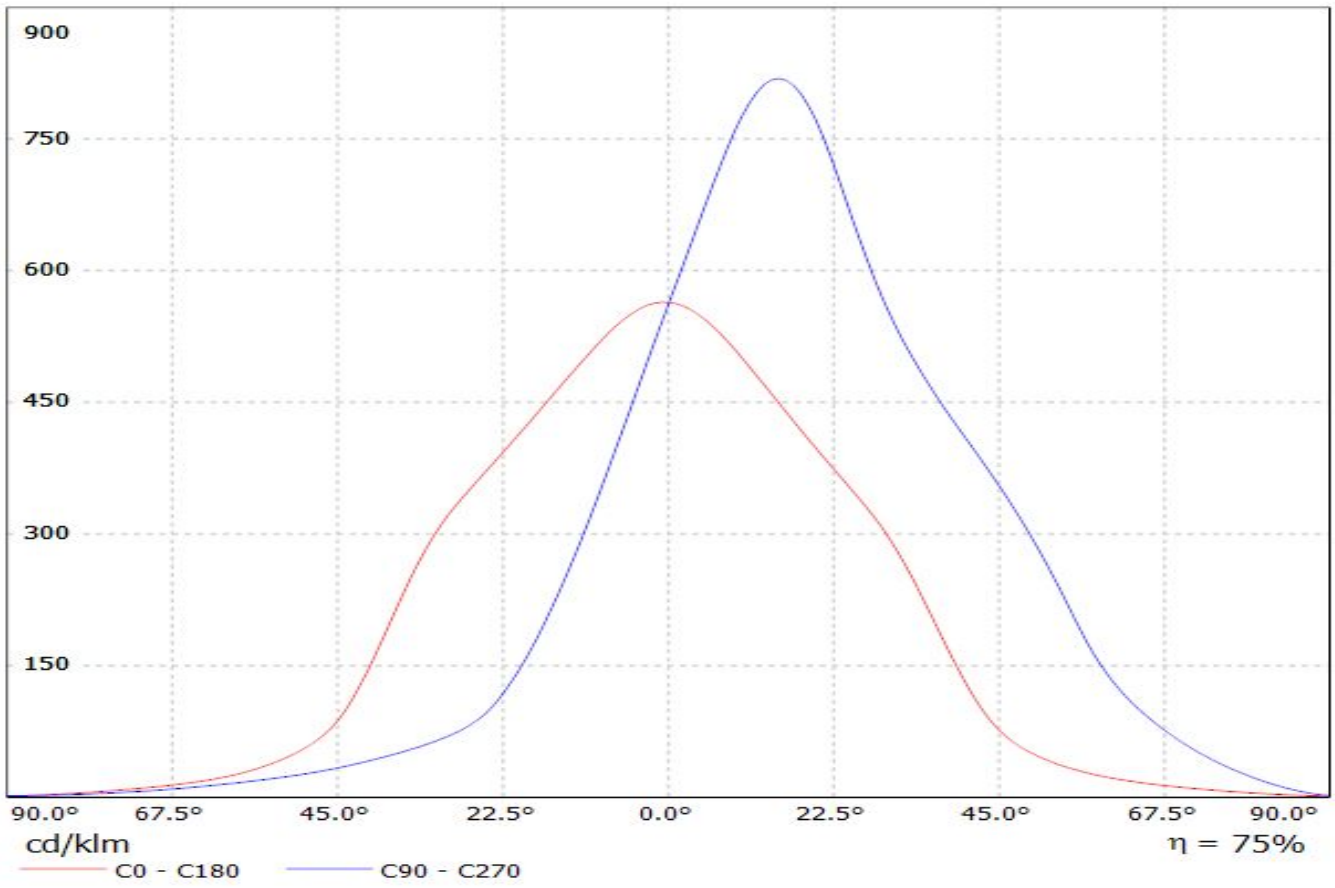

Luminaire: LEDiL Oy CN13172_LENA-WAS-DL_(Megazenigata_GW6D) Eff.74.9%

Lamps: 1 x SHARP_Megazenigata_(GW6DMC40NFC)_1085.92lm@250mA_P=8.49295W_I=249.8mA

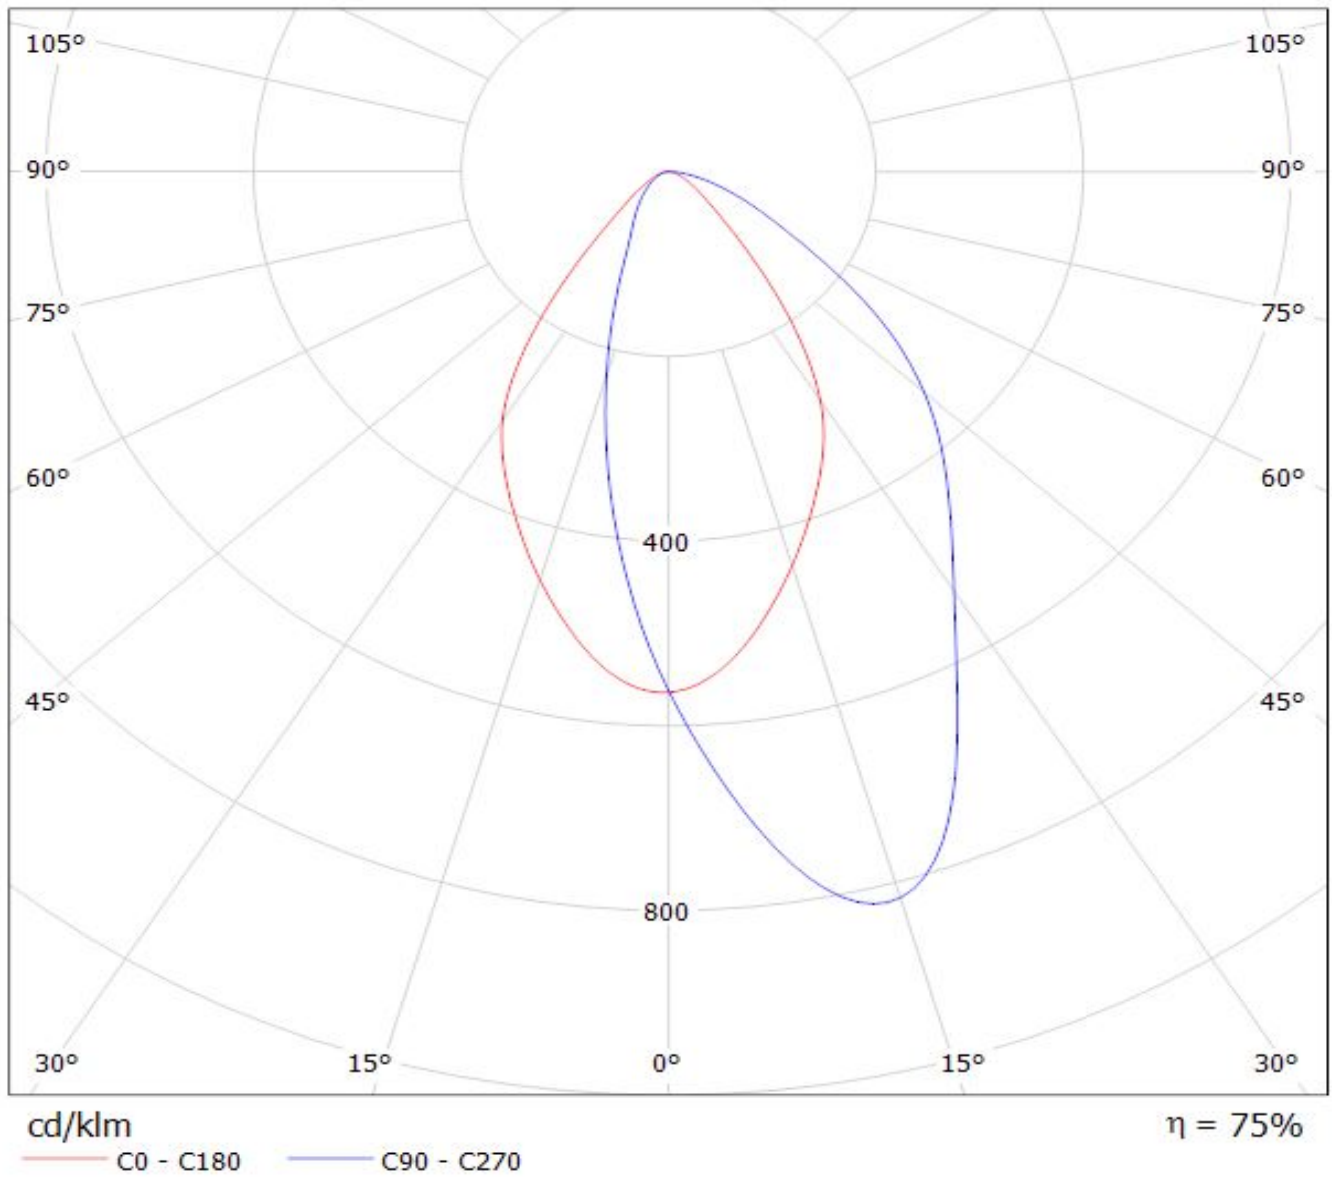

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.