


1700V SiC SBD Parallel Power Module

$$V_{RRM} = 1700V$$

$$I_{DAV} = 50A @T_C = 125^{\circ}C$$

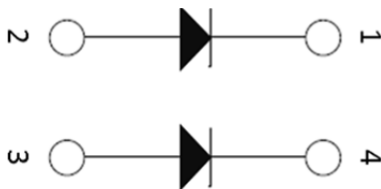

Parallel

Features

- **SiC Schottky Diode**
 - Zero reverse recovery
 - Zero forward recovery
 - Temperature Independent switching behavior
 - Positive temperature coefficient on V_f
- Low stray inductance
- High junction temperature operation

Applications

- Supplies for DC power equipment
- Rectifier for induction heating
- Welding equipment
- High temperature and rectifiers

Benefits

- Outstanding performance at high frequency operation
- Low losses and Low EMI noises
- Very rugged and easy mount
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive T_c of V_f
- RoHS Compliant



Absolute Maximum Ratings ($T_j=25^{\circ}C$ unless otherwise specified)

Parameters	Symbol	Conditions	Specifications	Units
Maximum Reverse Voltage	V_{RRM}		1700	V
Average Forward Current (per SBD)	I_{DAV}	$T_j = 25^{\circ}C$	150	A
		$T_j = 150^{\circ}C$	50	A
Non-repetitive Forward Surge Current	I_{FSM}	$t=8.3\text{ ms}, T_c = 150^{\circ}C$	200	A
		$T=10\ \mu s, T_c = 25^{\circ}C$	800	A
Operating Junction Temperature	T_j		-55 ~ 175	$^{\circ}C$
Storage Temperature	T_{STG}		-55 ~ 150	$^{\circ}C$

Electrical Characteristics (T_j=25°C unless otherwise specified)


Parameters	Symbol	Conditions	Min	Typ	Max	Units
Maximum peak repetitive reverse voltage	V _{RRM}		1700	--	--	V
Maximum Reverse Leakage Current	I _{RM}	V _R = 1700V, T _j = 25 °C	--	120	750	μA
		V _R = 1700V, T _j = 150 °C	--	250	1600	μA
Diode Forward Voltage	V _F	I _F = 50A, T _j = 25 °C	--	1.6	1.9	V
		I _F = 50A, T _j = 150 °C	--	2.5	2.8	V
Total Capacitive Charge	Q _C	V _R =1700 V, I _F <I _{F,max} , T _j = 25 °C	--	370	--	nC
Switching Time	t _C	di _F /dt = 200 A/μs, T _j = 150 °C	--	--	10	ns
Total Capacitance	C	V _R = 0V, f = 1 MHz	--	4240	--	pF
		V _R = 550V, f = 1 MHz	--	240	--	pF
		V _R = 1100V, f = 1 MHz	--	235	--	pF

Thermal and Package Characteristics (T_j=25°C unless otherwise specified)


Parameters	Symbol	Conditions	Min	Typ	Max	Units
Junction to Case Thermal Resistance	R _{THJC}	Per Diode	--	--	0.27	°C/W
Junction to Ambient Thermal Resistance	R _{THJA}	Per Diode	--	--	20	°C/W
Mounting Torque	M _d				1.5	N-m
Terminal Connection Torque	M _{dt}		1.3	--	1.5	N-m
Package Weight	W _t			32		g
Isolation Voltage	V _{ISOL}	I _{ISOL} < 1mA, 50/60Hz, t=1 min	2500	V		

Product Number and Descriptions


Part Number	Rating	Pin 1	Pin 2	Pin 3	Pin 4
GHXS050A170S-D3	1700V, 40A	Cathode 1	Anode 1	Anode 2	Cathode 2

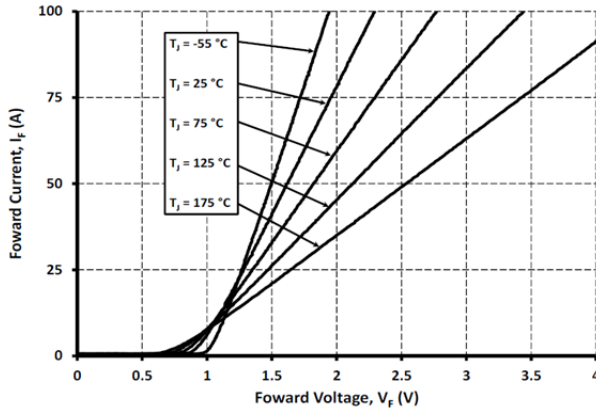


Forward Characteristics vs. Junction Temperature

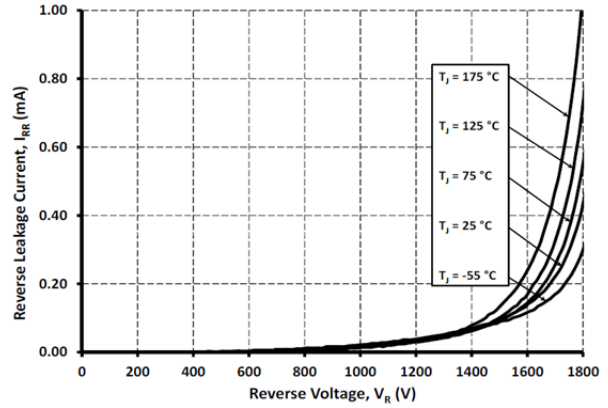


Reverse Characteristics vs. Junction Temperature

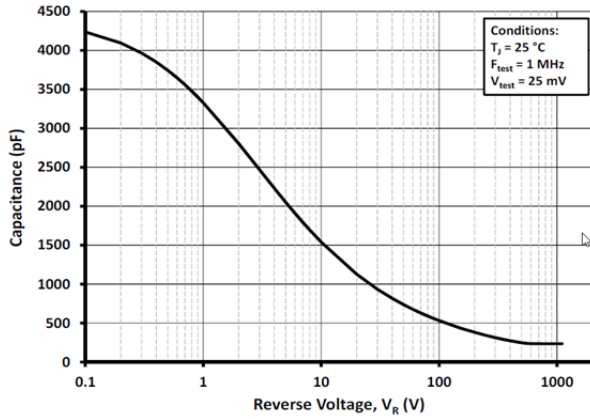

Capacitance Curve vs. Reverse Bias

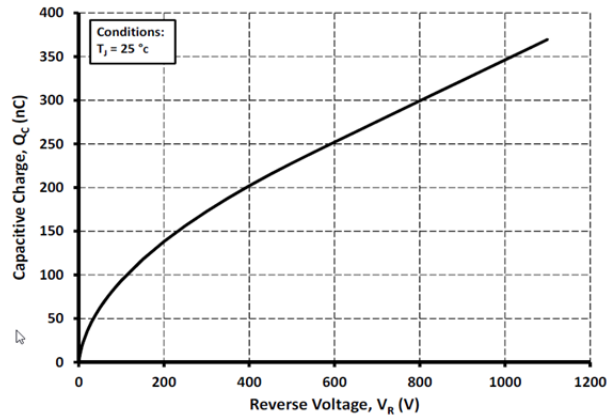


Recovery Charge vs. Reverse Voltage

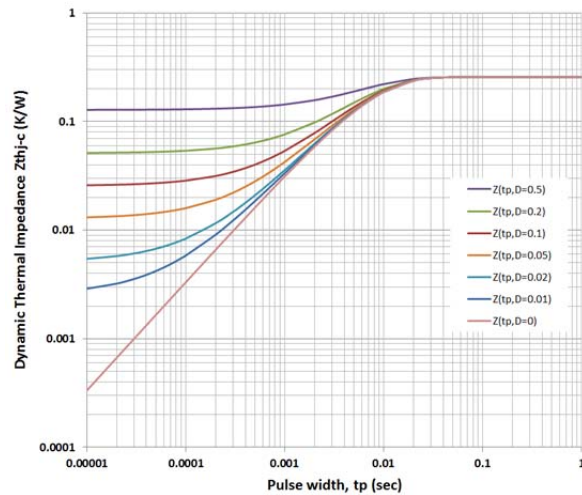

Dynamic Thermal Resistance

SOT-227 Package Outline

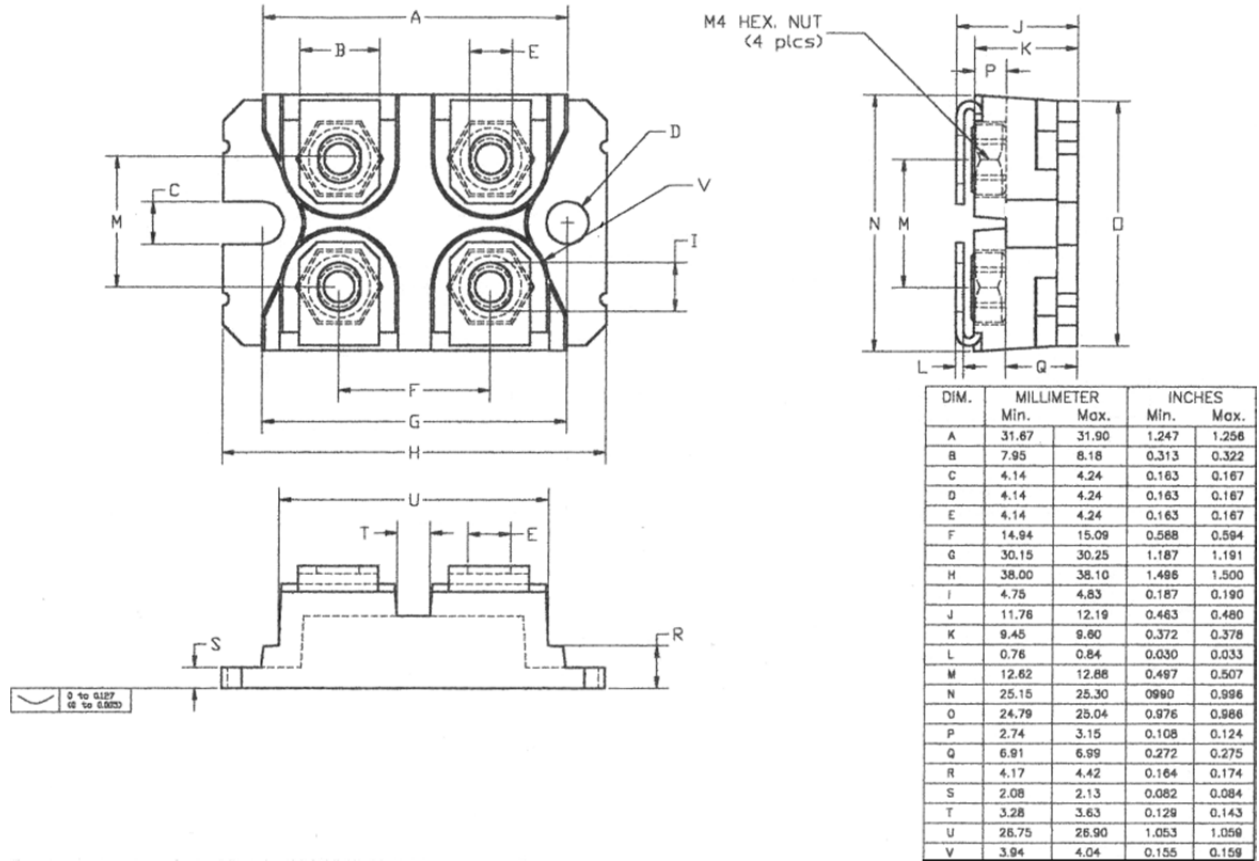

Revision History

Date	Revision	Notes
1/25/2017	0.1	Initial release

Global Power Technologies Group

20692 Prism Place
 Lake Forest, CA 92630
 TEL (949) 207-7500
 FAX (949) 613-7600
 E-mail: info@gptechgroup.com
 Web site: www.gptechgroup.com



Notes

- **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented March, 2013. RoHS Declarations for this product can be obtained from the Product Documentation sections of www.gptechgroup.com.

- **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact our office at GPTG Headquarters in Lake Forest, California to insure you get the most up-to-date REACH SVHC Declaration.

REACH banned substance information (REACH Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control.

- To obtain additional technical information or to place an order for this product, please contact us. The information in this datasheet is provided by Global Power Technologies Group. GPTG reserves the right to make changes, corrections, modifications, and improvements of datasheet without notice.