
	m		0	₩	Þ]	
A Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z						4	
			LAYOUT SHOWN AS E	XAMPLE		3	
Kev	ing Shown as example						
CHARACTERISTICS	Connector dimension						
-Standard : Based on MIL-DTL-38999 Series III	Dim Nominal						
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	-Shell Material : Aluminium -Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer						
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	F06AN		2				
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		A 14-10-2016	First Release				
		ISS DATE	Latest modification - by		MOD N°		
		Designed By:	Date:	CUSTOMER	R DRAWING		
		TITLE Aluminium Plug 8D series					
BASIC SERIES: 8D 5 - 17 F 06 A SHELL TYPE : Plug with RFI Shielding	N	SCALE -	General linear Tolerances: ±	NPRDS /	59	1	
CONTACT TYPE : Standard Crimp Contact	ORIENTATION : N	SOURIAU	WWW.SOURIAU.C		ument is the property of SOURIAU t not be reproduced or		
SHELL SIZE : 17	CONTACT TYPE : PIN(500 Matings)	FORMAT	COUDIA:		icated without permission	-	
PLATING : F = Nickel	CONTACT LAYOUT : 17-06	FORMAT A3	SOURIAU		SHEET		
			8D517F(1/2]	
H I G I F	E T	D	C	B	А		

	т		Q	г		m	D		0	
		Contact	Layout							
4		-× (D = F	$A \oplus B + x$							
		C C C C C C C C C C C C C C C C C C C	-Y ete ment 17-6) Location							
ى	Shell Arrange size no. 17 -6	(mm) A +.121 (3.1) B +.241 (6.1) C +.000 (0.1) D 241 (6.1) E 121 (3.0) F +.000 (0.0) ment Number of contacts	(mm) 107) + 209 (5.31) 12) + .000 (0.00) 12)241 (6.12) 12) + .000 (0.00) 17) + .209 (5.31) 100) + .000 (0.00) e Service Contact Superse tcs rating location							
				~~					SOURIAU shall not b due to a use of th the Specifications issu	he Products w
2								[Count FR
							A ISS Desi		PN: 6 First Release Latest modification - b Date:	: 8D517
_							S	TITLE		Alumir General linear Tolerances: ±
								DURIAU		DURIAU.C
		I			1	7				OURIAU 8D517F
	Н		G	l F		E	D		С	

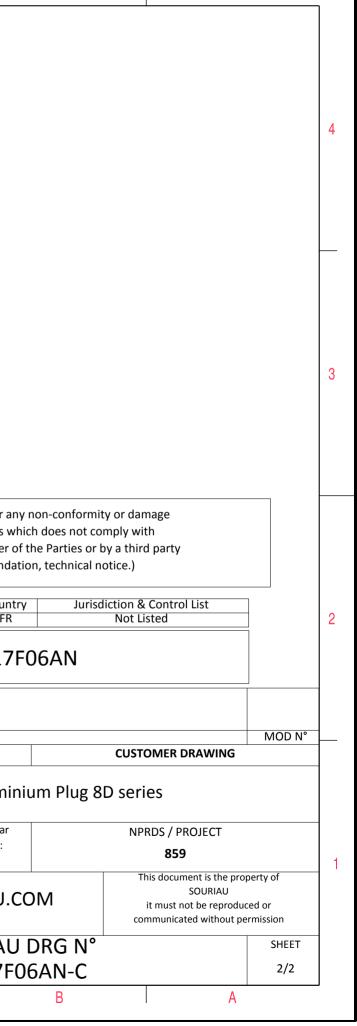

 \triangleright

σ