





unit: mm

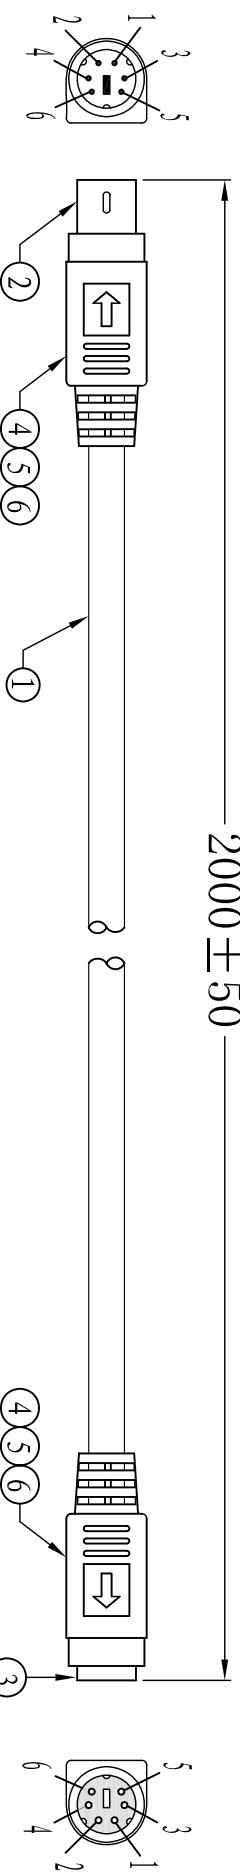

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
SHELL	D
	SHELL

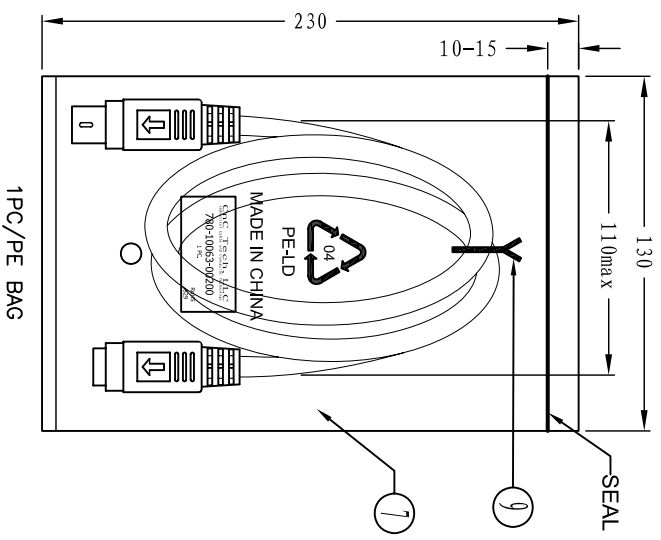

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

⑨	TIE	1	WHITE L=100mm
⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS"
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA" + "1PC"
⑥	TUBE	2	HEAT SHRINK TUBE BLACK ODD.6*7MM
⑤	IN JACKET	5.29	CLEAR LD-PE (Mould NO.:NM-65)
④	OUT JACKET	8.19	PVC 40P COLOR:BEIGE(IV-29)(Mould NO.WM-149)
③	CONN	1	MINI DIN 6PIN FEMALE SOLDER TYPE PIN 鍍前鍍后轉 INSULATOR COLOR:BLACK
②	CONN	1	MINI DIN 6PIN MALE SOLDER TYPE PIN 鍍前鍍后轉 INSULATOR COLOR:BLACK
①	CABLE	1	NOUL 28AWG*6C+D+AL/MY JACKET:BEIGE(IV-29) ODD.0mm L=2000±15MM
No.	NAME	Q'TY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHGS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	780-10063-00200
DECIDE BY		DATE	2012-02-17
VERSIONS/EDITEON	A/0	PROJECTION	