


Specifications

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max
 Insulation Resistance:1000M ohm. Min
 Withstanding Voltage:600V AC For one minute
 Operating Temperature Range : -40°C to +105°C

Material:

Plastic:PBT (UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated

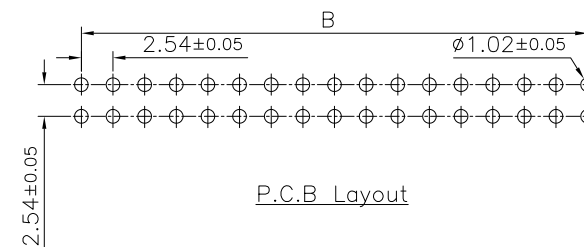


Notes:


60P、64P With Three Key
 All Other Pin With One Key

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
6	27.12	5.08	26	52.52	30.48
8	29.66	7.62	30	57.60	35.56
10	32.20	10.16	34	62.68	40.64
12	34.74	12.70	40	70.30	48.26
14	37.28	15.24	50	83.00	60.96
16	39.82	17.78	60	95.70	73.66
20	44.90	22.86	64	100.78	78.74
24	49.98	27.94			

MATING PART
3030-XX-0102-00

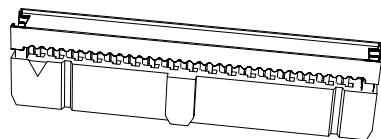

MATING PART
3030-XX-0101-00

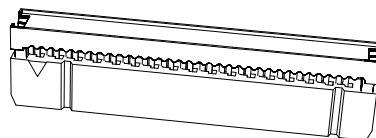

RoHS Compliant

				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology	DESCRIPTION: 2.54mm Shrouded Header With Ejector Straight Type	SIZE A4
				CHECKED: Jerry Chen	UNIT: MM SCALE:1:1			
	05-FEB-2020			APPROVAL: Rory Chen	SHEET: 1 / 1	PART NO:	3010-XX-001-12-00	
REV	DATE	FILE	BY		PROJECTION:			