
т	വ	н т	m	0





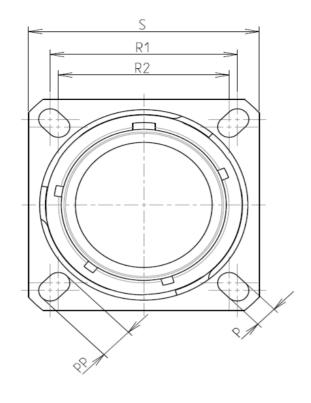

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 500 hours

: 15.75 g ± 10%

8D 0

G

13

W

98

Ρ


F

А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

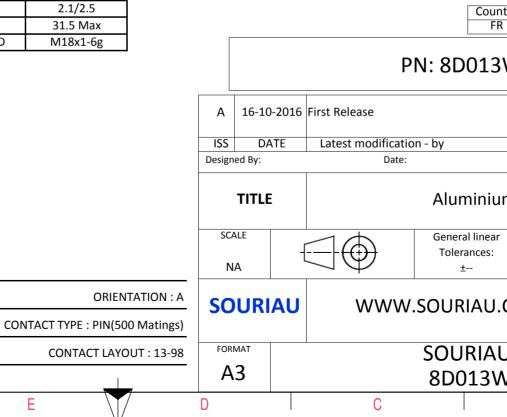

	σ		Þ		
					4
SS EXA	AMPLE				3
whice er of t adatic untry R	on, technical n Jurisd	mply with by a third party	st		2
3W	'98PA				
		CUSTOMER DRA		/IOD N°	
um	Receptacl	e 8D series			
ar		NPRDS / PROJ 859	ECT		1
I.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	J DRG N° SHEET /98PA-C 1/2			SHEET	
v v 3	B		A	,-	

		۵	ار	m	D		0	
		Contact Layout						Panel Cutout
4	3	$ \begin{pmatrix} \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet \\ \bullet & \bullet &$				SQUAR	RE FLANGE RECEPTACLE REAR MOUNTING R1	(TYPE 0)
	Cont positio A B C C D E F G G H J J K	n D (mm) (mm) +.000 (0.00) +.195 (4.95) +.125 (3.18) +.150 (3.81) +.123 (4.90) +.030 (0.76) 104 (4.17) 105 (2.67) +.193 (4.90) +.015 (3.43) 164 (4.17) 105 (2.67) 193 (4.90) +.030 (0.76) 125 (3.18) +.150 (3.81) +.026 (1.85) 015 (0.38)						
ى ن	00	umber of contacts Service Contact Iocation Iocation 10 20 I All MS20051-98						Dim ØA ØAA R1 ØT
	_							
							due to a use the Specification	not be liable for any of the Products whi sissued by either of onal recommendati
N								Country FR
							P	N: 8D013W
						16-10-2016 Fi		
	-				ISS Designed		Latest modification	on - by
					r	TITLE		Aluminium
-					SCAL NA		\bigcirc	General linear Tolerances: ±
					SOL	JRIAU	www	.SOURIAU.C
					FORM			SOURIAU 8D013W9
	Н	G	F	E	D		С	

