

NOTES:

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
4. NO CONTACTS ON POS. A1 - A3
5. METAL BRACKETS: ZINC DIE CAST; 300µm COPPER / 40-120µm NICKEL / 120-200µm TIN
6. THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
9. CONNECTOR IS PART MARKED: 3025W3PAT99N20X CONEC ABC

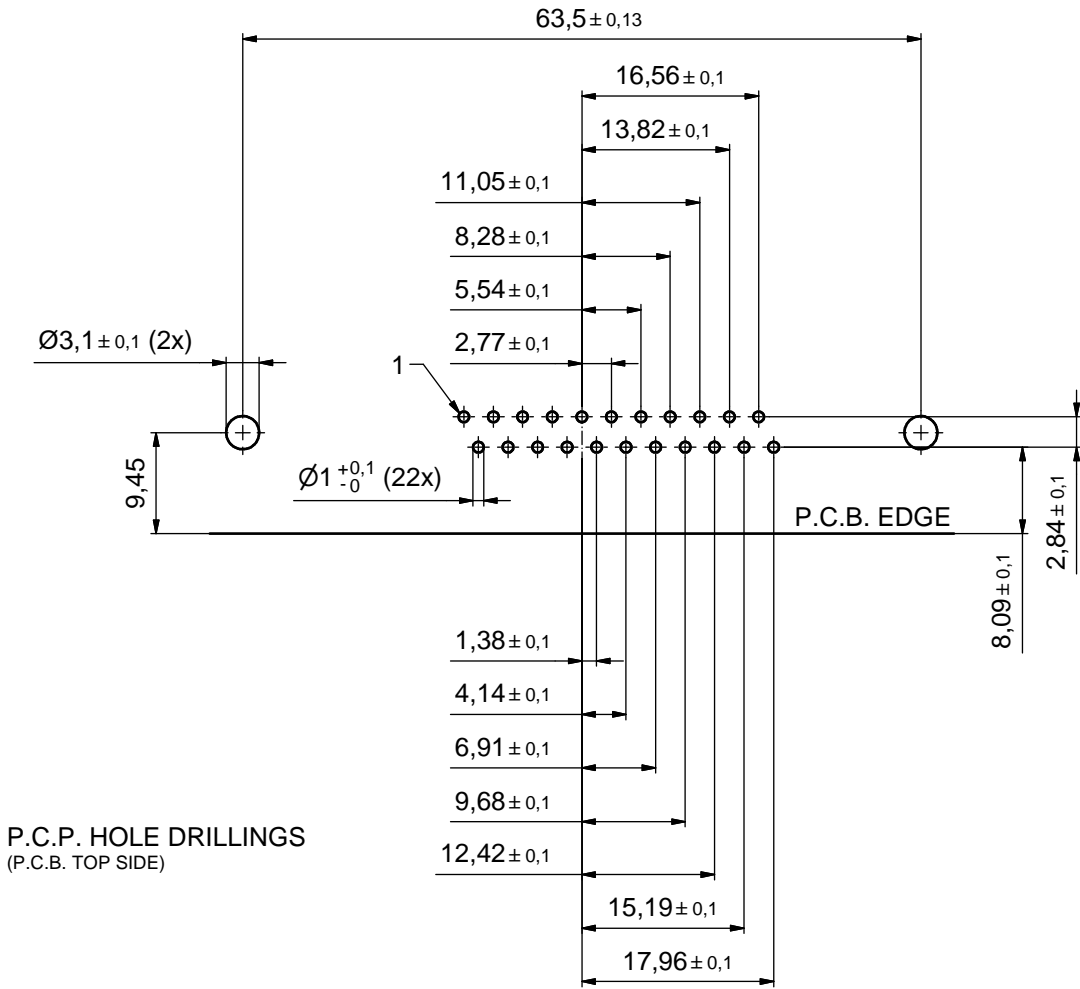
Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH



DO NOT ALTER CAD DRAWING BY HAND

		tolerance				scale: 2:1 (5:1)	
				dim. in mm		material: SEE NOTES	
		date		name		title:	
		drawn 20.03.13		Schmidt		D-SUB COMBINATION MALE 90°	
		appd. 20.03.13		Koch		25W3P	
		norm				with threaded insert and metal bracket	
		d-old				dwg no:	
a Original						13K1A4258	
rev. description		date		name		part no: 3025W3PAT99N20X	

dwg no:		DIN-A3	
13K1A4258		sh: 1/2	



P.C.P. HOLE DRILLINGS
(P.C.B. TOP SIDE)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1	
							material: SEE SHEET 1	
				date	name		title: P.C.B. HOLE DRILLINGS D-SUB COMBINATION MALE 90° 25W3P with threaded insert and metal bracket	
				drawn	20.03.13	Schmidt		
				appd.	20.03.13	Koch		
				norm				
				d-old			dwg no:	
	a	Original					13K1A4258	
	rev.	description	date				name	
							DIN-A3	
						sh: 2/2		