

Ŧ	۵	П	m	D	0



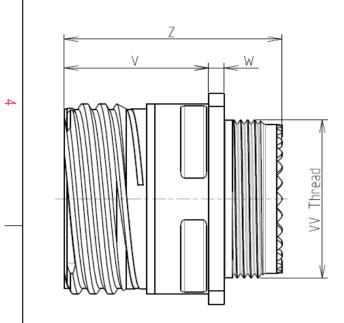

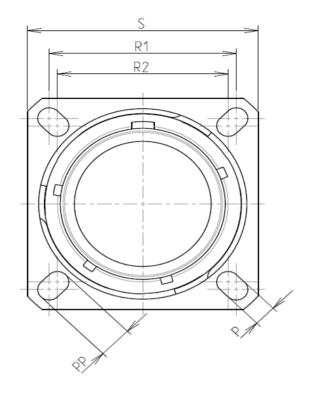

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	: -65°C to +200°C
	-Salt Spray	: 48 hours
	-Mass	: 37.81 g ± 10%

8D 0

G

17

-

F

06

S

F

А


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			


ORIENTATION : A

CONTACT LAYOUT : 17-06

CONTACT TYPE : SOCKET(500 Matings)

Е



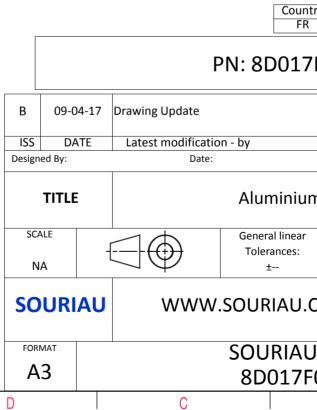

σ		A				
R				4		
AS EXAMPLE				3		
	mply with by a third party otice.) diction & Contr			2		
.7F06SA	F06SA					
			MOD N°			
	CUSTOMER	DRAWING				
um Receptac	Im Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°			SHEET 1/2			
7F06SA-C B		A	1/2	J		
_	·					

