
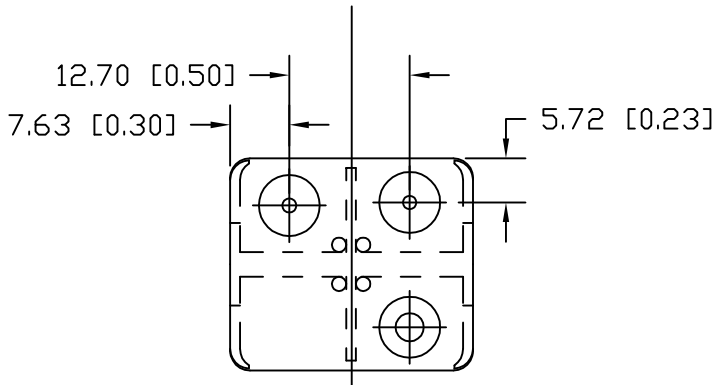
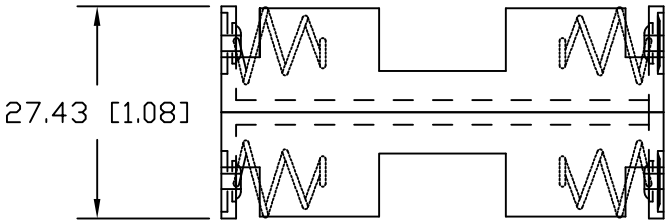



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|---------|-----|---------------------------|------|------|-----|
| 3/18/06 | A | UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 5/06/06 | B | ADDED CONTACT RESI. INFO. | T.B. | B.S. | |
| 3/10/07 | C | ADDED DIM. 12.70 [0.50] | T.B. | B.S. | |
| 3/18/07 | D | ADDED DIM. 7.63 AND 5.72 | T.B. | B.S. | |
| | | | | | |

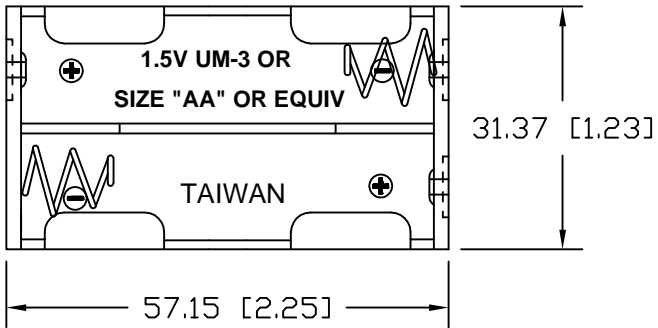

MATERIAL:

HOUSING: POLYPROPYLENE
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000

ROHS COMPLIANT

| | | | |
|---------------------------|---|-----------------------------------|--|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal ±.5 (.020) | Scale | Drawn By B.S. Approved By T.B. | |
| Fractional ± .8 (.030) | Title 4 "AA" BATTERY HOLDER | | |
| Angular ± 3° | Date 3/18/07 | Drawing Number BH24AAB | |