

Ŧ	D G	П	m	D	C C



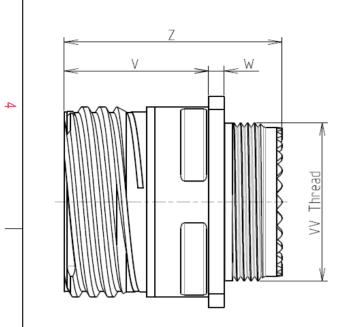



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

ω

 $\mathbf{N}$ 

-Standard : Based on MIL-DTL-38999 Series III

1	-Shell Material	: Aluminium		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souria	u contacts and Accessories		
	-Temperature Range	: -65°C to +200°C		
	-Salt Spray	: 48 hours		
-	-Mass	: 28.21 g ± 10%		

8D 0

17

-


F


06


Ρ

Ν

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

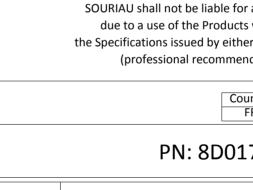

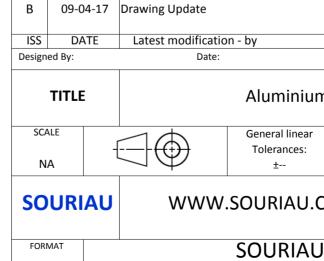

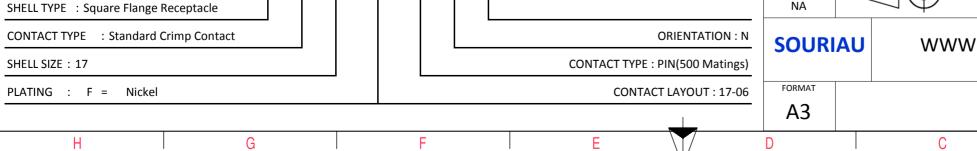

	œ		A	•			
					4		
BUT SHOWN AS EXA	MPLE				3		
t be liable for any non-conformity or damage t the Products which does not comply with ssued by either of the Parties or by a third party hal recommendation, technical notice.) <u>Country</u> Jurisdiction & Control List FR Not Listed N: 8D017F06PN							
- by					_		
CUSTOMER DRAWING Aluminium Receptacle 8D series							
General linear Tolerances: ±			DS / PROJECT 859 document is the p	roperty of	1		
SOURIAU.COM it must not be reproduced or communicated without permission							
SOURIAU I 8D017F06				SHEET			
	В		А		_		

