


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2


(ON) = MOMENTARY



▲ SPDT ON-(ON)  
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
13. INGRESS RATING: IP40
14. 2011/65/EU (ROHS) COMPLIANT
- ▲ 15. LAMP VOLTAGE: NO LAMP

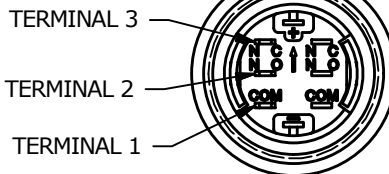

REV	PCR NO	DESCRIPTION	DATE	BY
D	23357	UPDATED RATING TO 2A 48VDC	5/11/18	MJR
C	22880	UPDATED RATING TO 1A 24VDC	6/7/17	MJR

TITLE PV3F2B0NN				
SCALE 3:2	DATE 2/17/2012	DR BMA	DWG 52-PV3F2B0NN	REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED