
	T Q T	D	0	₿ >		
4					4	
ω			LAYOUT SHOWN AS EXAMP	PLE	3	
	Keying Shown as example					
	CHARACTERISTICS Connector dimension -Standard : Based on MIL-DTL-38999 Series III Dim Nominal					
N	Shell Material: AluminiumØS35.7 Max-Shell Plating: Olive drab CadmiumZ31 Max-Insulator: ThermoplasticVV THREADM25x1-6g-Contacts: Copper Alloy: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8µm minimum: Silicon Elastomer	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed				
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories		PN: 8D517W26AB			
	-Temperature Range _: -65°C to +175°C -Salt Spray : 500 hours	A 17-10-2016	First Release			
_	-Mass : 29.47 g ± 10%	ISS DATE	Latest modification - by	CUSTOMER DRAWING	N°	
	Designed By: Date: TITLE Aluminium Plug 8D					
_	BASIC SERIES: 8D 5 - 17 W 26 A B SHELL TYPE : Plug with RFI Shielding Image: Comparison of the second seco	SCALE .	General linear Tolerances: ±	NPRDS / PROJECT 859	-	
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : B SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings)		SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission			
	PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 17-26	FORMAT	SOURIAU DF		т	
		A3	8D517W26			
L	H G F E	D	С	ВАА		

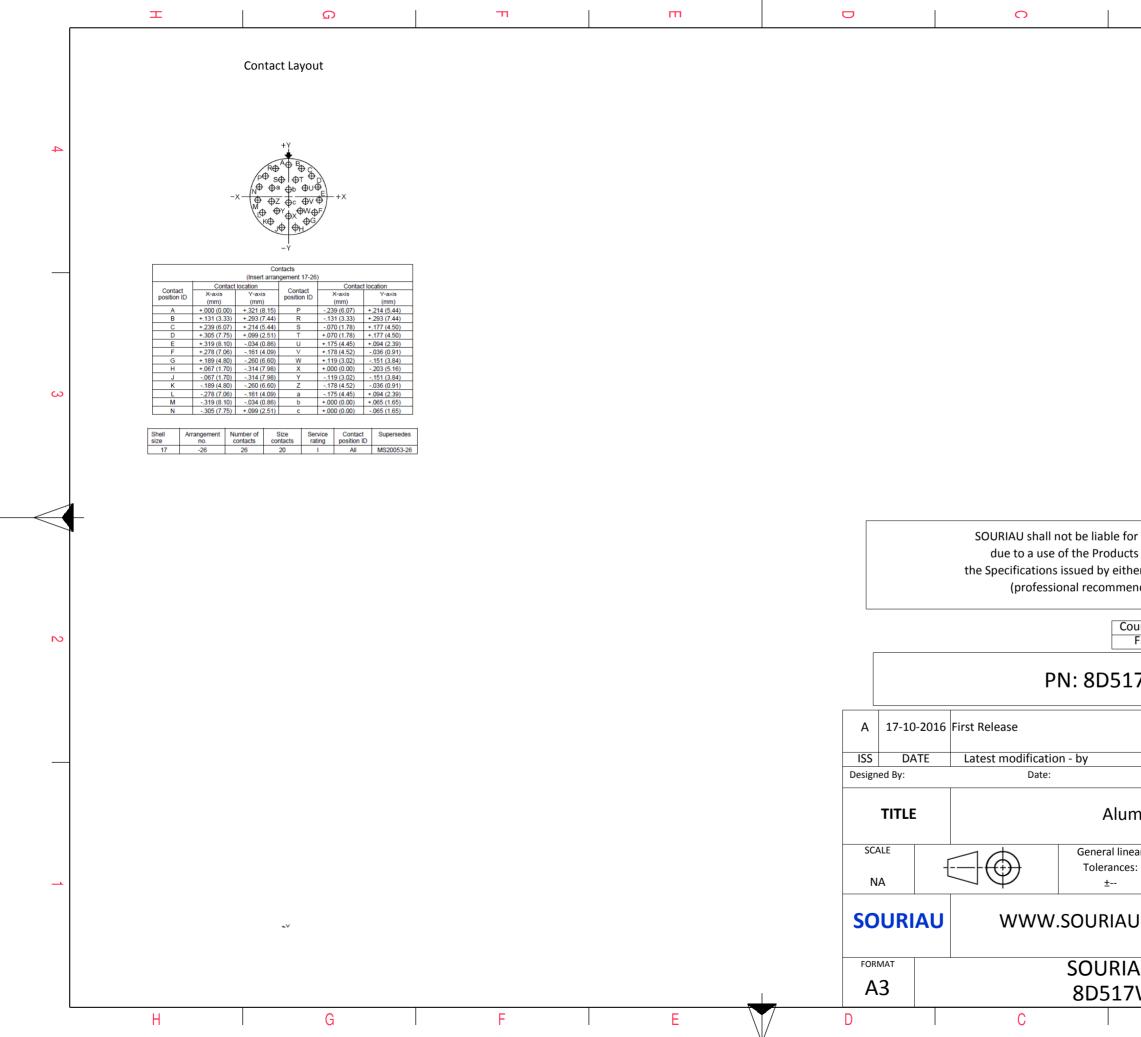

					4		
					3		
any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.) untry Jurisdiction & Control List FR Not Listed 7W26AB							
			VING	MOD N°			
customer drawing ninium Plug 8D series							
ar	NPRDS / PROJECT						
	859						
This document is the property of SOURIAU it must not be reproduced or communicated without permission							
AU DRG N°				SHEET			
W2	6AB-C	1		2/2			
	В		А				

Þ

ω