

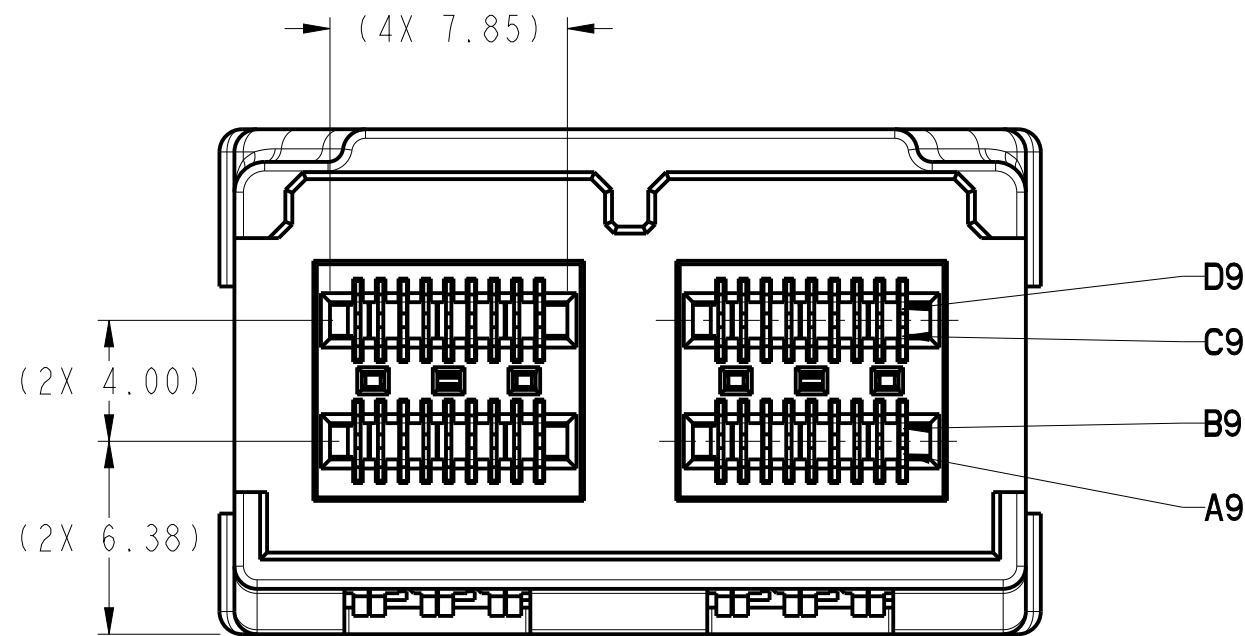
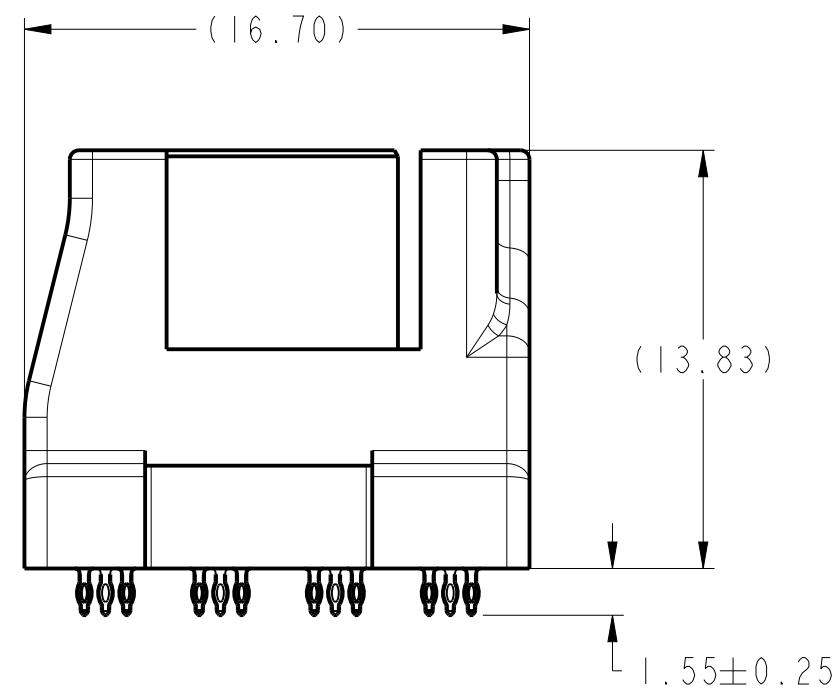


PRODUCT NUMBER	PLATING OPT.
10120667-XXX	OPTION 1
10120667-XXXLF	OPTION 2

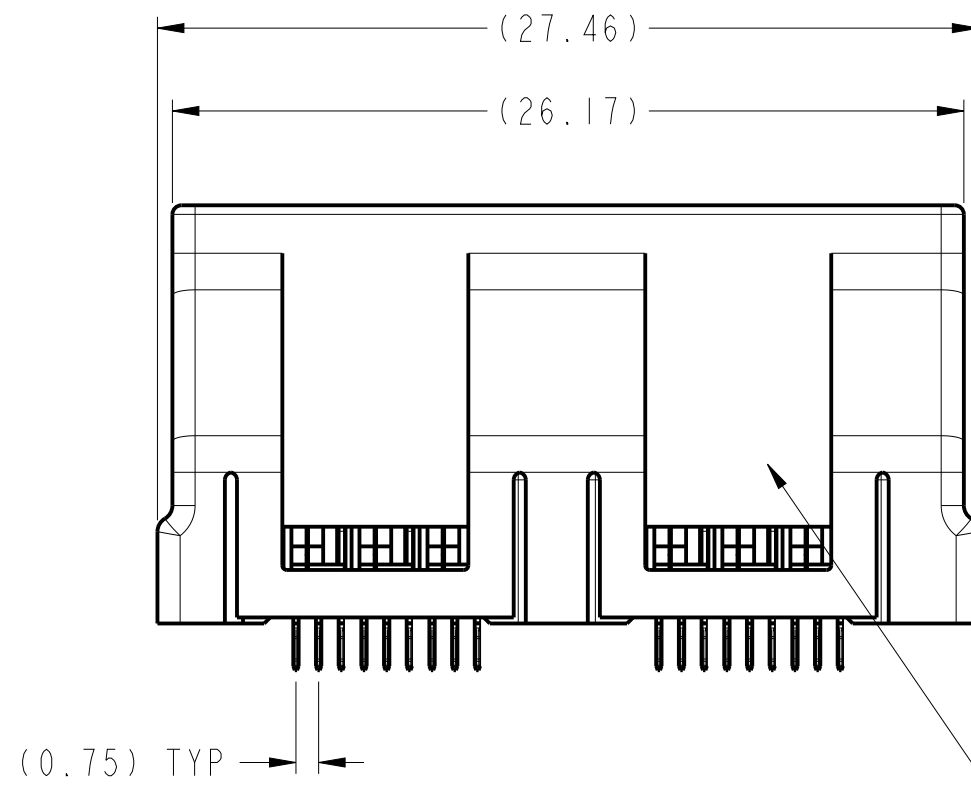

PART NUMBER DESCRIPTION
 10120667 - X 01LF


BASE NUMBER | HOUSING COLOR:
 1: BLACK
 3: NATURAL

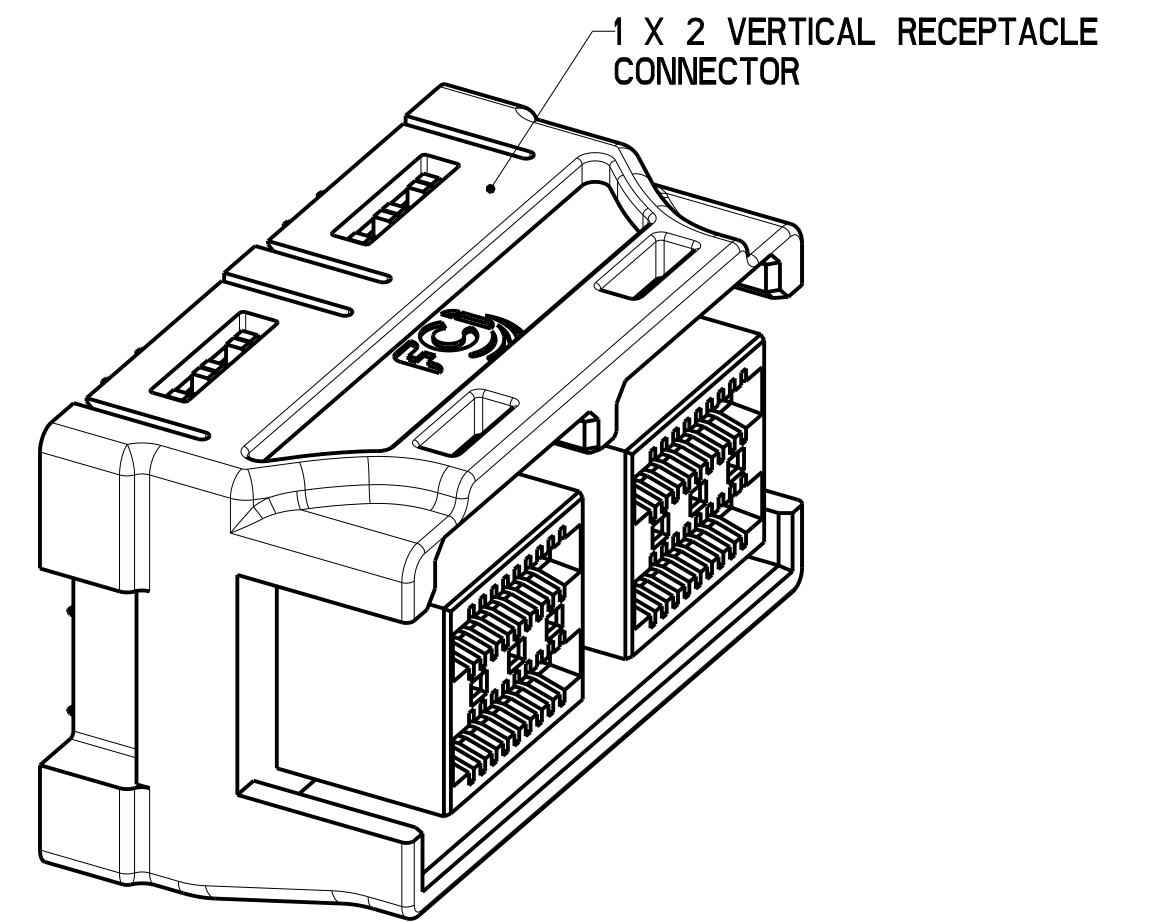




FCI P/N AND DATE CODE ON THIS SURFACE $\triangle F$

NOTES:

- CONNECTOR HOUSING: HIGH TEMPERATURE THERMOPLASTIC GLASS FILLED, UL 94V-0
 TERMINALS: COPPER ALLOY
- FINISHES:
 CONTACT AREA: 0.76um GOLD OVER 2.54 um MIN NICKEL WITH PAO LUBE.
 TAIL AREA:
 OPTION 1: 0.76um - 1.52um TIN/LEAD (90/10) OVER 2.54um MIN NICKEL.
 OPTION 2: 0.76um - 1.52um TIN (LEAD FREE) OVER 2.54um MIN NICKEL.
- PRODUCT SPECIFICATION: GS-12-650
 APPLICATION SPECIFICATION: GS-20-0356
 PACKING SPECIFICATION: GS-14-1490
- MOUNTING HARDWARE:
 $\triangle F$ OPTION 1: M2 X 0.91 SELF-THREADING SCREW
 $\triangle F$ OPTION 2: M2 X 0.80 SELF-THREADING SCREW
 MOUNTING SCREW LENGTH: PCB THICKNESS + (2.5±0.35)mm. $\triangle F$
- THIS CONNECTOR IS DESIGNED TO MEET THE REQUIREMENT OF INDUSTRY SPECIFICATION SFF-8643.

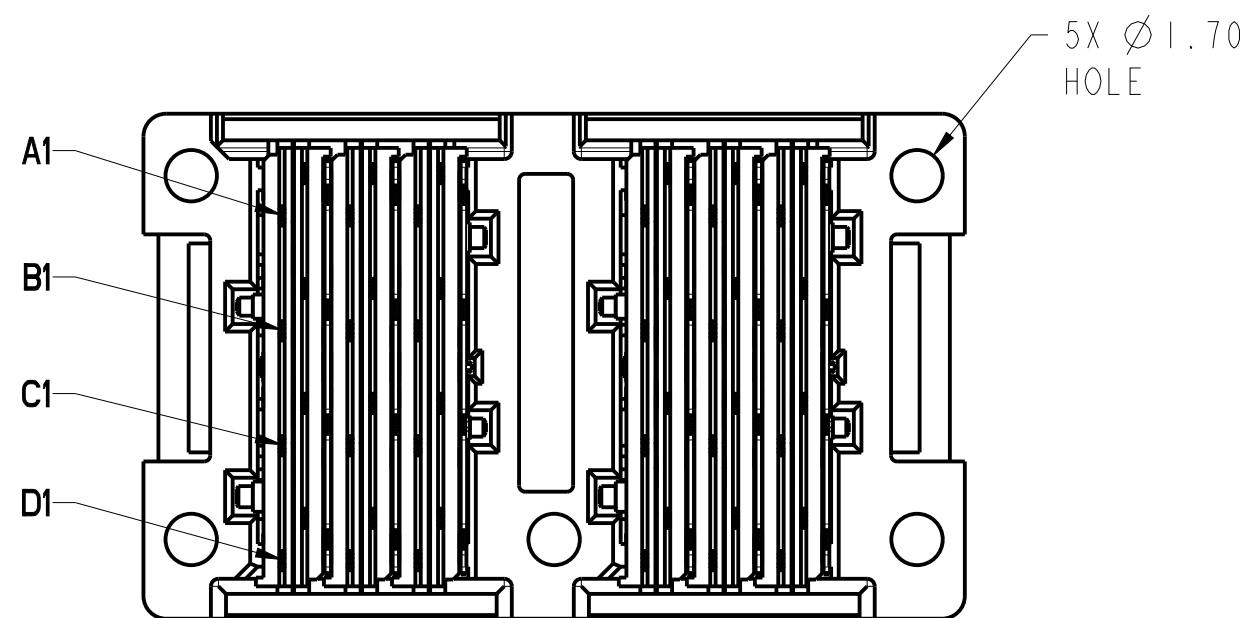

spec ref	-	dr	Deborah Ingram	2012/04/10	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Jacklin Zou	2015/12/09			ecn no	ELX-DG-22744-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Zhen Luo	2015/12/22			rel level	Released		
surface	✓	appr	Pei-Ming Zheng	2015/12/23	product family	INTERNAL VERTICAL ASSEMBLY		dwg no	10120667	
ASME Y14.5	linear	www.fci.com		cat. no.	Product - Customer Draw		rev	F		
	0.X									
	0.XX									
	0.XXX									
	angular									

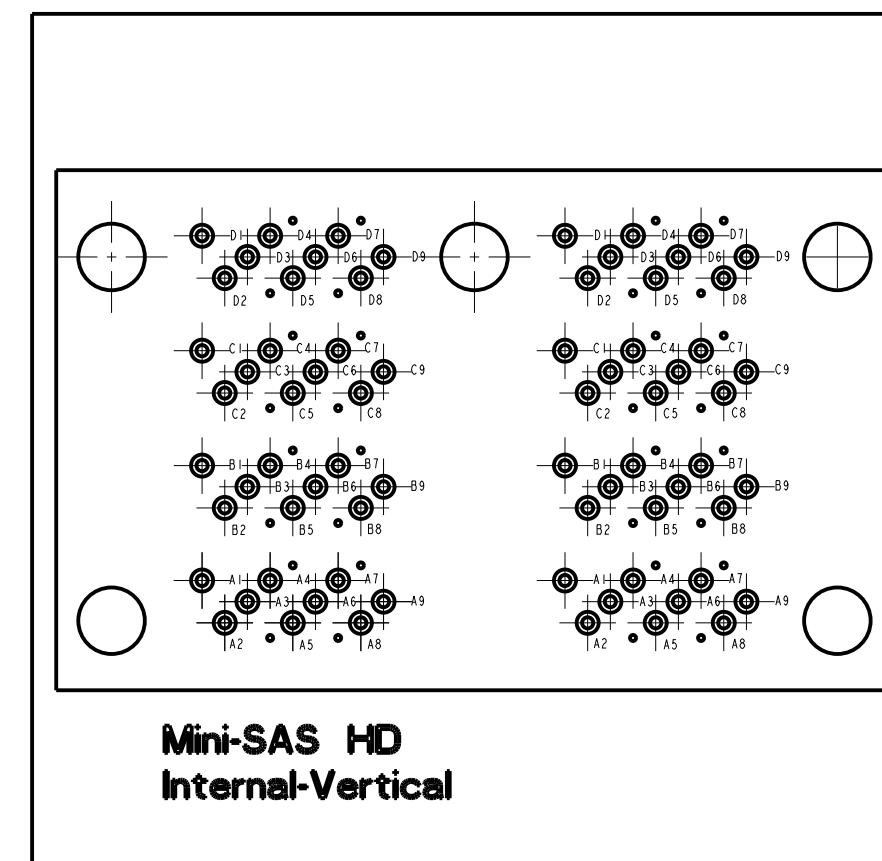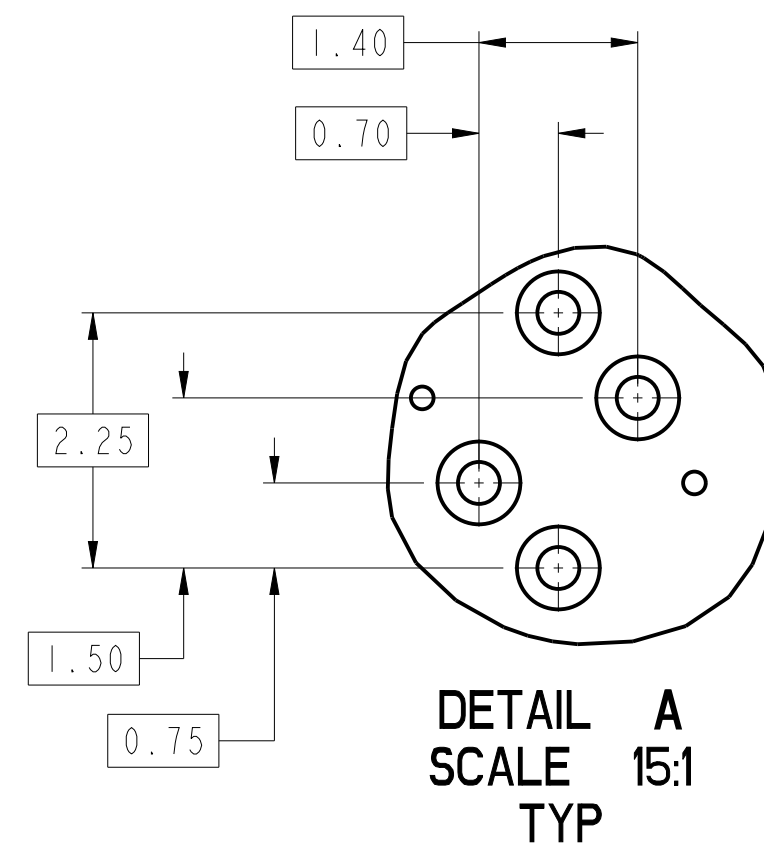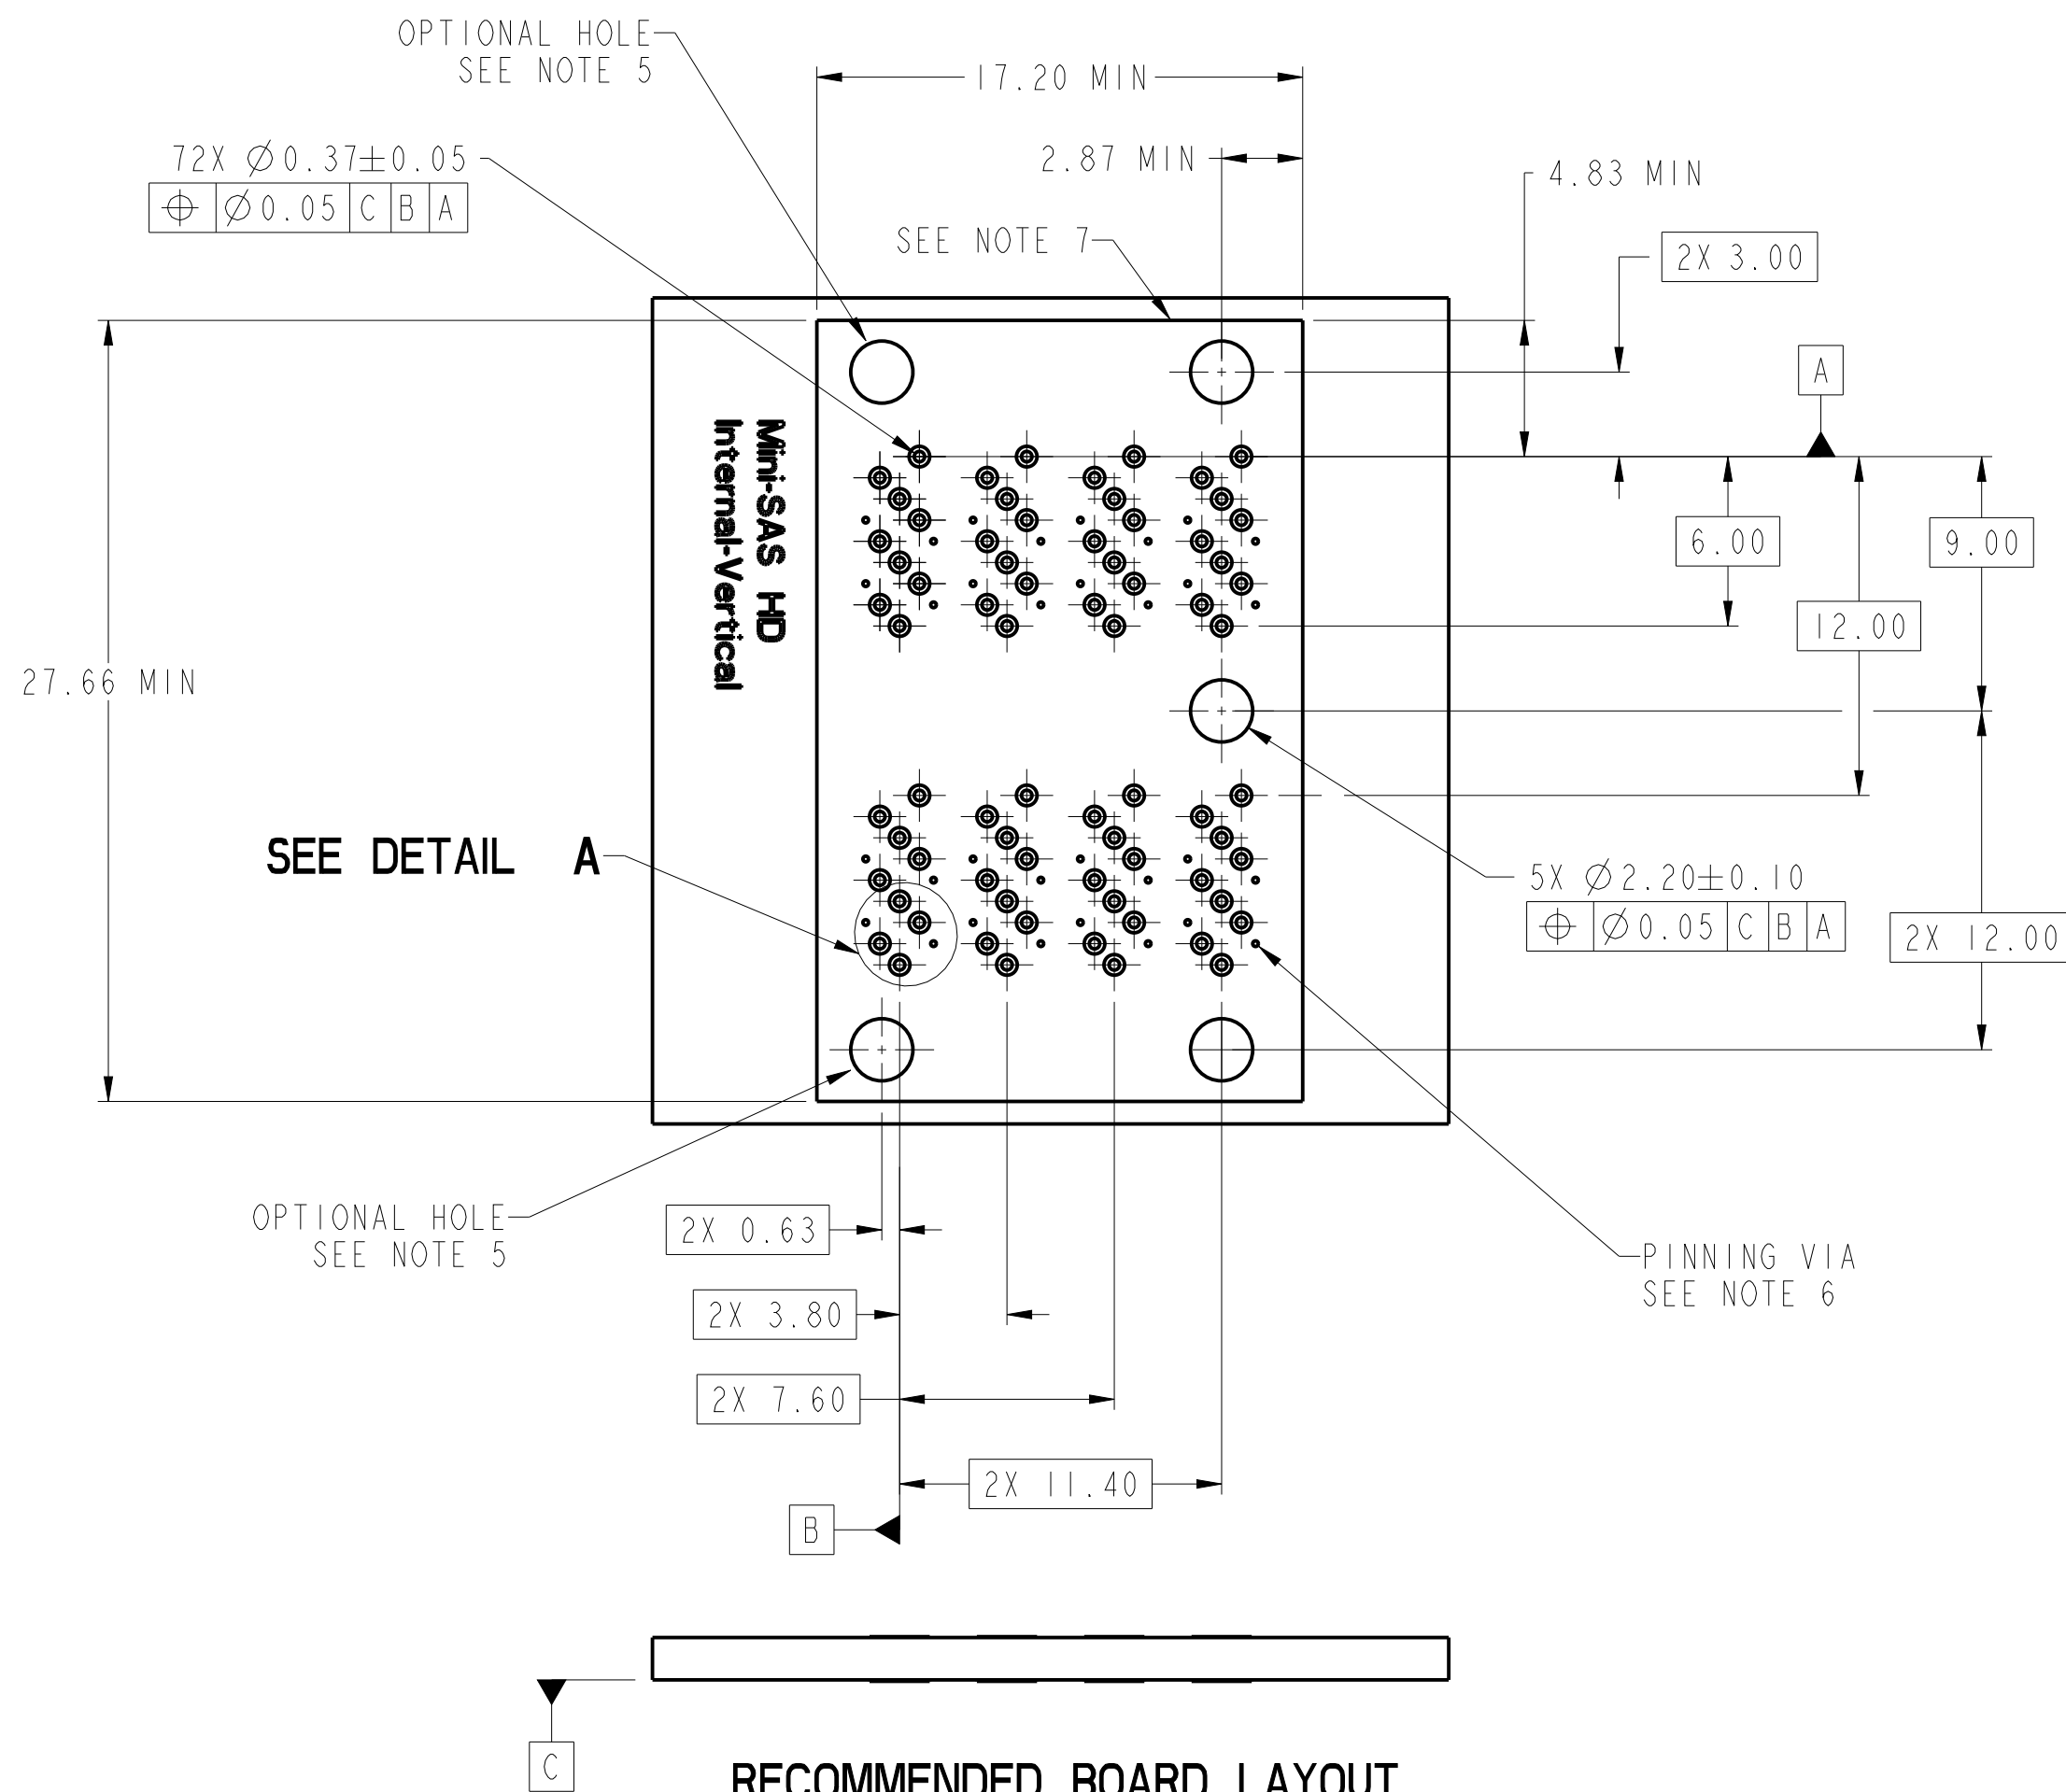




1X2
PIN OUT DESIGNATIONS
ROTATED 90°

NOTES:

1. RECOMMENDED DRILL SIZE FOR A $\varnothing 0.37$ FINISHED PTH IS $\varnothing 0.457$ (#77 DRILL).
2. RECOMMENDED ANNULAR RING AROUND $\varnothing 0.37$ FINISHED PTH IS $\varnothing 0.73$.
3. MINIMUM RECOMMENDED SPACING : 14.00mm.
4. MINIMUM PCB THICKNESS : 1.57mm.
5. USE OF HOLE IS OPTIONAL AND CAN BE ADDED WHEN ADDITIONAL MECHANICAL MOUNTING AND STRAIN RELIEF IS DEEMED NECESSARY.
6. DETAILED INFORMATION OF "PINNING VIA" REFER TO APPLICATION SPECIFICATION GS-20-0356 SECTION 5
7. CONNECTOR KEEP OUT AREA

RECOMMENDED BOARD LAYOUT
SCALE 8:1

spec ref	-	dr	Deborah Ingram	2012/04/10	projection	MM	size	A2	scale	4:1	
tolerance std	ASME Y14.5	eng	Jacklin Zou	2015/12/09			ecn no	ELX-DG-22744-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Zhen Luo	2015/12/22			rel level	Released			
surface	✓	appr	Pei-Ming Zheng	2015/12/23	product family			cat. no.	INTERNAL VERTICAL ASSEMBLY		
ASME Y14.5	linear	0.X	±0.25			dwg no	10120667		rev	F	
	0.XX	±0.13	www.fci.com		Product - Customer Drw		sheet 2 of 4				
	0.XXX	±									
	angular	0°	±1/2°								

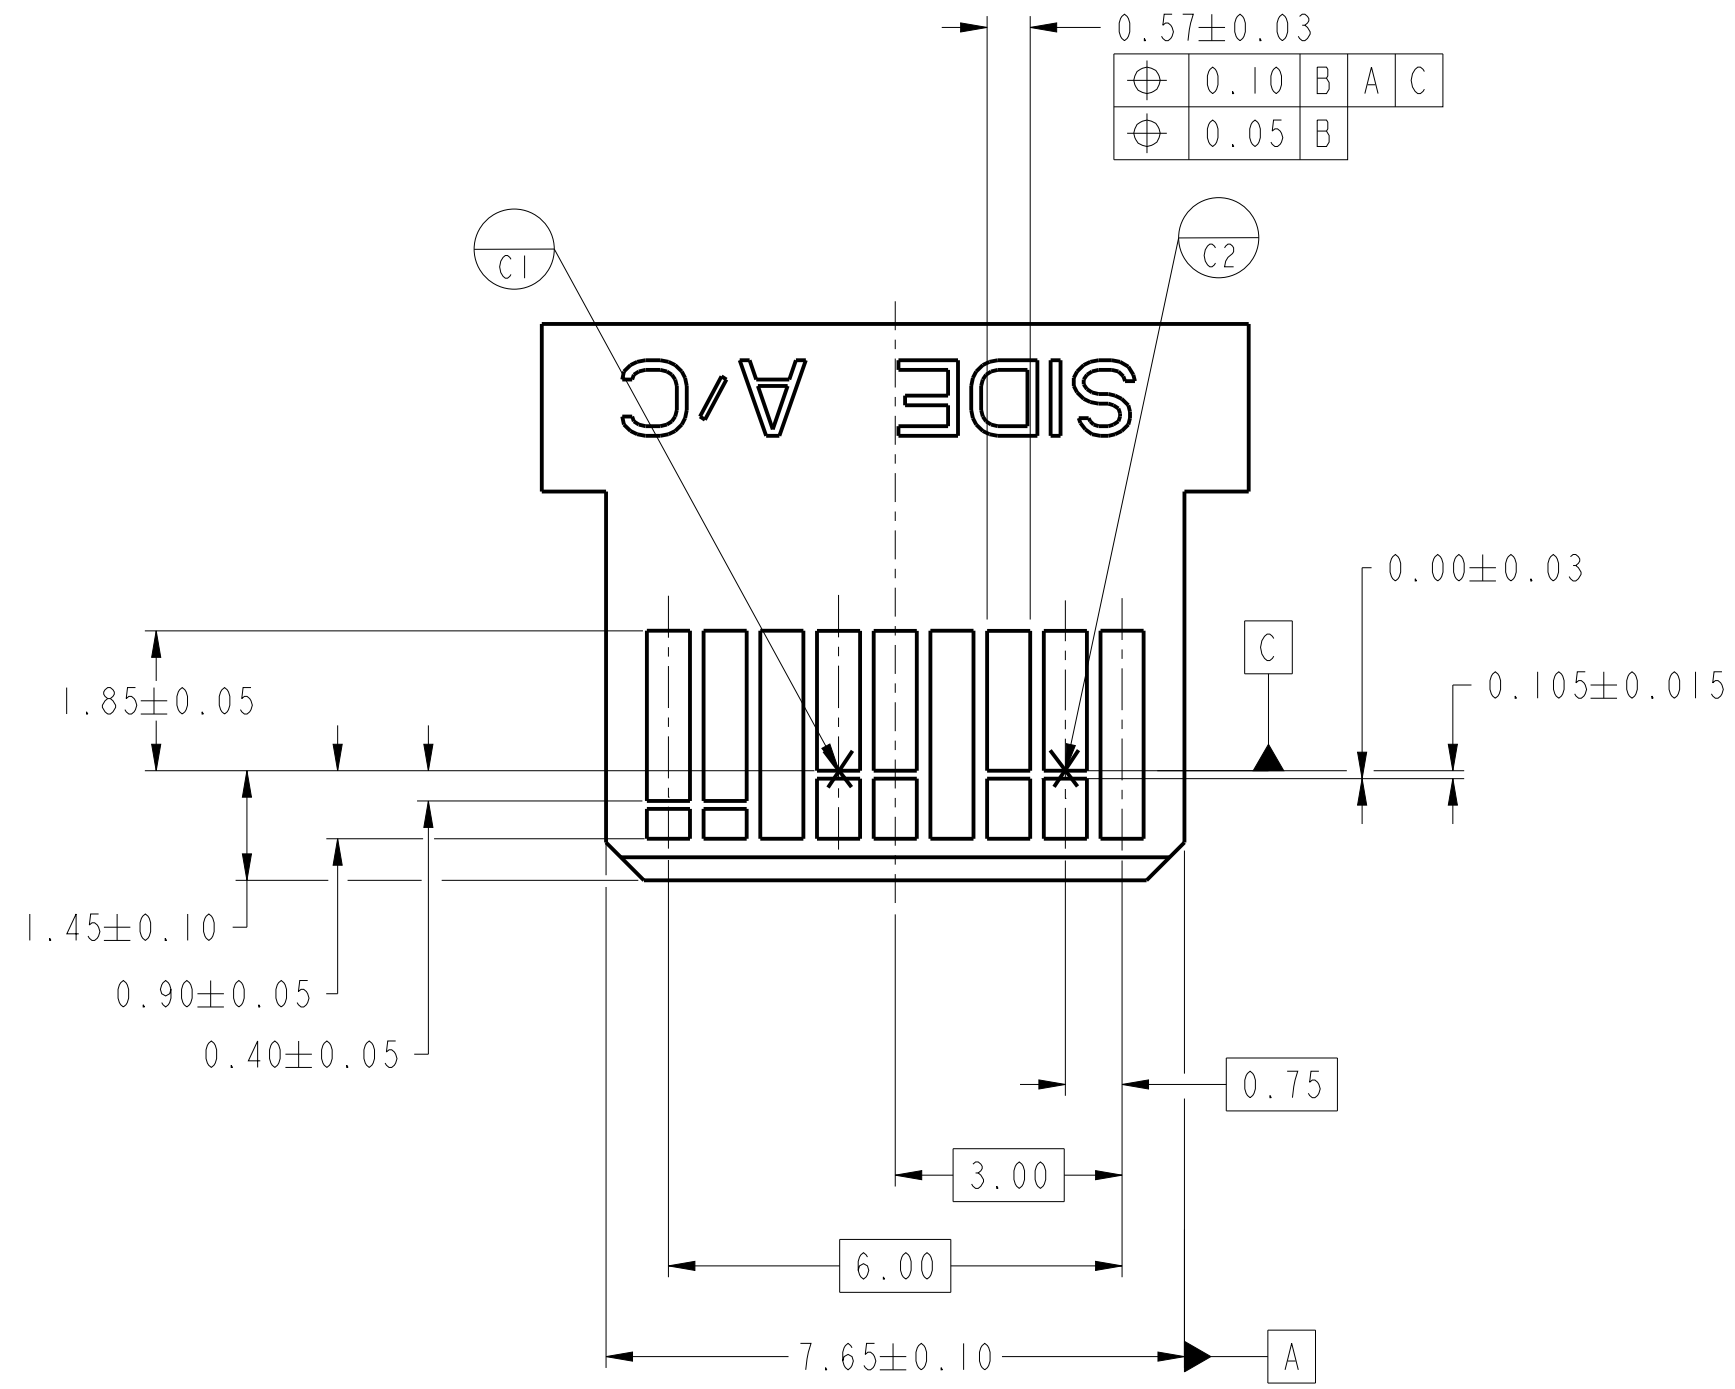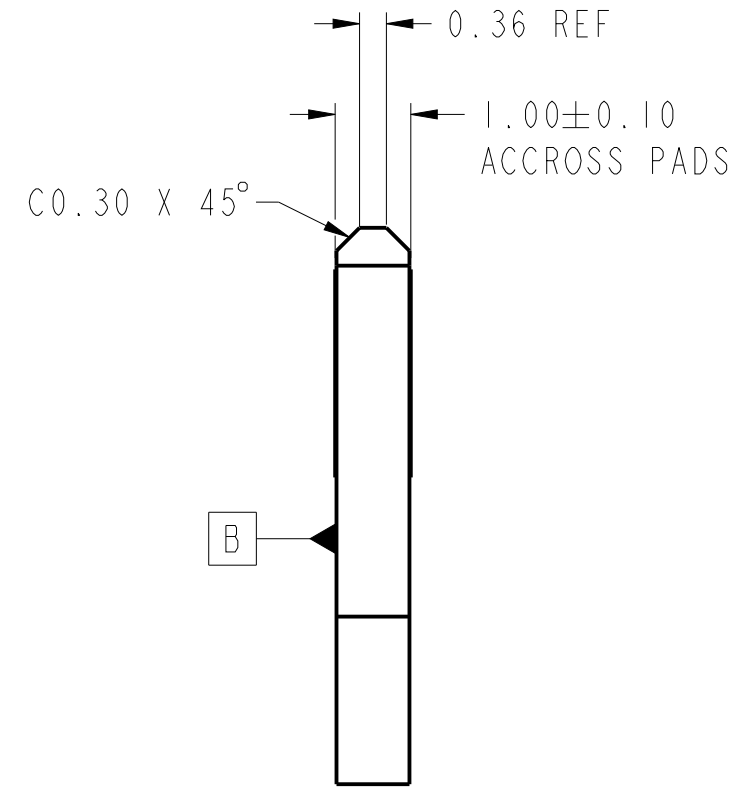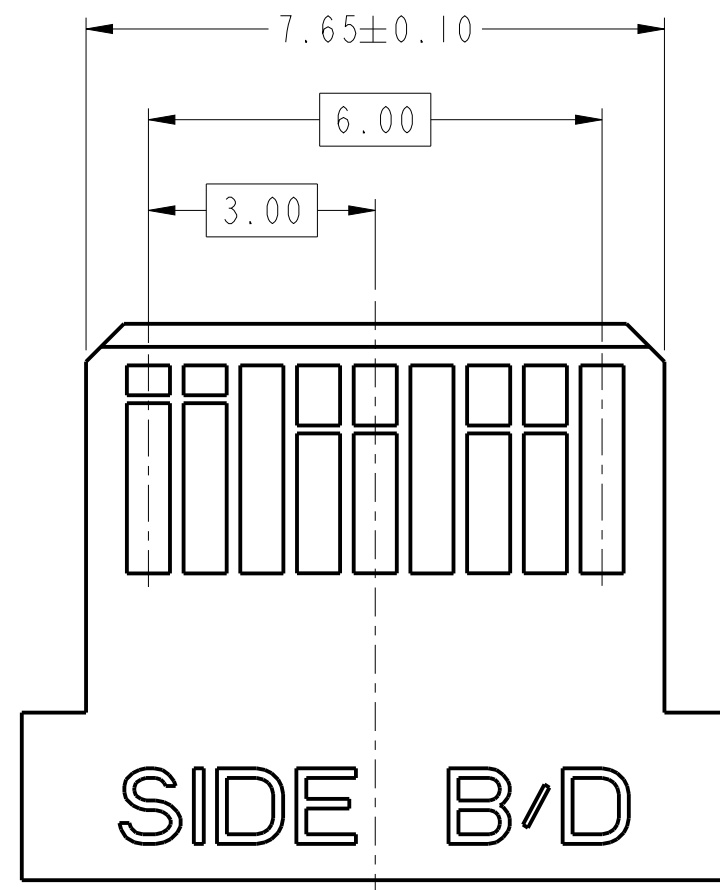



- NOTES:
- 0.05 MINIMUM KEEP OUT SOLDER MASK AROUND ALL PADS.
 - DATUM C TARGETS ARE DEFINED BY THE RESPECTIVE PAD CENTER LINES AND THE LEADING EDGE OF THE TARGET PADS.

spec ref	-	dr	Deborah Ingram	2012/04/10	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Jacklin Zou	2015/12/09			ecn no	ELX-DG-22744-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Zhen Luo	2015/12/22			rel level	Released		
surface	✓	appr	Pei-Ming Zheng	2015/12/23	product family	INTERNAL VERTICAL ASSEMBLY		dwg no	10120667	
ASME Y14.5	linear	0.X	±0.25	www.fci.com	cat. no.	Mini-SAS HD VERTICAL ASSEMBLY		rev	F	
	angular	0°	±1/2°	Product - Customer Drw		sheet 3 of 4				

Copyright FCI. FCI

1 2 3 4 5 6 7 8

A B C D E F

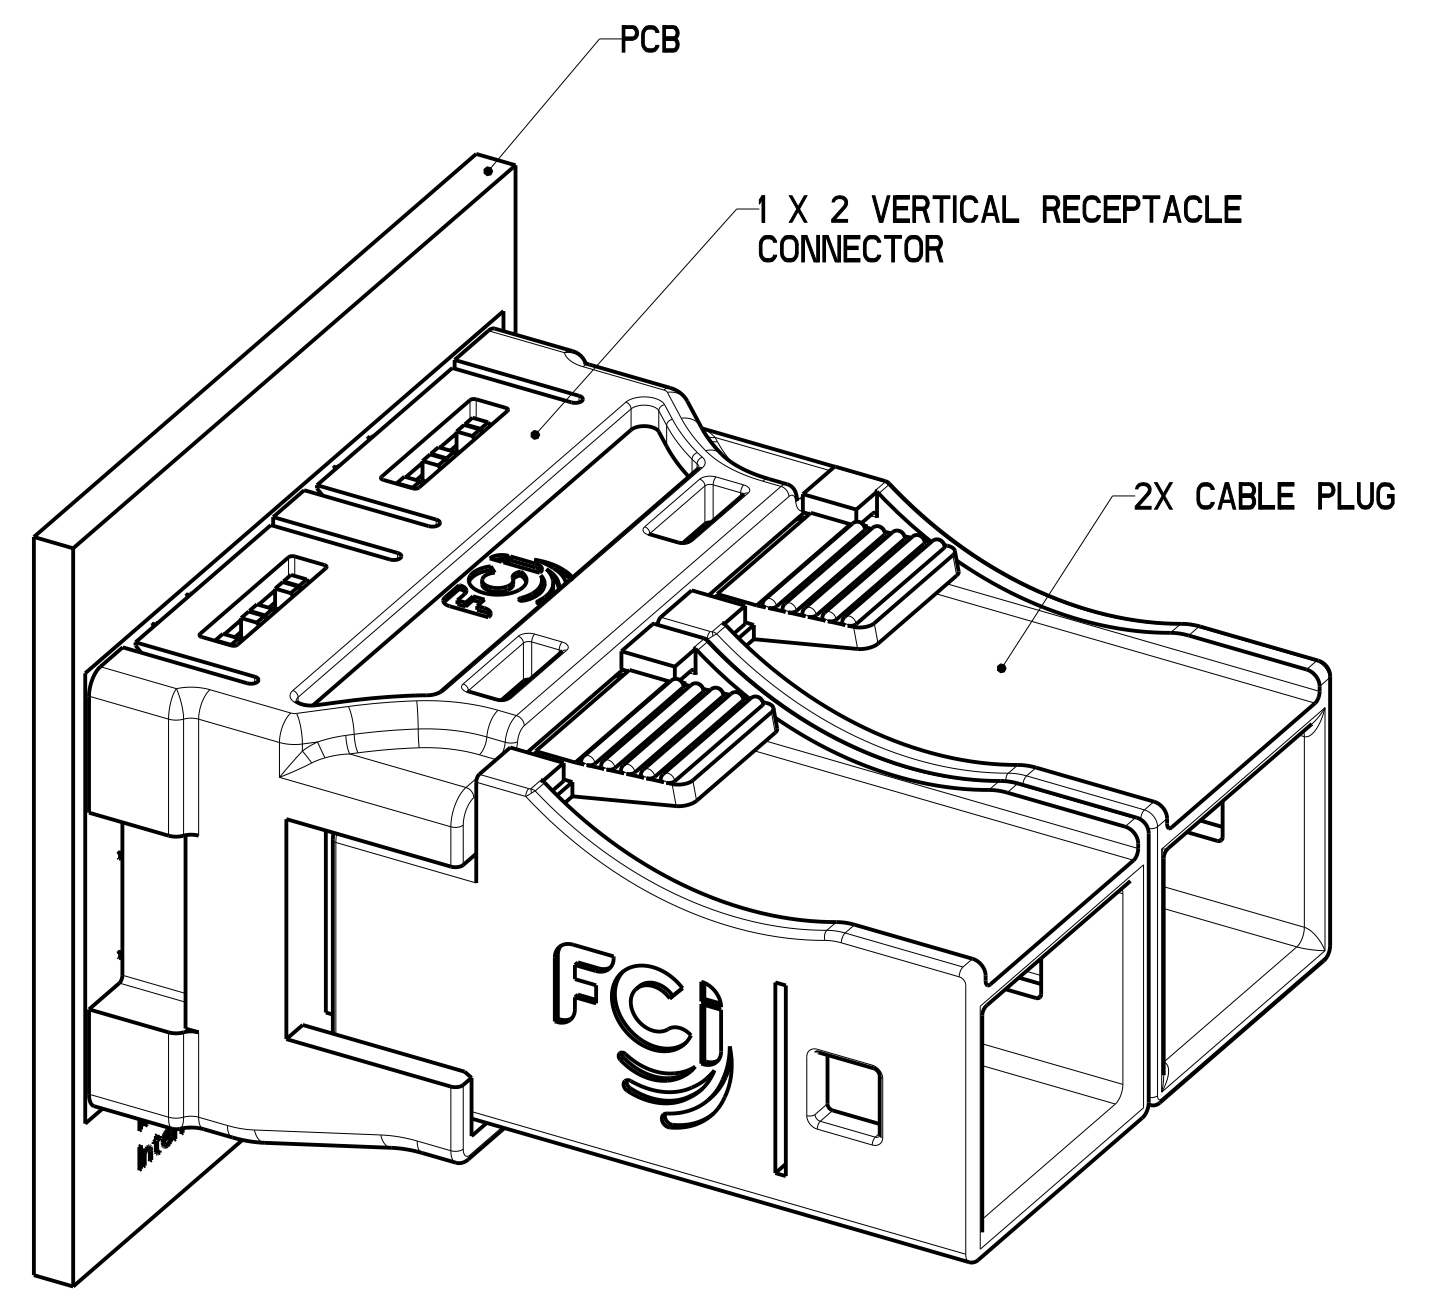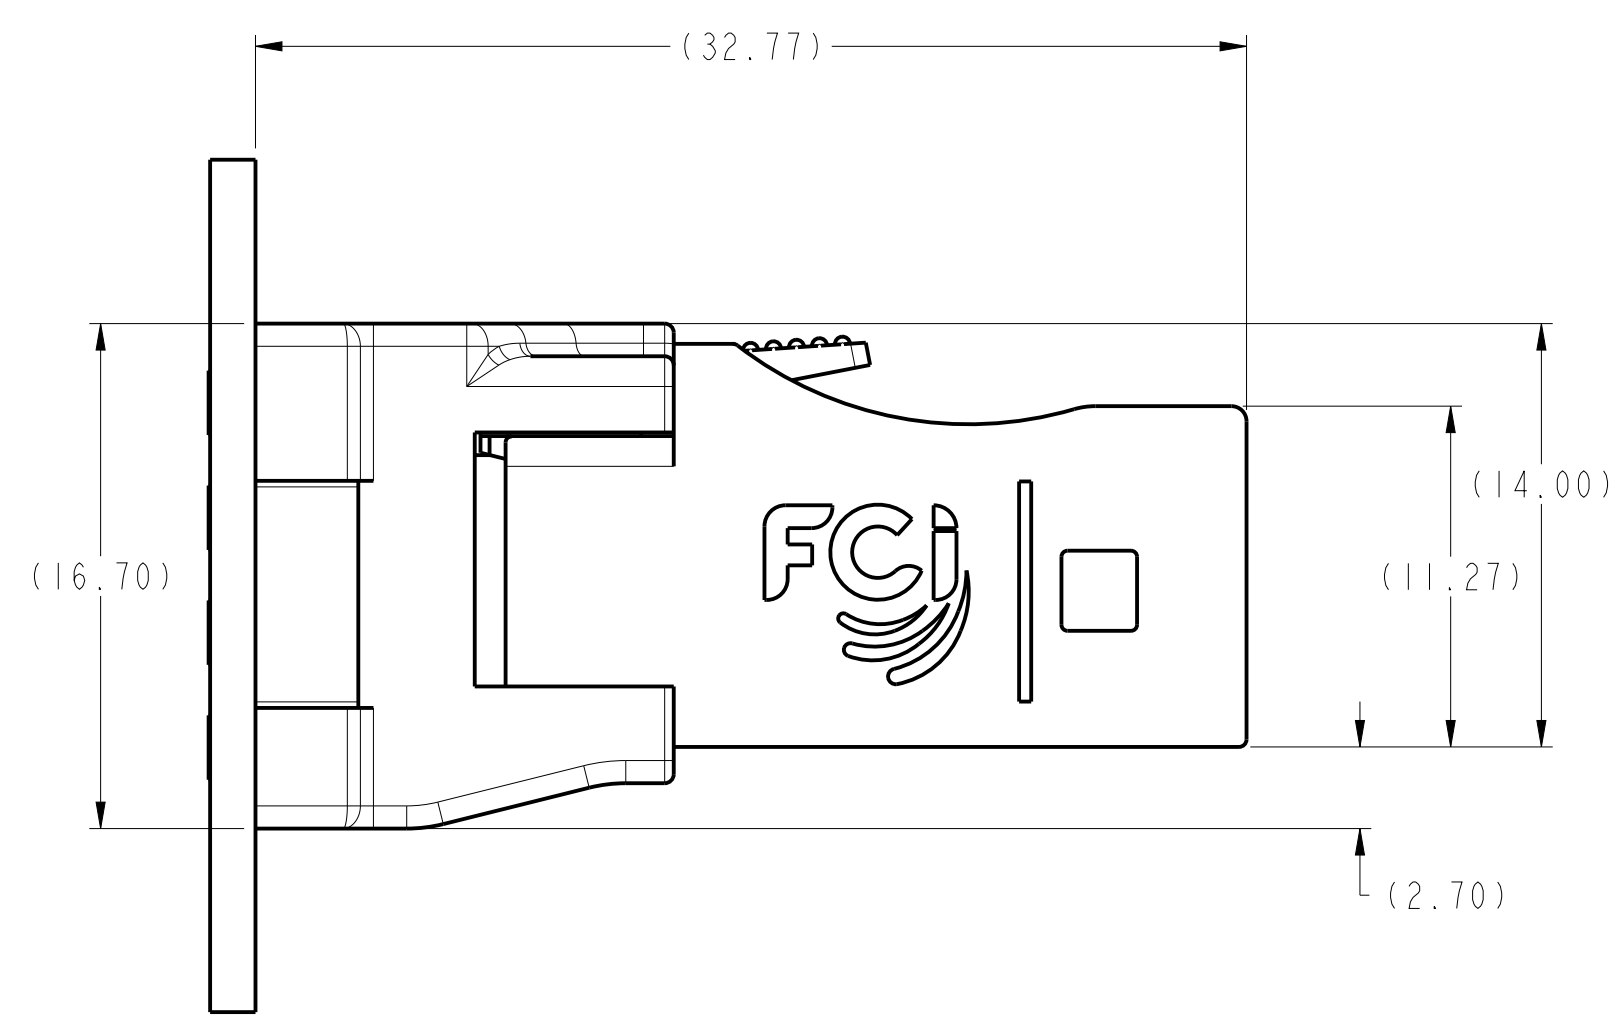

Copyright FCI. FCI

spec ref	-	dr	Deborah Ingram	2012/04/10	projection	MM	size	A2	scale	4:1		
tolerance std	ASME Y14.5	eng	Jacklin Zou	2015/12/09			ecn no	ELX-DG-22744-1				
	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	Zhen Luo	2015/12/22			rel level	Released				
		appr	Pei-Ming Zheng	2015/12/23			product family					
surface	✓	linear	0.X	±0.25		INTERNAL VERTICAL ASSEMBLY Mini-SAS HD VERTICAL ASSEMBLY	dwg no 10120667	rev F	www.fci.com		Product - Customer Drw	sheet 4 of 4
			0.XX	±0.13					cat. no.			
		angular	0°	±1/2°								