

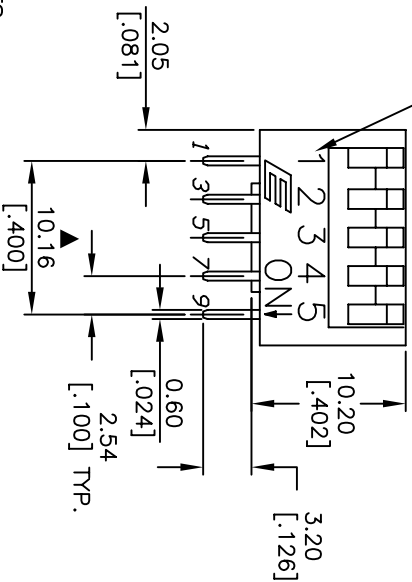


POS. 1 DESIGNATE
PIN #1 LOCATION

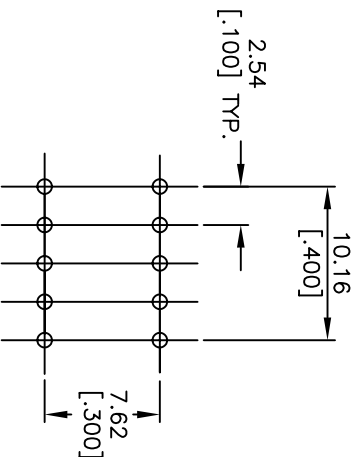


TOP TAPE
SEALED

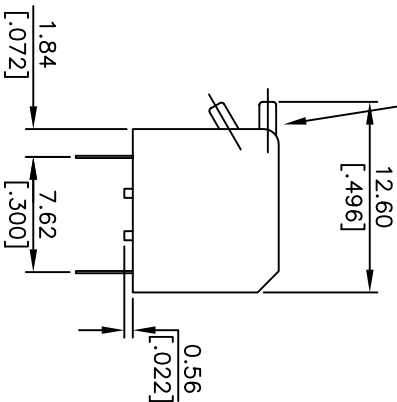

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.
5. MATERIAL: (TERMINALS/CONTACTS):
PHOSPHOR BRONZE w/Gold Plate over
Nickel Plate
6. INSULATION RESISTANCE:
100Mega-OHMS min @500VDC
7. CONTACT RESISTANCE (INITIAL):
50mILLI-OHMS @2-4VDC @100mA
8. OPERATING FORCE: 1000gf max.
9. TRAVEL: 2mm typical
- ▲10. SWITCHES SUPPLIED IN DISPENSING TUBES/32 PCS
WITH ALL POLES IN THE "OFF" POSITION.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT



CONTACT CONFIGURATION

* (Pos. 1 Denotes Pin No. 1)

RECOMMEND P.C.B. LAYOUT -FOR 5 Pos.

A	17195	RELEASED FOR PRODUCTION	4/17/07	TN
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
KAP1105ET				
SCALE	DATE	DR	DWG	REV
2:1	4/17/07	TN	N411095	A



THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED