



Twist Locks, Standard

Features

- Fast, Economical Way to Securely Position and Hold Wire, Cable, or Tubing
- A Single Twist Locks or Unlocks the Bundle for Ease of Use
- Tough, Resilient, Natural Nylon 6/6 Molded Construction

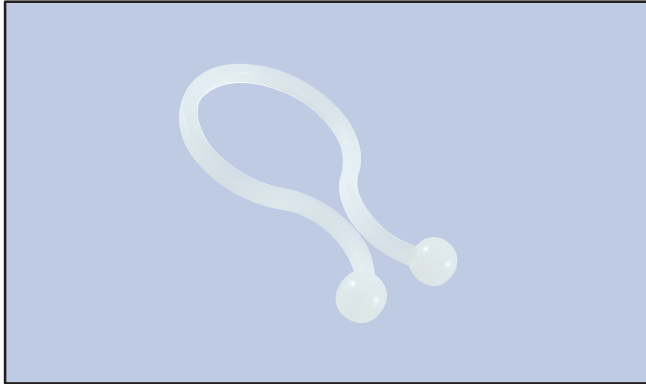

TL-01

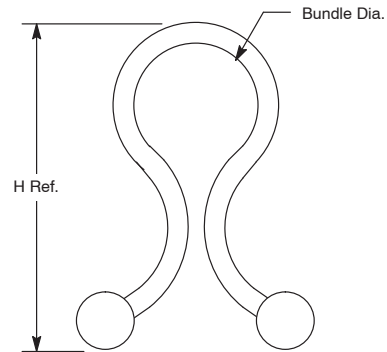


Standard Twist Locks

| | NTE Type No. | Description | H Ref. | Bundle Dia. | | Qty. per Bag | Diag No. |
|-----|--------------|-------------|--------------|--------------|--------------|--------------|----------|
| | | | | Min | Max | | |
| NEW | 04-TL19 | 3/8" Lock | 1.080 / 27.4 | .300 / 7.62 | .400 / 10.2 | 25 | TL-01 |
| NEW | 04-TL29 | 1/2" Lock | 1.200 / 30.5 | .400 / 10.2 | .500 / 12.7 | 25 | TL-01 |
| NEW | 04-TL39 | 5/8" Lock | 1.260 / 32.0 | .550 / 13.9 | .650 / 16.5 | 25 | TL-01 |
| NEW | 04-TL49 | 3/4" Lock | 1.550 / 39.4 | .700 / 17.8 | .800 / 20.3 | 25 | TL-01 |
| NEW | 04-TL59 | 1 1/8" Lock | 2.170 / 55.1 | 1.200 / 30.5 | 1.300 / 33.0 | 25 | TL-01 |
| NEW | 04-TL69 | 1 3/8" Lock | 2.670 / 67.8 | 1.450 / 36.8 | 1.550 / 39.4 | 25 | TL-01 |
| NEW | 04-TL79 | 1 1/2" Lock | 2.930 / 74.4 | 1.550 / 39.4 | 1.650 / 41.9 | 25 | TL-01 |


Twist Locks, Supports w/Adhesive

Features

- Twist Lock Supports on an Adhesive Base
- Fast, Economical Way to Securely Position and Hold Wire, Cable, or Tubing
- A Single Twist Locks or Unlocks the Bundle for Ease of Use
- Tough, Resilient, Natural Nylon 6/6 Molded Construction

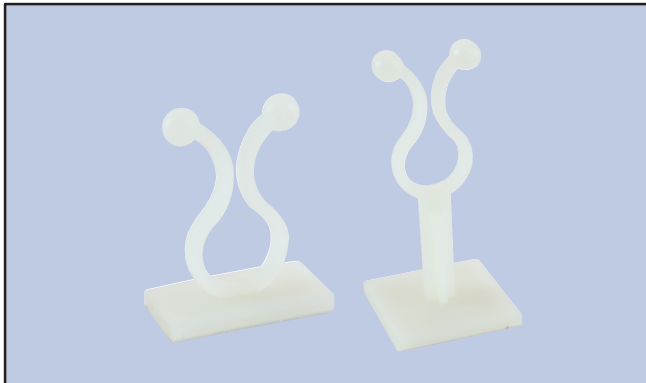

TL-02

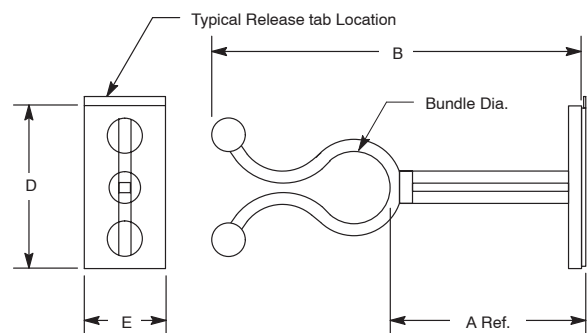

Twist Lock Supports on Adhesive Base

| | NTE Type No. | Description | A Ref. | B | D | E | Max Bundle Dia. | Qty. per Bag | Diag No. |
|-----|--------------|-------------|---------------|---------------|--------------|--------------|-----------------|--------------|----------|
| NEW | 04-TLS19 | .450 Lock | 1.070 / 27.18 | 2.149 / 54.58 | 1.000 / 25.4 | 1.000 / 25.4 | .450 / 11.43 | 10 | TL-02 |
| NEW | 04-TLS29 | .450 Lock | .190 / 4.83 | 1.230 / 31.24 | 1.000 / 25.4 | .520 / 13.21 | .450 / 11.43 | 10 | TL-02 |
| NEW | 04-TLS39 | .580 Lock | .190 / 4.83 | 1.400 / 35.56 | .870 / 22.1 | .520 / 13.21 | .580 / 14.73 | 10 | TL-02 |