




Mating face



B-coding
Mating face
acc. to IEC 61076-2-101



Applications / Advantages

03


- B-coding for field bus systems e.g. Profibus, DeviceNet or CANopen
- For panel feed-through or PCB, straight version in IP20 or IP67, with or without assembled pigtail
- Available with crimp resp. HARAX® rapid termination
- Quick and easy assembly

Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

HARAX® Panel feed-through



21 03 341 1425

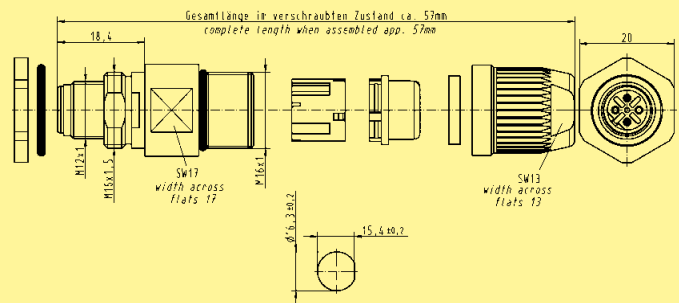

Male
2 poles and shielding, B-coding
0.25 - 0.34 mm² / AWG 24 - 22

Cable diameter: 7 - 8.8 mm

Panel thickness
min. 2.5 mm
max. 4.5 mm