

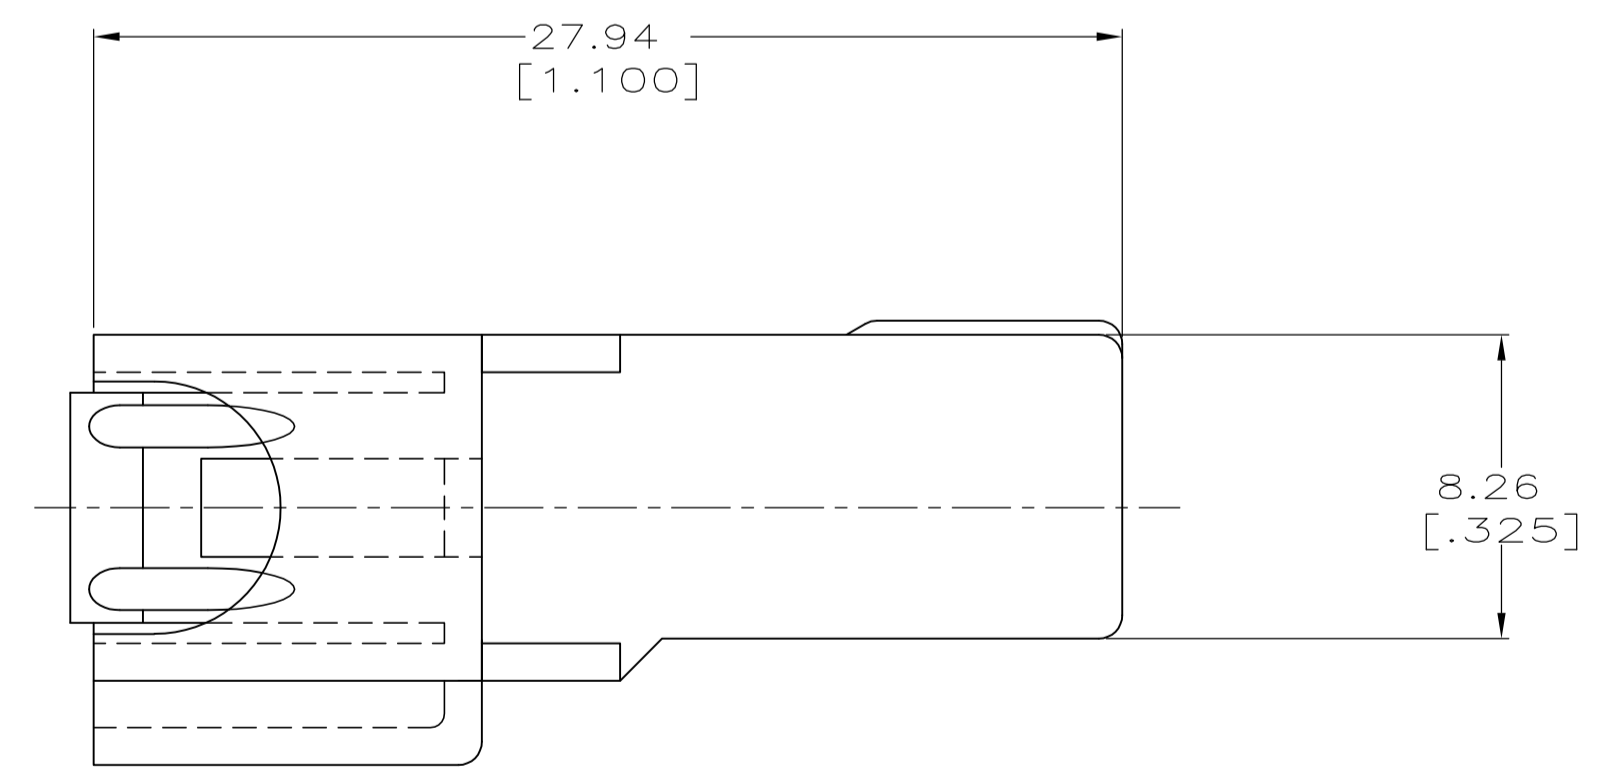
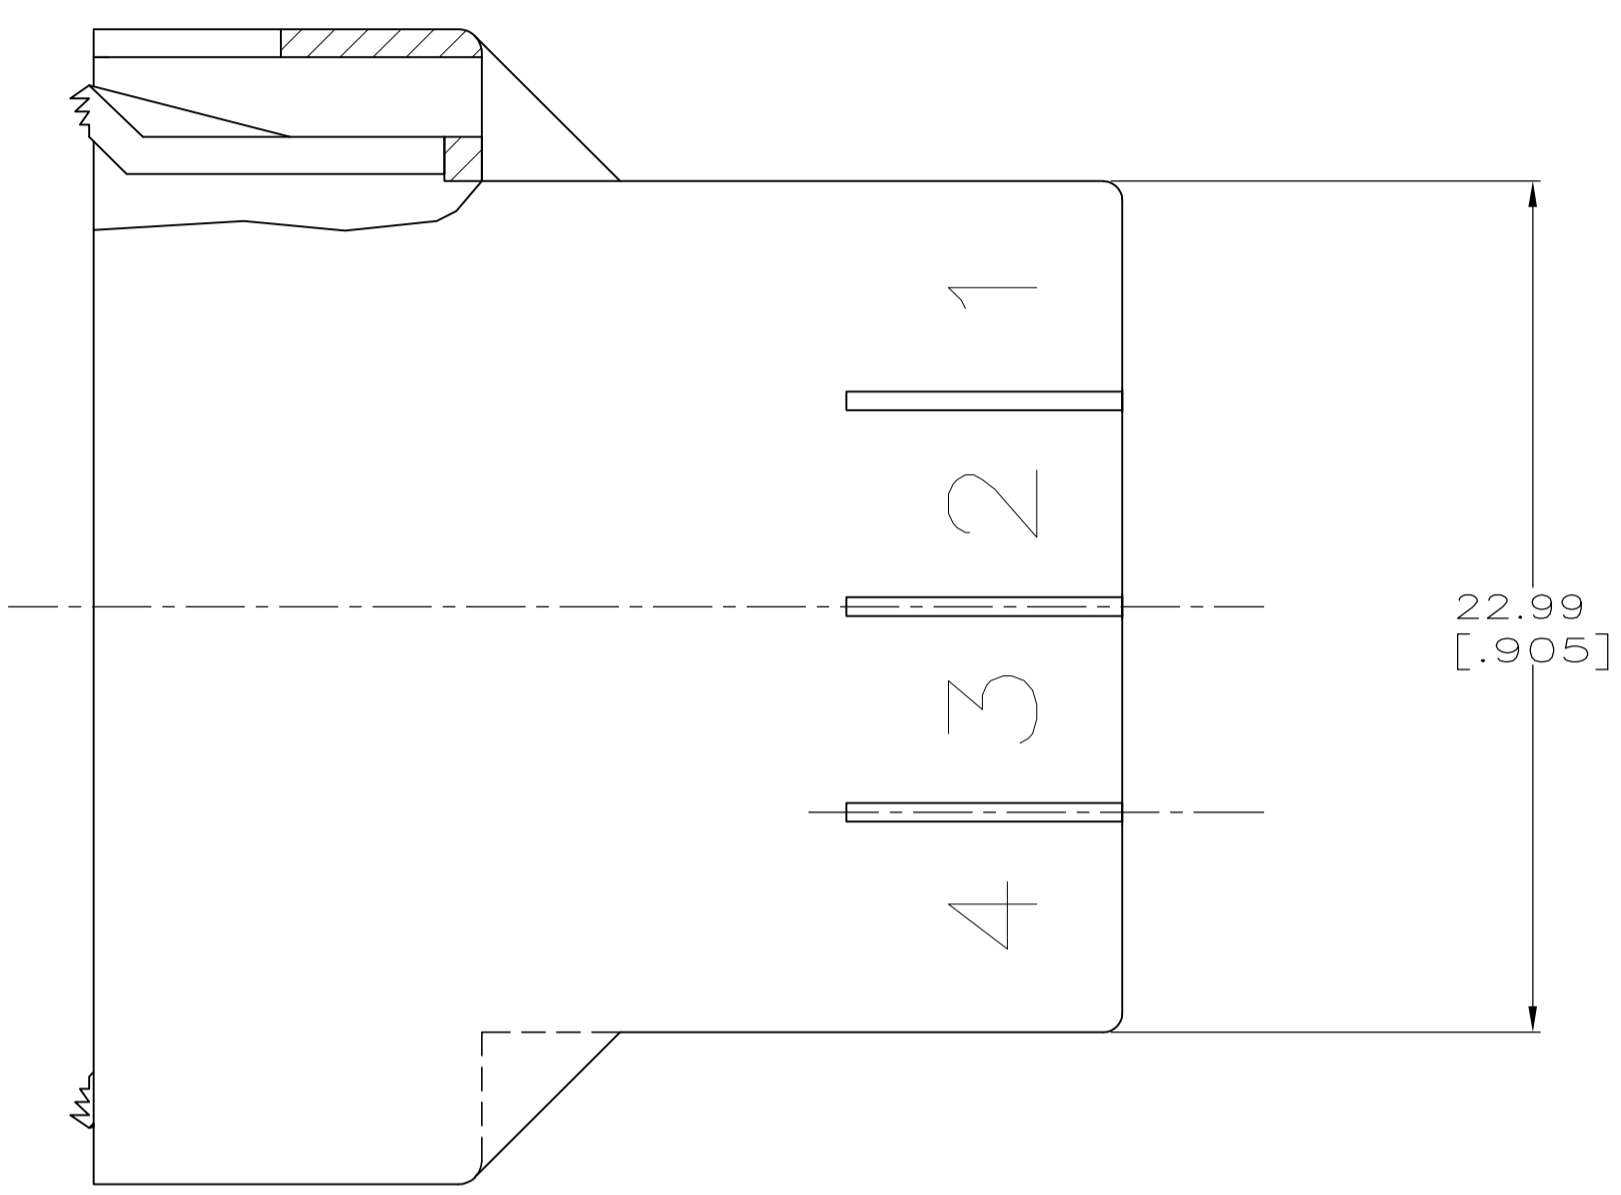
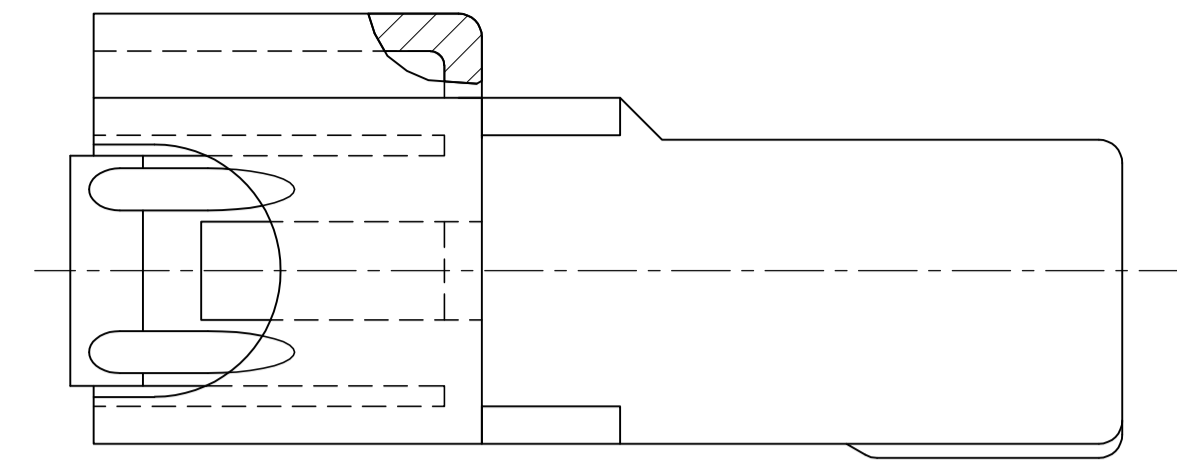
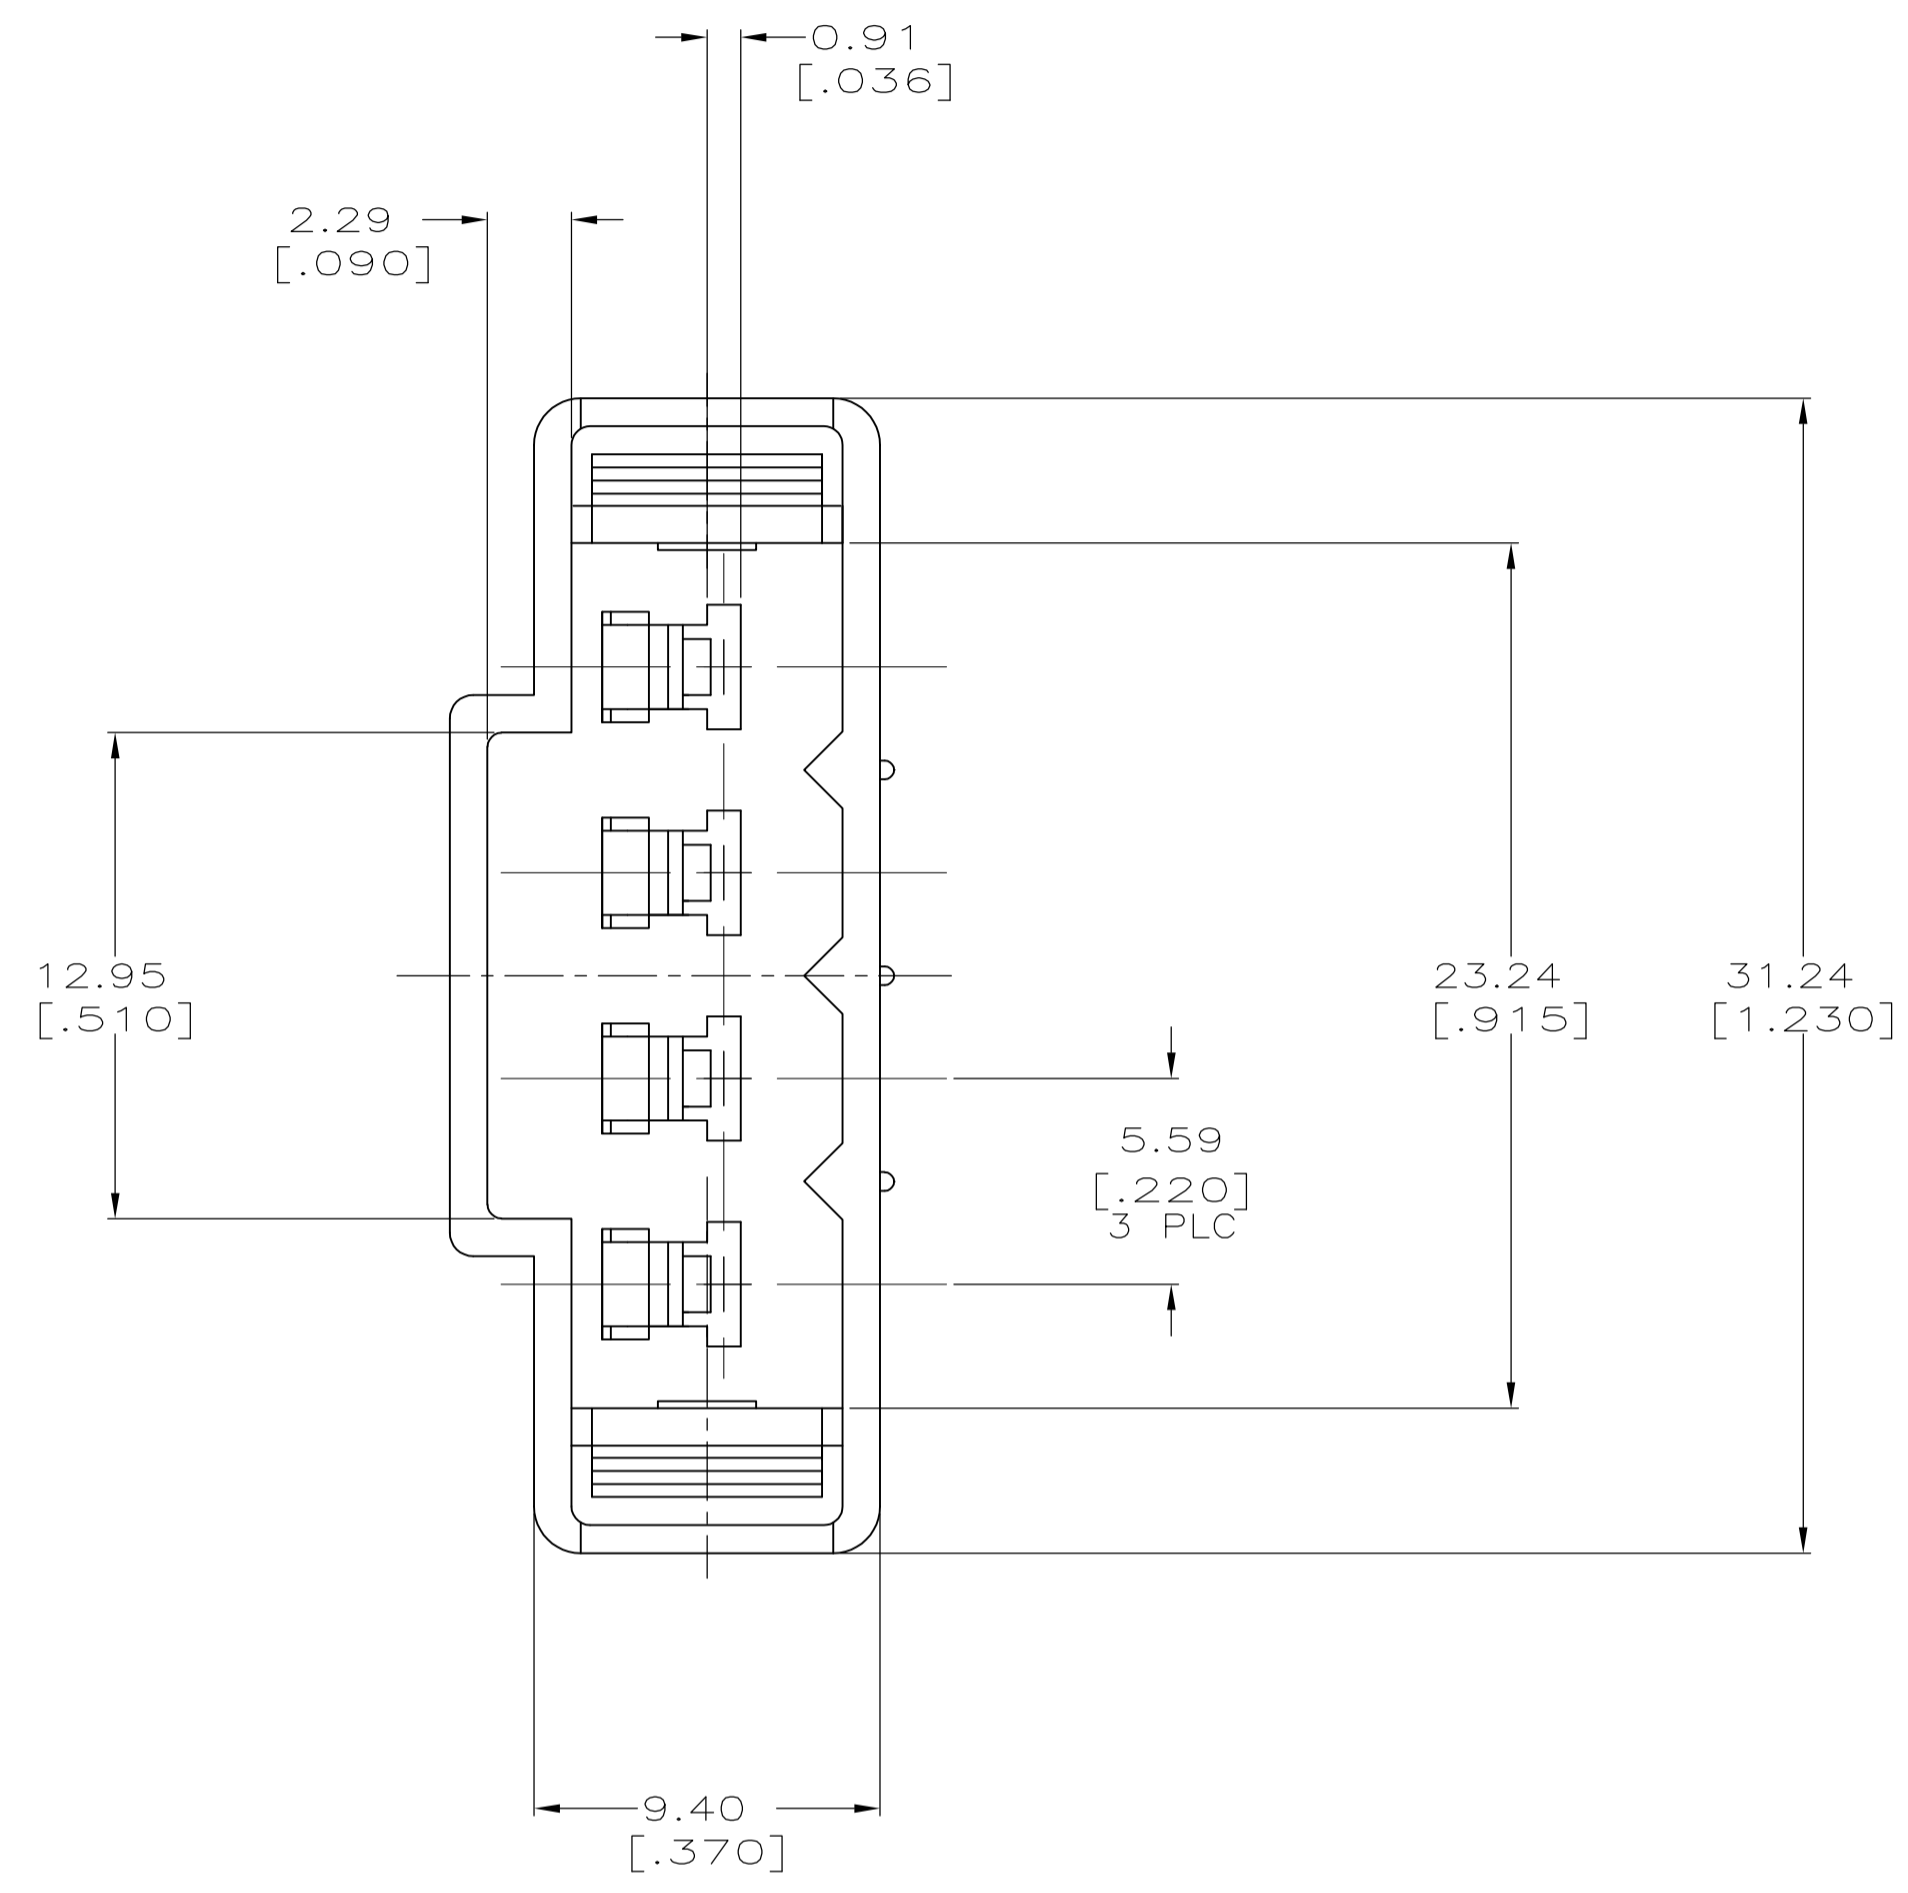


| LOC | | DIST | | REVISIONS | | | | |
|-----|----|------|---|-----------|-----|---------------------------|-----------|-------|
| AF | 50 | P | F | ZONE | LTR | DESCRIPTION | DATE | APPD |
| | | | | | C | ADD -2 PER 0710-0088-95 | 26/FEB/95 | PF/JF |
| | | | | | C1 | REVISED PER ECO-09-024606 | 07NOV09 | AEG |

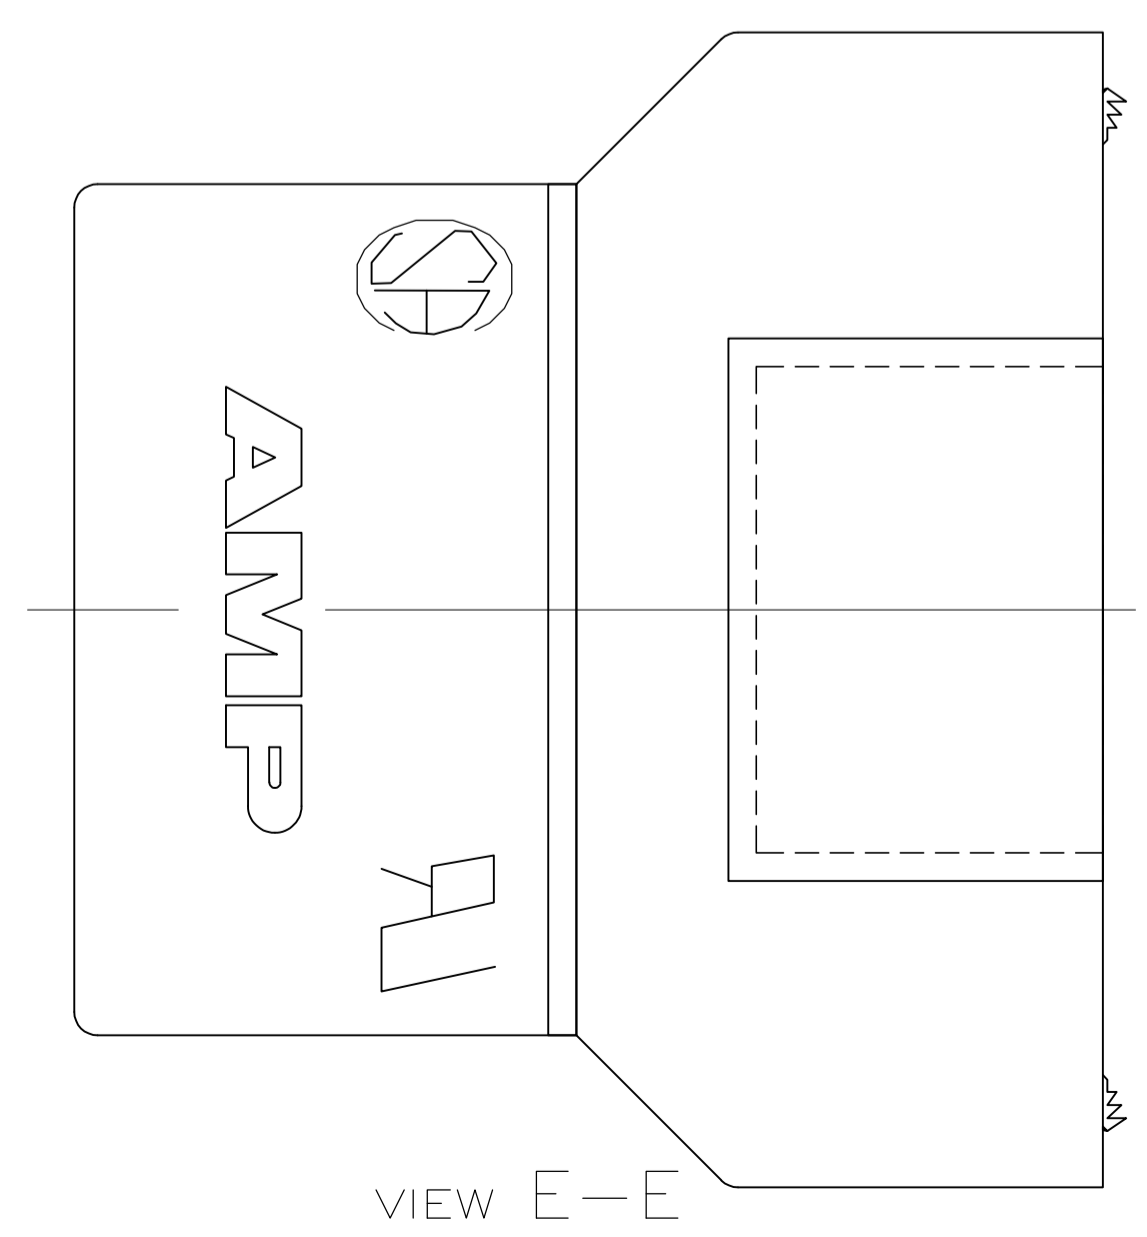

- 1 PART ACCEPTS BLADE CONTACT PART NO 63627-1.
- 2 PART MATES WITH PLUG PART NO 520991-1 & 521047-1.
- 3 THIS MATERIAL HAS A 130 C ELECTRICAL TEMPERATURE INDEX RATING BY U.L. AND 94 V-2 FLAMMABILITY RATING.
- 4 THIS MATERIAL HAS A 125 C ELECTRICAL TEMPERATURE INDEX RATING BY U.L. AND 94 V-2 FLAMMABILITY RATING.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

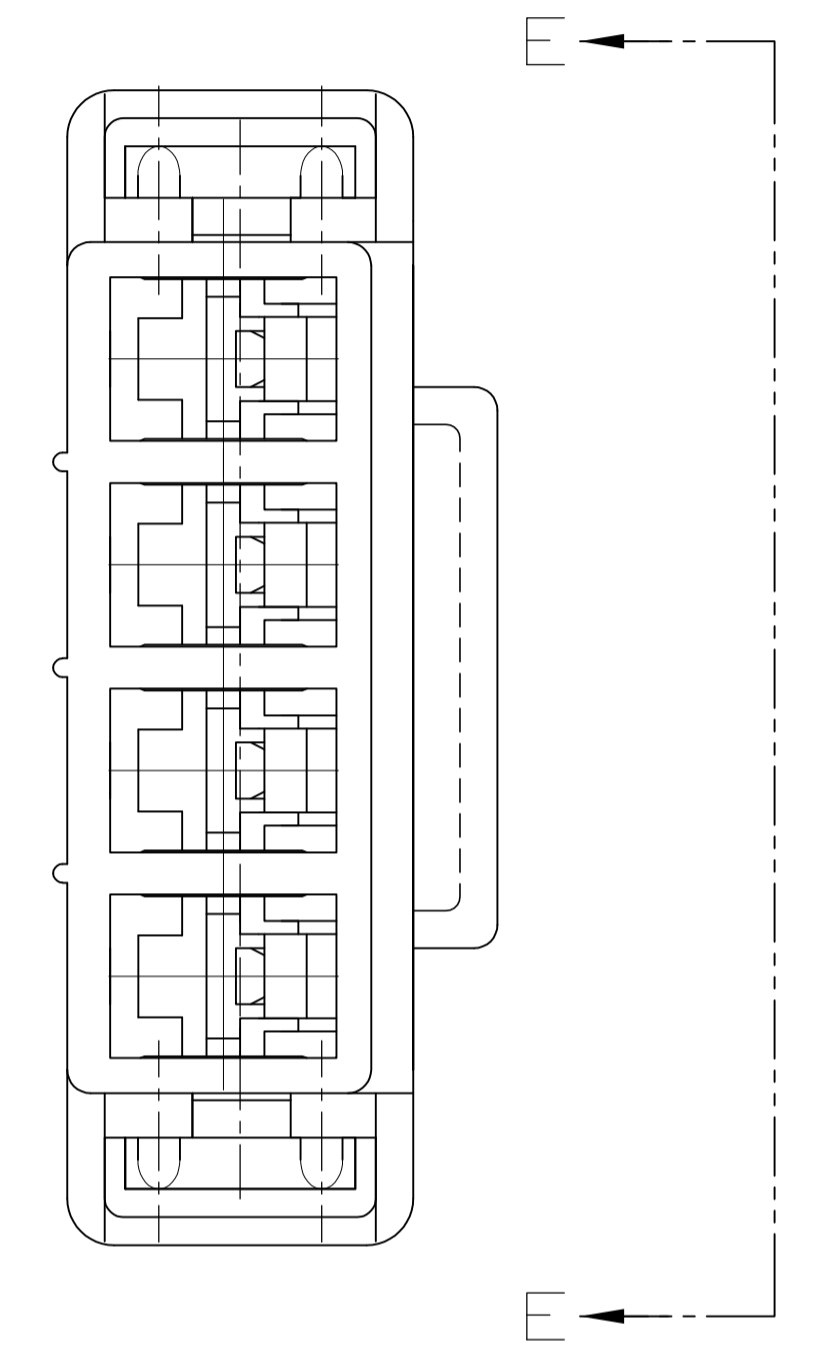

| | | | | |
|--|--|--|--------------------------------|---------------------------------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES: ON: 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± - | DR 11/8/93 P FORNEY CHK 11/8/93 JR RUTH APPD 11/8/93 D DECKER APPD 11/8/93 R KUZO | NATURAL BLACK COLOR | NYLON 6/6/4 PBT MATERIAL | 521048-2 521048-1 PART NO |
| SEE TABLE | PRODUCT SPEC | AMP AMP Incorporated Harrisburg, PA 17105-3608 NAME CAP, 4 CIRCUIT, 3.18 [.125] BLADE | | |
| FINISH | APPLICATION SPEC | | | |
| SEE TABLE | WEIGHT | SIZE D | CAGE CODE 00779 | DRAWING NO C-521048 |
| | | SCALE 5:1 | SHEET 10F 1 | |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.