



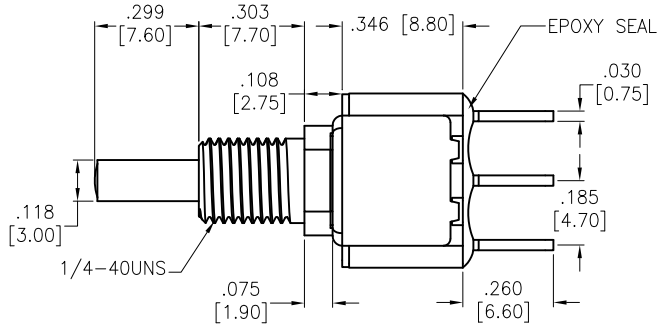


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

|     |       |             |        |      |
|-----|-------|-------------|--------|------|
| Rev | AWO # | Description | Date   | Appr |
| -   |       | RELEASED    | 3/4/21 |      |





HEX NUT

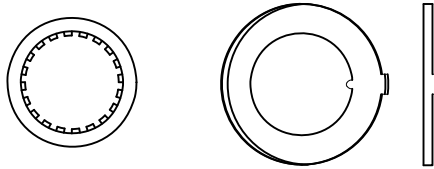

LOCK WASHER

ANTI ROTATIONAL WASHER

INCLUDED HARDWARE



SPECIFICATIONS:

Material:  
 Movable Contact: Copper Alloy, Silver Plated  
 Terminal: Copper Alloy, Silver Plated  
 Electrical:  
 Rating:  
 6 Amps with resistive load @ 125VAC or 28VDC  
 3 Amps with resistive load @ 250VAC  
 Contact resistance: 10 mΩ max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500V RMS @Sea level  
 Temperature Rating:  
 Operating temperature: -30°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



|   |        |        |        |
|---|--------|--------|--------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE INCHES [MM]<br>TOLERANCES: EXCEPT AS NOTED |        |        |        |
| INCHES  |        | HOLES  |        |
| .X  | ± .10  | Ø.X    | ± .10  |
| .XX   | ± .020 | Ø.XX   | ± .015 |
| .XXX  | ± .015 | Ø.XXX  | ± .010 |
| APPROVALS   |        | DATE   |        |
| DRAWN   | WX     | 3/4/21 |        |
| CHECKED   | AC     | 3/4/21 |        |
| APPROVED  |        |        |        |

**ADAM TECH** 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE  
**PUSHBUTTON SWITCH, ON-ON, SPDT  
 COPPER ALLOY SILVER PLATED, PCB TYPE**

|                  |                                      |              |
|------------------|--------------------------------------|--------------|
| SIZE<br><b>X</b> | PART NO.<br><b>SW-PB8-AA00A2QE-3</b> | REV.<br>-    |
| REF: S00198T     | SCALE: NTS                           | SHEET 1 OF 1 |