
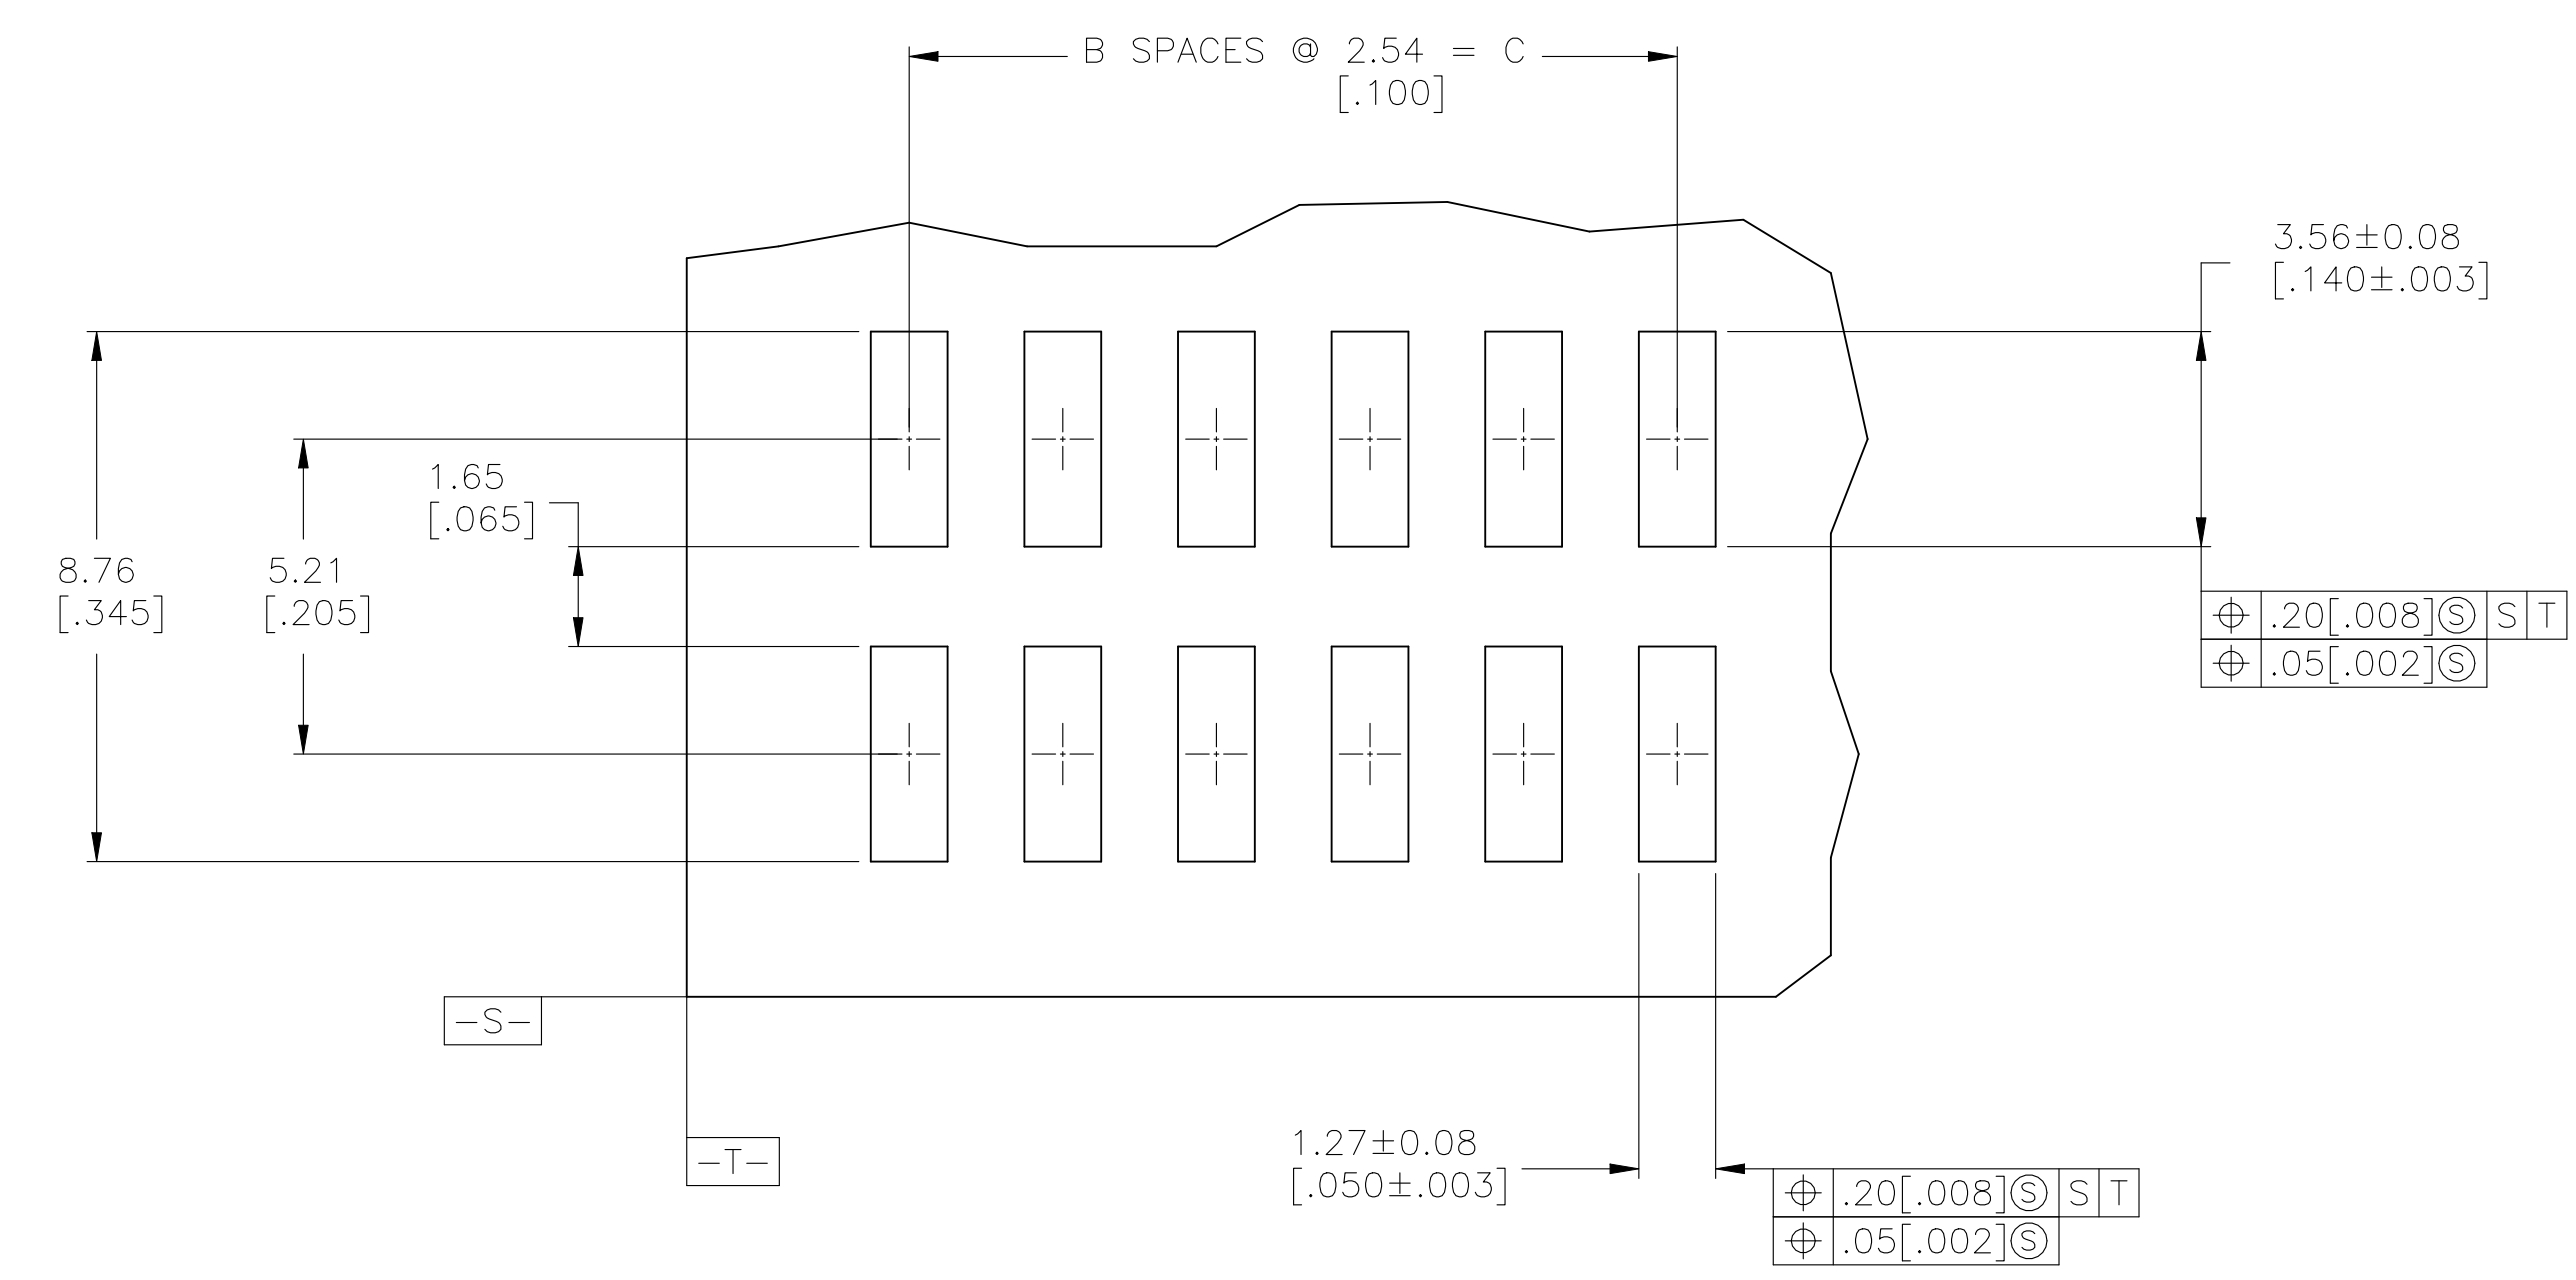
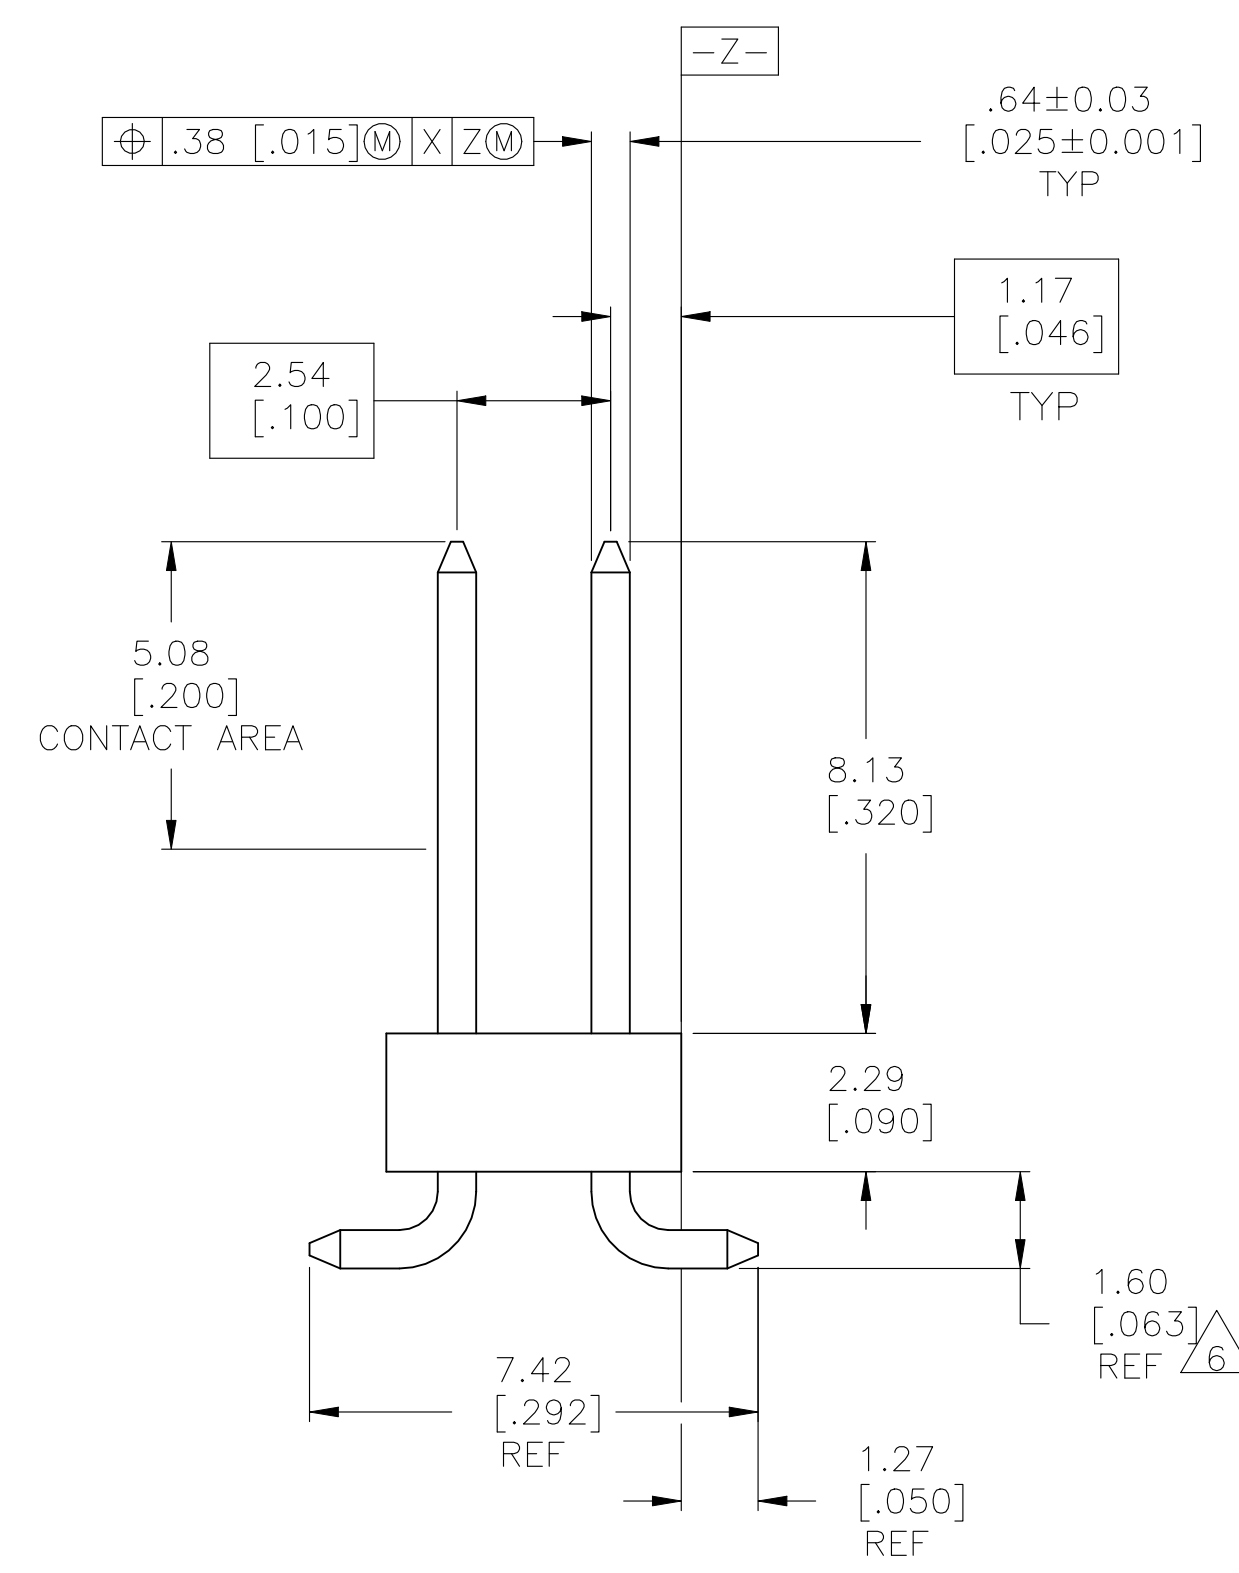
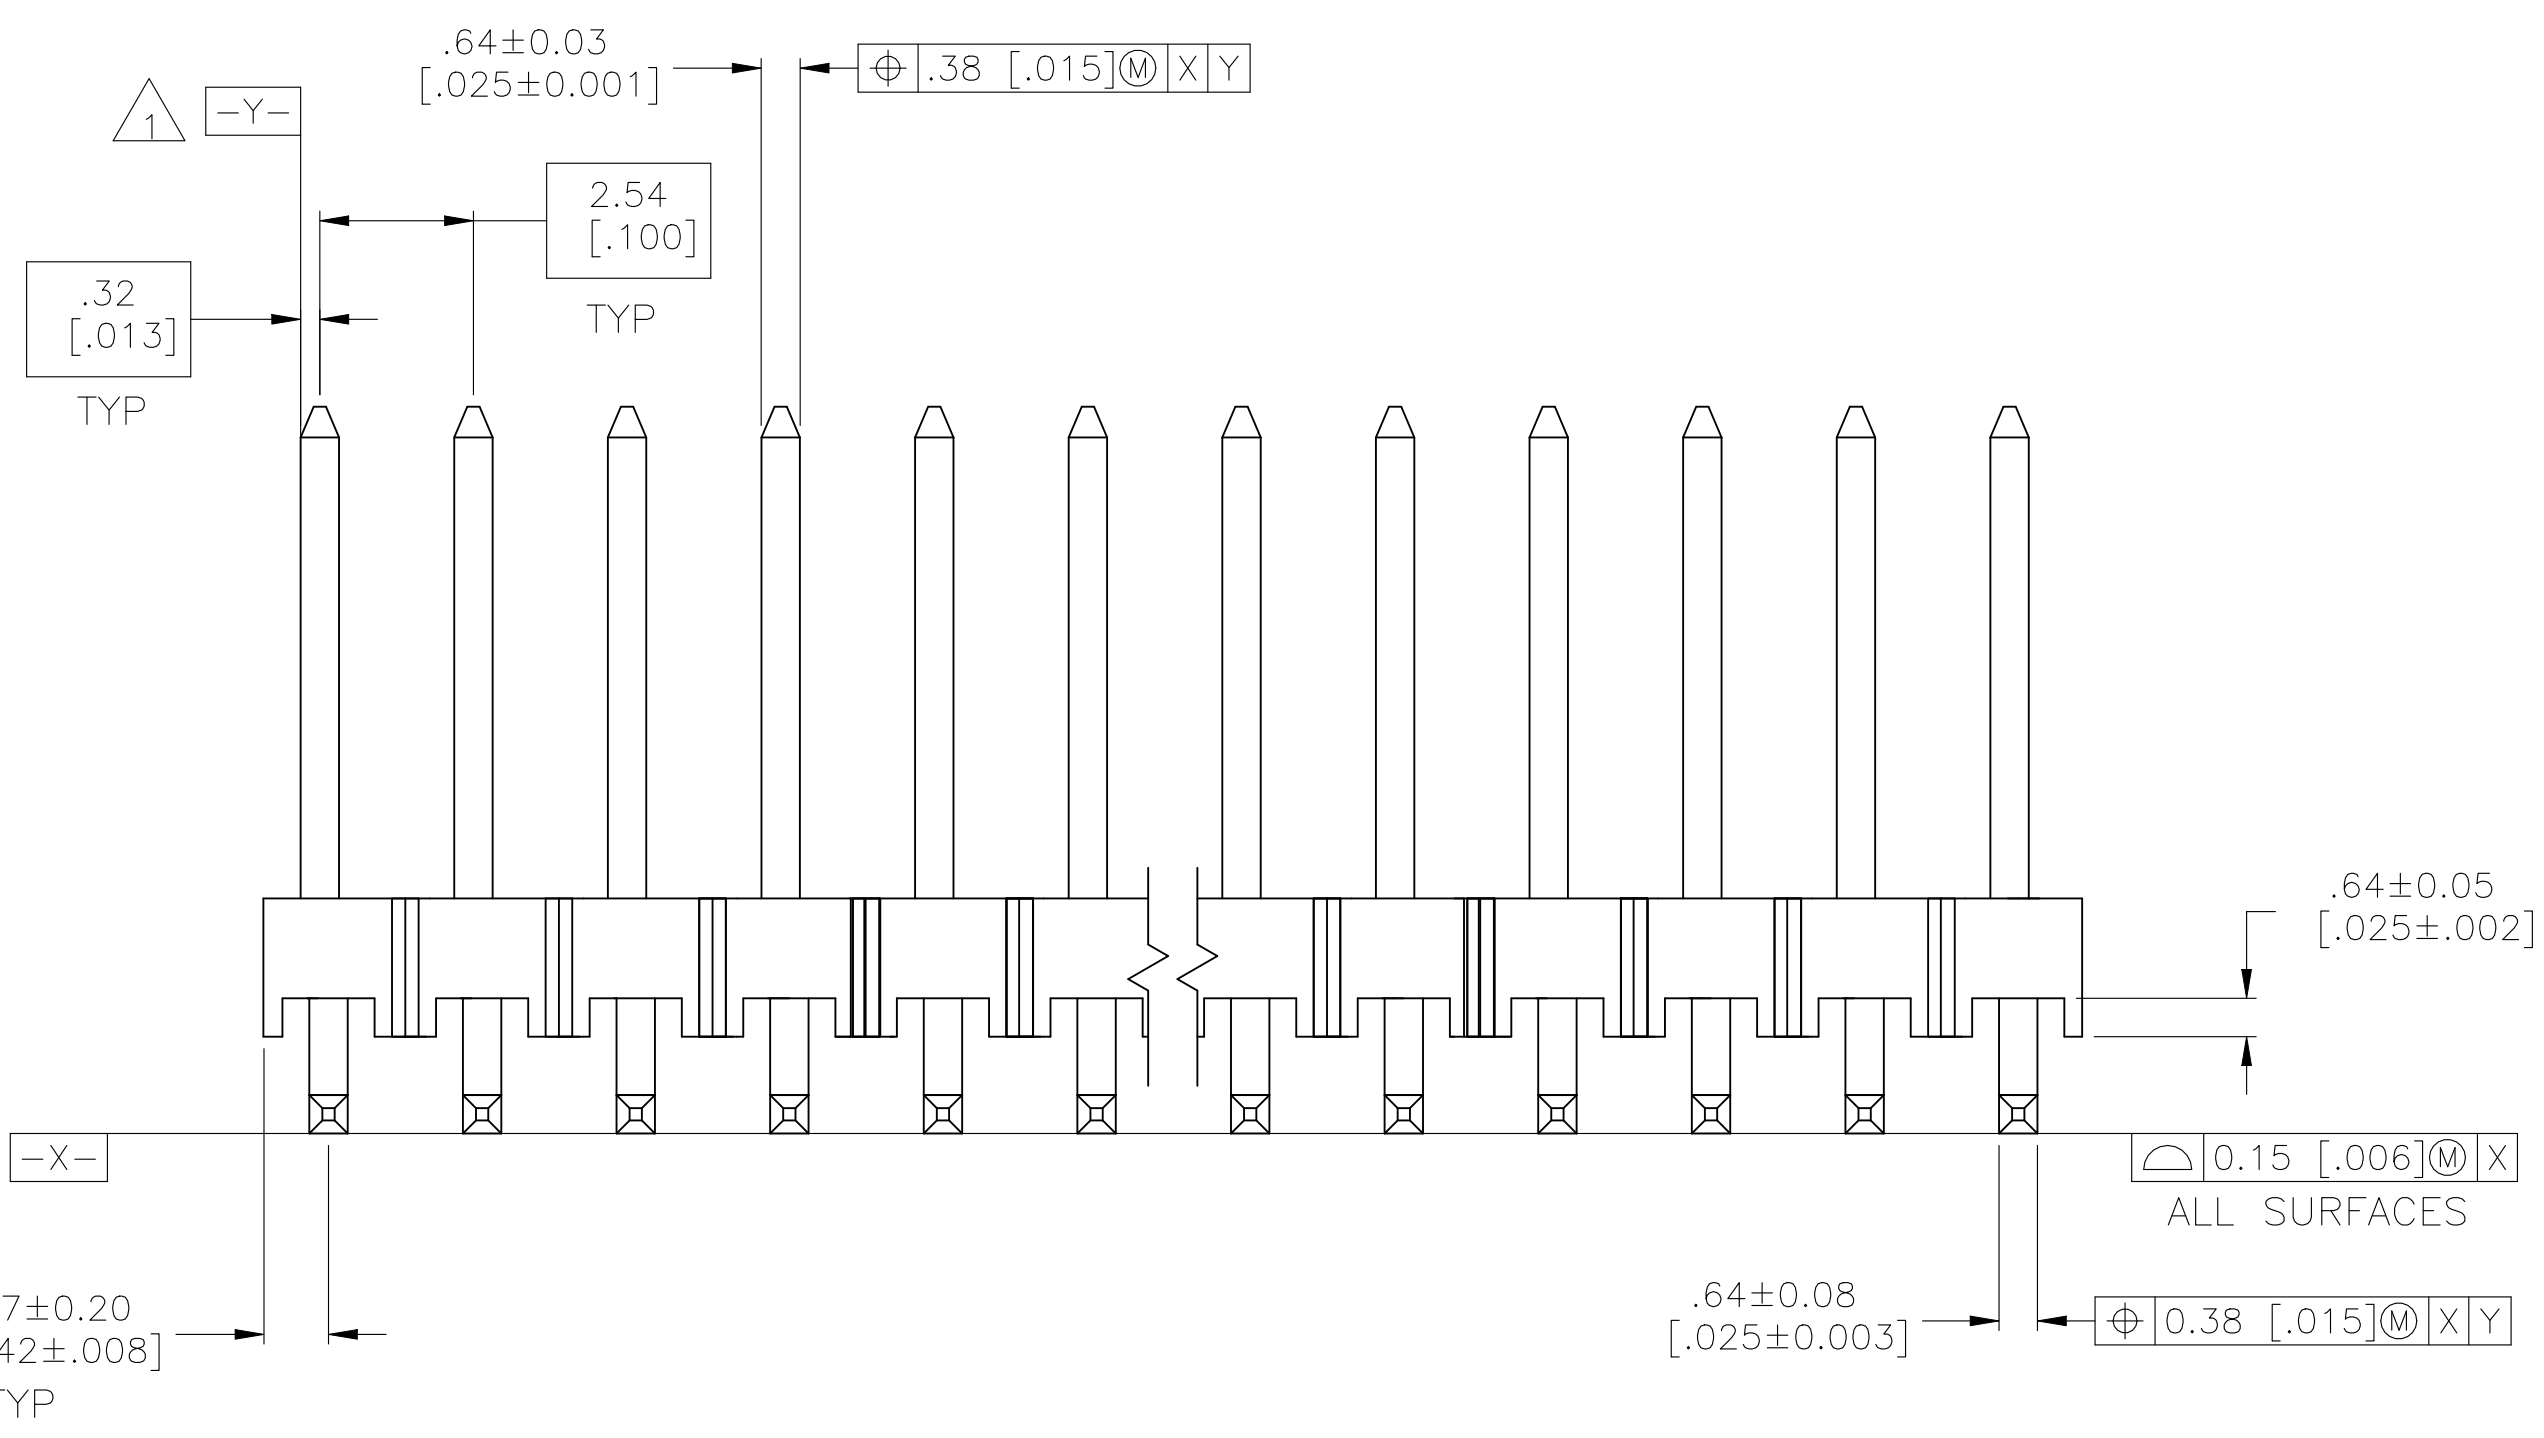


REVISIONS					
REV	DATE	BY	APPV	DESCRIPTION	DATE
P2	13JUL2022	RK	MF	REVISED PER ECN-22-164229	

- △6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- △7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- △1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- △2 THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED.
- △3 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD OVER 0.00127[.000050] NICKEL ENTIRE POST.
- △4 HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY.
- △5 0.00254-0.00508[.000100-.000200] MATTE TIN OVER 0.00127[.000050] NICKEL ENTIRE POST.

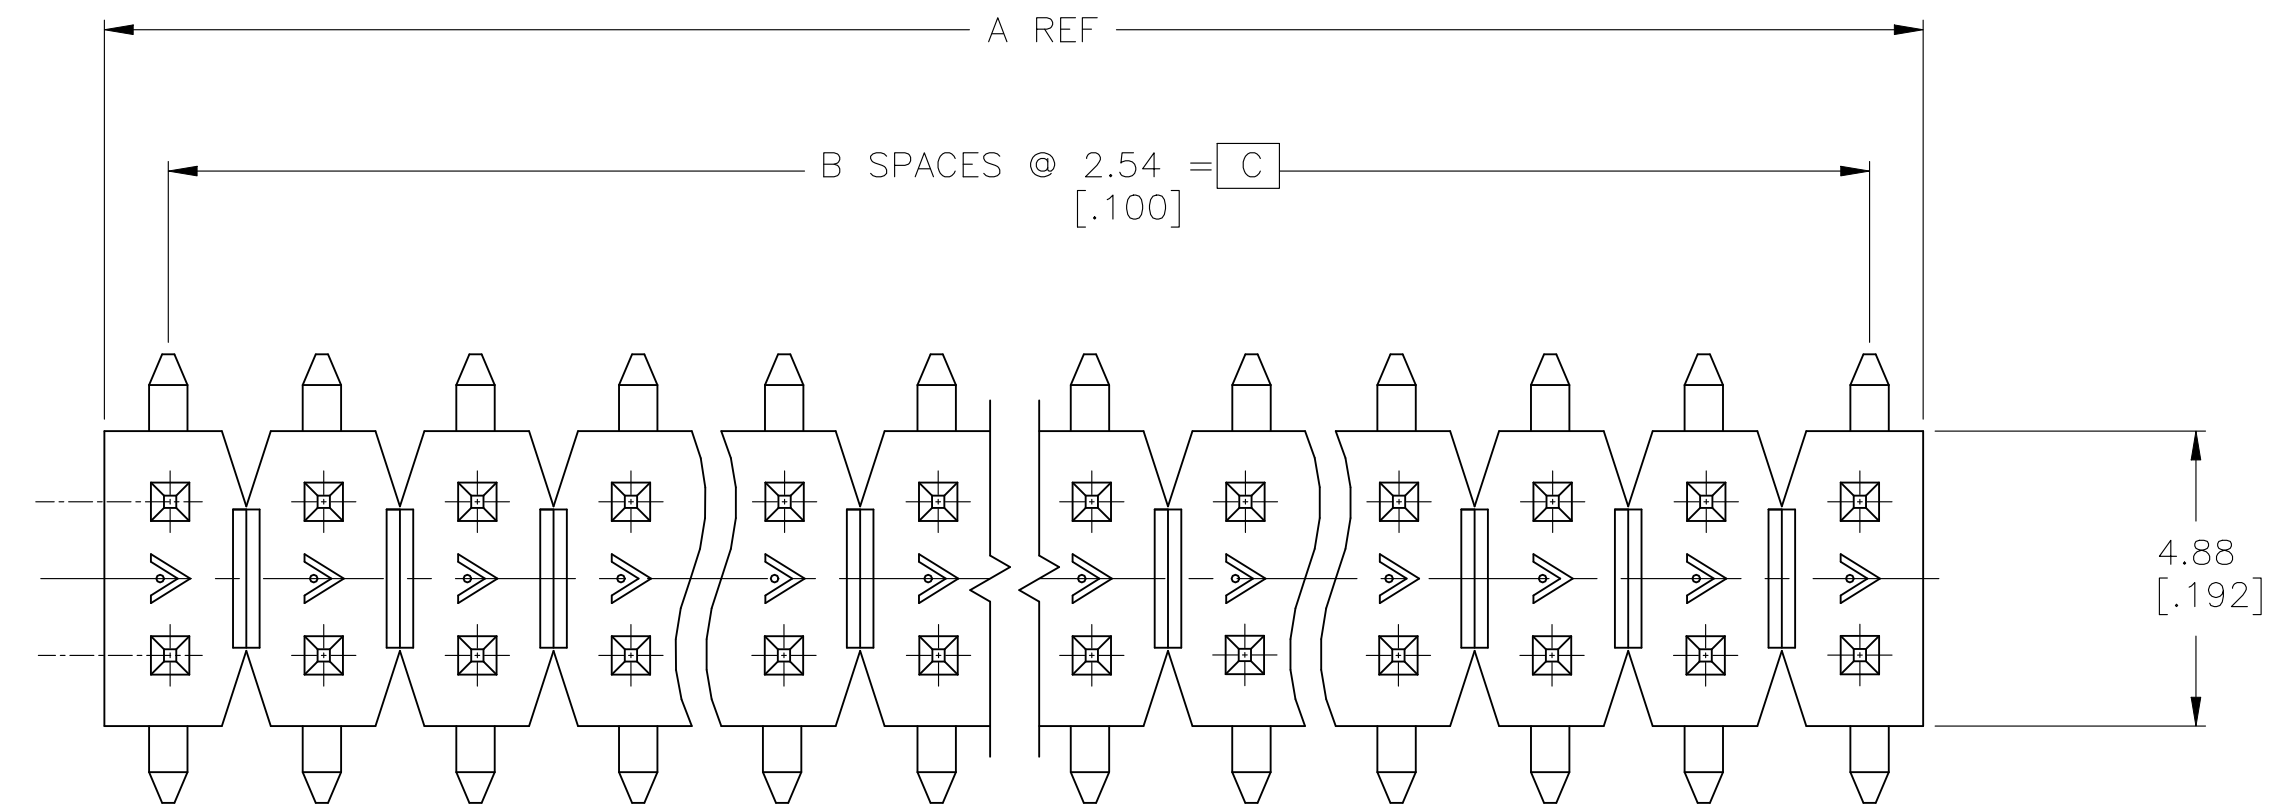

RECOMMENDED PCB LAYOUT FOR USE WITH .008 THICK STENCIL

REV	DATE	BY	APPV	DESCRIPTION	DATE
△5	60.96 [2.400]	24		63.09 [2.484]	50
△5	35.56 [1.400]	14		37.69 [1.484]	30
△5	33.02 [1.300]	13		35.15 [1.384]	28
△5	30.48 [1.200]	12		32.61 [1.284]	26
△5	27.94 [1.100]	11		30.07 [1.184]	24
△5	25.40 [1.000]	10		27.53 [1.084]	22
△5	22.86 [.900]	9		24.99 [.984]	20
△5	20.32 [.800]	8		22.45 [.884]	18
△5	17.78 [.700]	7		19.91 [.784]	16
△5	15.24 [.600]	6		17.37 [.684]	14
△5	12.70 [.500]	5		14.83 [.584]	12
△5	10.16 [.400]	4		12.29 [.484]	10
△5	7.62 [.300]	3		9.75 [.384]	8
△5	2.54 [.100]	1		4.67 [.184]	4
△5	15.24 [.600]	6		17.37 [.684]	14
△5	5.08 [.200]	2		7.21 [.284]	6
△3	35.56 [1.400]	14		37.69 [1.484]	30
△3	33.02 [1.300]	13		35.15 [1.384]	28
△3	30.48 [1.200]	12		32.61 [1.284]	26
△3	27.94 [1.100]	11		30.07 [1.184]	24
△3	25.40 [1.000]	10		27.53 [1.084]	22
△3	22.86 [.900]	9		24.99 [.984]	20
△3	20.32 [.800]	8		22.45 [.884]	18
△3	17.78 [.700]	7		19.91 [.784]	16
△3	15.24 [.600]	6		17.37 [.684]	14
△3	12.70 [.500]	5		14.83 [.584]	12
△3	10.16 [.400]	4		12.29 [.484]	10
△3	7.62 [.300]	3		9.75 [.384]	8
△3	5.08 [.200]	2		7.21 [.284]	6
△3	2.54 [.100]	1		4.67 [.184]	4
PLATING	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± 0.13[.005]
4. PLC	± .005
ANGLES	± .005

MATERIAL: △4 FINISH: SEE TABLE

WEIGHT: --

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 146135

SCALE: 8:1

SHEET: 1 of 1

REV: P2

DIN: J. KNAUB 30SEP94

CHK: G. DUBNICZKI 30SEP94

APPV: G. DUBNICZKI 30SEP94

NAME: SMT HEADER ASSY MOD II, BREAKAWAY, VER DOUBLE ROW, .100 X.100 CL, .025 SQ. POST

TE Connectivity