
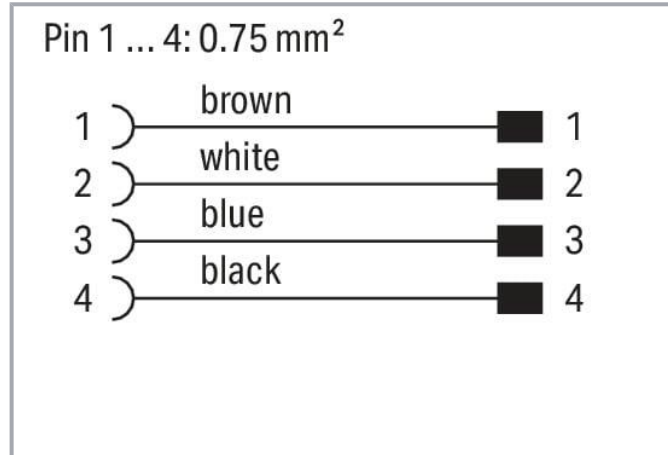
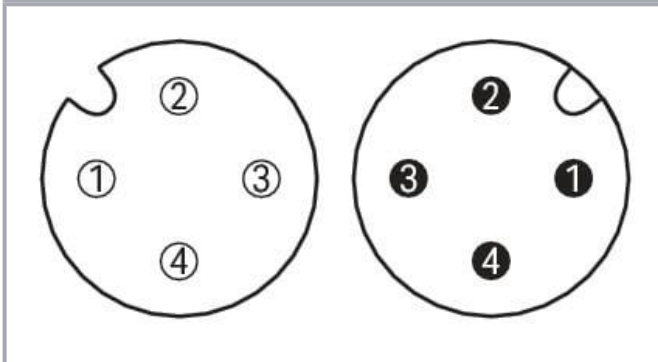


## Data sheet | Item number: 756-3106/040-010

Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 1 m

[www.wago.com/756-3106/040-010](http://www.wago.com/756-3106/040-010)

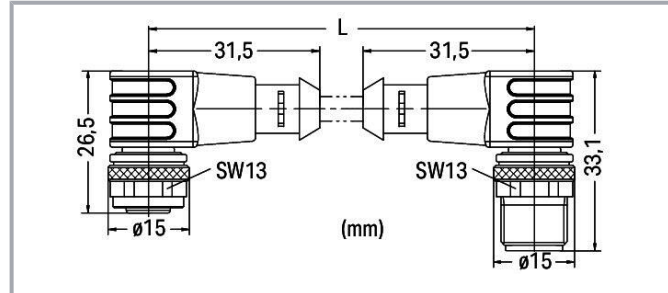

### Item description

#### Short description:

- PUR, halogen-free
- UL / CSA
- Suitable for drag chains
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

## Data

### Technical data

Connection type	M12 socket - M12 plug
Pole number	4
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Cable length	1 m
PLC manufacturer	WAGO
Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Insulation resistance	1000 MΩ
Conductor resistance	≤ 26 Ω/km

### Mechanical Data

Bending radius	10 x cable diameter (min.) for flexible application
Bending cycles	4 Mio.
Drag chain capability	yes
Sheathed cable diameter	6 ... 6.4 mm
Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>
Conductor configuration	Bare copper wire (40 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	90 g

### Environmental requirements

Ambient (operating) temperature (dynamic)	-30 ... +80 °C
Ambient (operating) temperature (static)	-30 ... +80 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1

Subject to changes. Please also observe the further product documentation!

**Commercial data**

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454127060
Customs tariff number	85444290900

**Environmental Product Compliance**

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	7630be5e-abdf-4440-a12b-61f86ff38b37
SCIP notification number (Belgium)	713c06e9-1b98-4577-ad03-e3313744dde6
SCIP notification number (Bulgaria)	eeff9482-1afc-46ad-9310-ca6d2fb4ddd2
SCIP notification number (Czech Republic)	4608dfcd-88f5-4eab-91d4-0ac8b6950b24
SCIP notification number (Denmark)	62b93164-12f6-436a-a298-6b0a2ccb2224
SCIP notification number (Finland)	b7371ebe-fa73-4069-b2c5-8dd9025e0920
SCIP notification number (France)	f185fb5e-7aa8-4ee9-bbfd-414320501bf1
SCIP notification number (Germany)	b535ceca-408b-4840-8087-d0b49f78904d
SCIP notification number (Hungary)	69677f55-b956-49bc-a245-bd2a6c15e050
SCIP notification number (Italy)	2bc06bd4-831d-43e3-9bad-1ba0c20af172
SCIP notification number (Netherlands)	cbd97647-cdb5-45e4-8d52-ccc0848ebd9a
SCIP notification number (Poland)	2e11ea21-40ec-4f42-b5a3-e42ce45962d9
SCIP notification number (Romania)	cd494766-e2dd-4b06-af24-047371d45f48
SCIP notification number (Sweden)	2e107482-0a1b-42b0-8480-6d76e1d2561a

**Approvals / Certificates****General approvals**

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Underwriters Laboratories Inc.

## Downloads

### Documentation

#### System Description

I/O-SYSTEM – SPEEDWAY, General Product Information	pdf 1.1 MB	Download
--	---------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-3106/040-010	URL	Download
WSCAD Universe 756-3106/040-010	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-3106/040-010 Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 1 m	URL	Download
---	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.