ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK
1	SXAM-01T-P0.6	XA CONNECTOR MALE CONTACT		
2	SXA-01T-P0.6	XA CONNECTOR FEMALE CONTACT		
3	UL1007, 22 AWG	BLACK		

Applicable Tooling
APPLICATOR

Applicable Housings

NO. OF CIRCUITS	HOUSING PART NO. FOR SXA CONTACT	HOUSING PART NO. WITH PANEL LOCKS FOR SXAM CONTACT	HOUSING PART NO. WITHOUT PANEL LOCKS FOR SXAM CONTACT
2	XAP-02V-1	XARR-02V	XARR-02VF
3	XAP-03V-1	XARR-03V	XARR-03VF
4	XAP-04V-1	XARR-04V	XARR-04VF
5	XAP-05V-1	XARR-05V	XARR-05VF
6	XAP-06V-1	XARR-06V	XARR-06VF
7	XAP-07V-1	XARR-07V	-
8	XAP-08V-1	XARR-08V	XARR-08VF
9	XAP-09V-1	XARR-09V	XARR-09VF
10	XAP-10V-1	XARR-10V	XARR-10VF
11	XAP-11V-1	XARR-11V	-
12	XAP-12V-1	XARR-12V	XARR-12VF
13	XAP-13V-1	XARR-13V	-
14	XAP-14V-1	XARR-14V	-
15	XAP-15V-1	XARR-15V	-

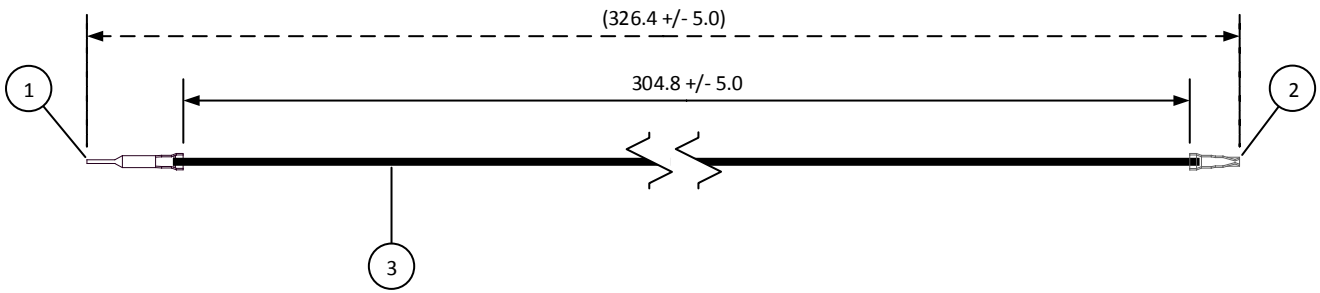

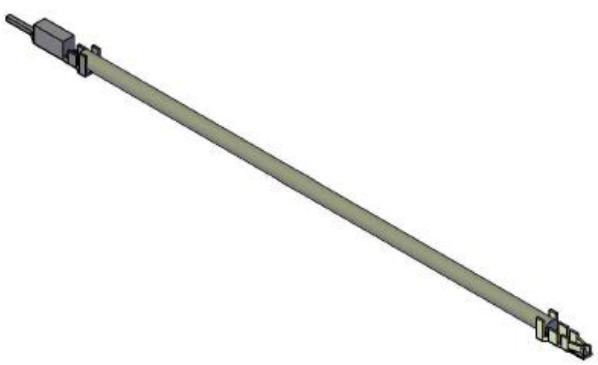

REV.	DESCRIPTION	DATE	BY

SCALE 1: 1	CUSTOMER NAME	CUSTOMER PART NO.
DIMENSIONS All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	DESCRIPTION 2.5 mm Pitch XA to XA Series Standard Leads - 12" Inside Length DOUBLE-END LEADS, M-F	
DRAWN BY STEVEN PILKINGTON	ASSEMBLY PART NO. ASXAMSXA22K305	
CHECKED BY JUSTIN BAKER	DRAWING NO. & REVISION GAM-078	REVISED 3/9/2016