


# Copperhead

## EBX Single Board Computer

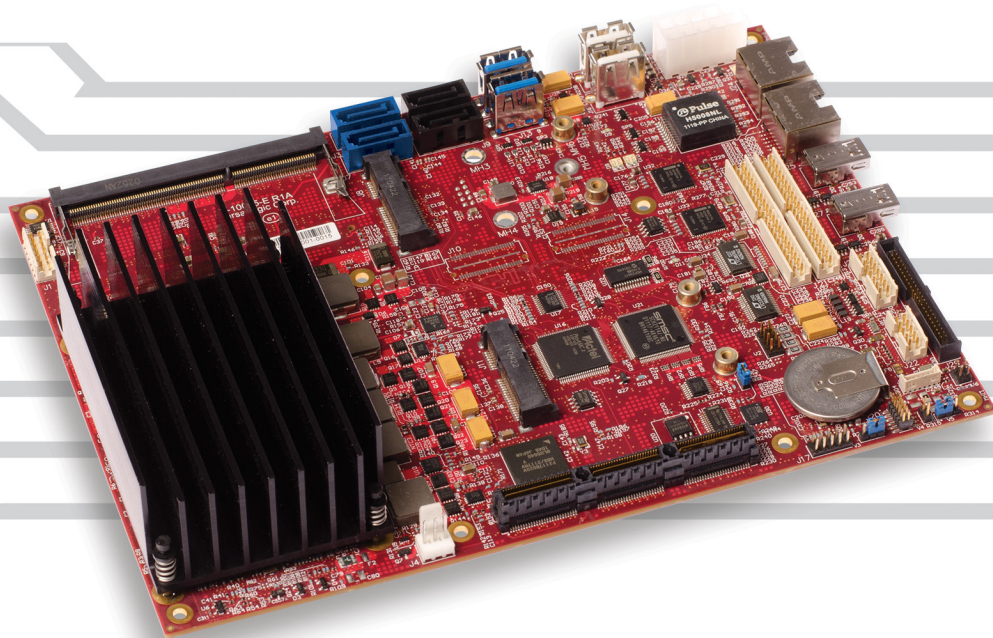

### Overview

The Copperhead is a high-performance embedded computer powered by the 3rd Generation Intel “Ivy Bridge” family of processors. Its performance level and extensive I/O allows for the integration of multiple high-bandwidth functions, such as digital signal processing and real-time video processing, onto a single board. This can drastically reduce system cost and size when used to replace multi-board chassis-based systems or custom hardware.

For systems that require video processing or intense computation, the Copperhead features a high-speed memory interface, up to 16 GB on-board RAM capacity, and up to three independent display outputs. The PCIe/104 expansion site with a PCIe x16 lane is ideal for add-on cards, such as frame grabbers.

Based on the industry-standard EBX format, the Copperhead provides a choice of Intel core i7, core i3, and Celeron processor options to meet a variety of price/performance application requirements. It features several heat management configurations and offers options for I/O interfaces and interface connectors. The Copperhead enables scalability, simplifies design, and lowers overall system cost.

### Highlights


- Industrial temp (-40° to +85°C) operating temperature versions
- Shock & vibration per MIL-STD-202G
- EBX™ form factor
- Very high performance!
- 3rd Generation Intel processor (“Ivy Bridge”)
  - Core i7-3615QE (quad core) or
  - Core i7-3517UE (dual core) or
  - Core i3-3217UE (dual core) or
  - Celeron 1047UE (dual core)
- Up to 16 GB SO-DIMM RAM system memory
- Wide input voltage (9V–15V)
- PCIe/104 or SUMIT expansion
- Gigabit Ethernet
- VGA, LVDS, and mini DisplayPort video
- Mini PCIe socket / with mSATA support
- USB 3.0 and USB 2.0 ports
- Serial I/O (4 RS-232/422)
- SATA (6 Gb/s and 3 Gb/s)
- Digital I/O (32 lines)
- Fanless versions
- Trusted Platform Module (TPM) security chip (optional)
- VersaAPI programming support
- Customization available in quantities as low as 100 pcs.

# Features

- 1 Intel® 3rd Generation Core™ Processor**  
Core i7, Core i3, and Celeron CPU options allow selecting best price/performance for the application. Copperhead provides high performance with advanced technology features: Intel Turbo Boost 2.0\*, Intel vPro®, Hyper-threading\* (two threads per core), and Advanced Vector Extensions\* (AVX).
- 2 Intel QM77 Platform Controller Hub**  
The PCH provides extensive I/O support to the CPU
- 3 High-performance Video**  
Integrated Intel HD graphics core with GPU Turbo Boost\*. DirectX 11, MPEG-2, H.264, OGL 3.1 compliant and MPEG-2 video encoding and decoding. Supports up to three independent displays. Standard video outputs include LVDS (**3a – on back side**) for flat panel displays, dual mini DisplayPort™ (**3b**), and an analog VGA output (**3c**). All outputs support multiple display modes including Extended Desktop and Clone.
- 4 Network Support**  
Dual Ethernet interfaces, autodetect 10BaseT / 100BaseTX / 1000BaseT with network boot capability.
- 5 RAM**  
Up to 16 GB DDR3L socket memory up to 1600 MT/s., two SO-DIMM sockets (one each on top and bottom.)
- 6 SATA**  
Two SATA 6 Gb/s (**6a**) and two SATA 3 Gb/s (**6b**) ports support high-capacity storage (rotating media or solid-state drives). Includes hardware RAID 0/1/5/10 support
- 7 Device I/O**  
Two USB 3.0 ports (**7a**), ten USB 2.0 ports (**7b**) support keyboard, mouse, and other devices. Four RS-232/422 serial ports, three 8254 timer/counters (**7c**), and Intel High Definition Audio (HDA) compatible.
- 8 Analog + Digital I/O**  
On-board data acquisition support. Sixteen analog inputs, eight analog outputs, and thirty-two digital I/O lines.
- 9 Mini PCIe Socket**  
Supports Wi-Fi modems, Ethernet, Analog I/O, Serial ports, GPS, MIL-STD-1553, Ethernet, solid-state storage, and other plug-in devices.
- 10 Flash Memory**  
Dedicated mSATA socket (**10a**) and eUSB interface (**10b – on back side**) provides additional solid-state drive (SSD) options.
- 11 Wide Input Voltage Range**  
Accepts 9 to 15 volts (12V nominal) simplifies system power supply requirements. Copperhead is fully compatible with 12V automotive applications.

- 12 Trusted Platform Module (optional)**  
On-board security option defends against attacks from unauthorized hardware and software for applications that require enhanced hardware-level security functions.
- 13 SPX Expansion**  
Add low cost analog, digital, and CANbus modules. SPX interface supports up to four external SPX devices.
- 14 EBX™ Format**  
Industry-standard format with SUMIT™ (**14a**) or PCIe/104 Type 1 (**14b**) expansion.

- Industrial Temperature Versions**  
-40° to +85°C operation for harsh environments.
- MIL-STD-202G**  
Qualified for high shock and vibration environments.
- Software Support**  
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, Linux, and VxWorks. Supports VersaAPI programming support for onboard I/O devices.

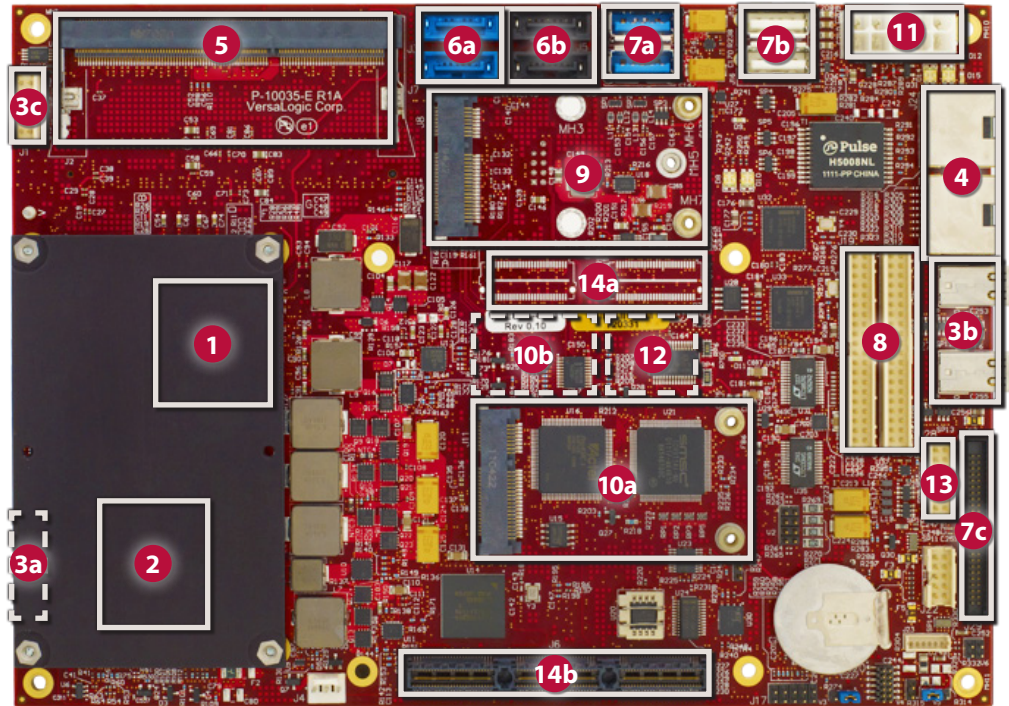

\* CPU model dependent, see specifications for more details.

## Tailor Copperhead to Your Exact Requirements

Customization options are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Labeling
- Custom Screening
- Custom Cabling
- BGA Underfill
- Application-Specific Testing
- Connector & I/O Changes
- BIOS Modifications
- Software and Drivers
- And more –
- Custom Testing
- Revision Locks

## Specifications

General				
<b>Board Size</b>	EBX standard: 5.75" x 8" (146 mm x 203 mm)			
<b>Processor</b>	Intel 3rd Generation 64-bit CPU platform.			
	<i>Processor</i>	<i>L3 Cache Size</i>	<i>AES New Instructions</i>	<i>Trusted Execution Technology</i>
	i7-3615QE	6 MB	Yes	Yes
	i7-3517UE	4 MB	Yes	Yes
	i3-3217UE	3 MB	No	No
	Celeron 1047UE	2 MB	No	No
<b>Controller Hub</b>	Embedded Intel QM77			
<b>Input Voltage</b>	12V (9V–15V)			
<b>Power Requirements (@ +12V) §</b>	<i>Model</i>	<i>Idle</i>	<i>Typical</i>	<i>Max.</i>
	VL-EBXe-41SJF	16.2W	37.2W	58.1W
	VL-EBXe-41EJP	16.2W	37.2W	58.1W
	VL-EBXs-41SAK	7.6W	20.7W	33.7W
	VL-EBXs-41EAF	7.6W	20.7W	33.7W
	VL-EBXe-41EHF	7.6W	20.7W	33.7W
	VL-EBXe-41ELF	8.8W	14.4W	20.0W
	VL-EBXe-41SLK	8.8W	14.4W	20.0W
	VL-EBXe-41SMK	9.8W	13.3W	16.9W
	VL-EBXe-41EMF	9.8W	13.3W	16.9W
<b>System Reset &amp; Hardware Monitors</b>	All voltage rails monitored. Two watchdog timers with programmable timeout. CPU temperature and fan speed monitoring. Push-button sleep, reset, and power.			
<b>Stackable Bus</b>	SUMIT or PCIe/104 Type 1 expansion site			
<b>Manufacturing Standards</b>	Standard	IPC-A-610 Class 2 modified		
	Special Order	IPC-A-610 Class 3 modified		
<b>RoHS</b>	Compliant			

Environmental			
<b>Operating Temperature</b> ◊	0° to +60°C and -40° to +85°C <i>See Ordering Information for Specific Models</i>		
<b>Storage Temperature</b>	-40° to +85°C		
<b>Altitude</b>	Operating *	To 4,570m (15,000 ft.)	
	Storage	To 12,000m (40,000 ft.)	
<b>Airflow Requirements</b>	<i>Thermal Solution</i>	<i>Temp. Range</i>	<i>Airflow</i>
	Heat plate (Heat plate must be kept below 90°C)	0° to +60°C	Zero airflow
		-40° to +85°C	100 Linear Feet per Minute (0.5 Linear Meters per Second)
	Heat sink (fanless)	0° to +60°C	100 Linear Feet per Minute (0.5 Linear Meters per Second)
	Fan + Heat sink	-40° to +85°C	100 Linear Feet per Minute (0.5 Linear Meters per Second)
<b>Thermal Shock</b>	5°C/min. over operating temperature		
<b>Humidity</b>	Less than 95%, noncondensing		
<b>Vibration, Sinusoidal Sweep</b> ¥	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis		
<b>Vibration, Random</b> ¥	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis		
<b>Mechanical Shock</b> ¥	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis		

§ Represents operation at +25°C and +12V running Windows 7 with 4 GB RAM, LVDS display, SATA, GbE, COM, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization.

‡ TVS protected port (enhanced ESD protection)

# Power pins are overload protected

† IEEE 1588 Precision Time Protocol (PTP) compatible

◊ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

\* For extended altitude information contact VersaLogic Sales Dept.

¥ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact a VersaLogic Sales Engineer for further information.

Specifications are subject to change without notification. Intel and Core are trademarks of Intel Corp. EBX and PCIe/104 are trademarks of the PC/104 Consortium. SUMIT is a trademark of the SFF-SIG. PCI Express is a registered trademark of the PCI-SIG. DisplayPort is a trademark of VESA. All other trademarks are the property of their respective owners.

Security	
<b>TPM (optional)</b>	Support for Intel Trusted Platform Module 1.2 devices

Memory				
<b>System RAM</b>	Two SO-DIMM sockets. Up to 16 GB DDR3L SDRAM total. Supports 1066, 1333, and 1600 MT/s. 1.35V.			

Video				
<b>General</b>	Integrated high-performance video.			
	<i>Processor</i>	<i>Graphics Core</i>	<i>Simultaneous Independent Displays</i>	<i>Graphics Hardware Accel.</i>
	i7-3615QE	Intel HD Graphics 4000	3	Yes
	i7-3517UE	Intel HD Graphics 4000	3	Yes
	i3-3217UE	Intel HD Graphics 4000	3	Yes
	Celeron 1047UE	Intel HD Graphics	2	No
<b>VRAM</b>	Up to 512 MB shared DRAM			
<b>Desktop Display Interface</b> ‡	Standard analog output (VGA). Up to 2048 x 1536 (75 Hz). 32-bit.			
<b>OEM Flat Panel Interface</b> #	LVDS interface. 18/24-bit. Up to 1280 x 800 (60 Hz). 8 bpp. CMOS-selectable TFT panel types. Support for LVDS Backlight Control and FPD power control.			
<b>DisplayPort</b>	Two mini DisplayPort outputs. Up to 2560 x 1600 (60 Hz). 10 bpp.			

Mass Storage	
<b>Rotating Drives / Flash / Solid-State Drives</b>	- Two SATA 6 Gb/s ports (latching connectors) - Two SATA 3 Gb/s ports (latching connectors) Supports RAID 0, 1, 5, and 10. mSATA socket (SATA signaling, bootable) eUSB site (USB signaling, bootable)

Network Interface		
<b>Ethernet</b> ‡ †	Two autotetect 10BaseT/100BaseTX/1000BaseT ports	
	Standard	RJ45 connectors
	Special Order	Ruggedized connectors
<b>Network Boot Option</b>	Via BIOS extension built into Ethernet controller flash	

Device I/O	
<b>USB</b> # ‡	Ten USB 2.0 host ports. Two USB 3.0 host ports.
<b>COM 1 / 2 / 3 / 4</b> ‡	RS-232/422 selectable. 16C550 compatible.
<b>Analog Input</b>	Sixteen channels. 12-bit single-ended. 100 Ksps. 16-bit by special order.
<b>Analog Output</b>	Eight channels. 12-bit single-ended. 100 Ksps.
<b>Digital I/O</b>	Thirty-two TTL I/O lines (3.3V). Independently configurable.
<b>Audio</b>	Intel High-Definition Audio (HDA)
<b>Counter/Timers</b>	Three general-purpose 16-bit timers

Other I/O	
<b>Mini PCIe / Socket</b>	Full-size Mini PCIe socket. Supports Wi-Fi modems, GPS receivers, non-volatile flash data storage with auto-detect mSATA support, and other plug-in modules.
<b>VersaLogic SPX Interface</b>	Supports low cost analog, digital, and CANbus SPX modules

Software	
<b>BIOS</b>	American Megatrends (AMI) Aptio UEFI BIOS with OEM enhancements. Field reprogrammable. Support for USB keyboard/mouse and USB boot. User-configurable CMOS defaults.
<b>VersaAPI</b>	VersaLogic Application Programming Interface to support on-board I/O devices.
<b>Sleep Mode</b>	ACPI 4.0a. Support for S3 and S4 suspend states
<b>Operating Systems</b>	Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, and VxWorks

## Ordering Information

Other configurations are possible. Please contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

Model	Processor	Cores	Nominal Speed	Max Turbo Speed	Hyper-Threading	vPro Technology	AVX Instructions	Expansion	Operating Temp.	Cooling
VL-EBXe-41SJF	i7-3615QE	Quad	2.3 GHz	3.3 GHz	Yes	Yes	Yes	PCIe/104	0° to +60°C	Fan + heat sink
VL-EBXe-41EJP	i7-3615QE	Quad	2.3 GHz	3.3 GHz	Yes	Yes	Yes	PCIe/104	-40° to +85°C	Heat plate (fanless)
VL-EBXs-41SAK*	i7-3517UE	Dual	1.7 GHz	2.8 GHz	Yes	Yes	Yes	SUMIT	0° to +60°C	Heat sink (fanless)
VL-EBXs-41EAF*	i7-3517UE	Dual	1.7 GHz	2.8 GHz	Yes	Yes	Yes	SUMIT	-40° to +85°C	Fan + heat sink
VL-EBXe-41EHF*	i7-3517UE	Dual	1.7 GHz	2.8 GHz	Yes	Yes	Yes	PCIe/104	-40° to +85°C	Fan + heat sink
VL-EBXe-41ELF	i3-3217UE	Dual	1.6 GHz	N/A	Yes	No	Yes	PCIe/104	-40° to +85°C	Fan + heat sink
VL-EBXe-41SLK*	i3-3217UE	Dual	1.6 GHz	N/A	Yes	No	Yes	PCIe/104	0° to +60°C	Heat sink (fanless)
VL-EBXe-41SMK	Celeron 1047UE	Dual	1.4 GHz	N/A	No	No	No	PCIe/104	0° to +60°C	Heat sink (fanless)
VL-EBXe-41EMF*	Celeron 1047UE	Dual	1.4 GHz	N/A	No	No	No	PCIe/104	-40° to +85°C	Fan + heat sink


\* Special Order Product – Contact VersaLogic Sales for minimum order quantities and lead time.

## Accessories

Part Number	Description
<b>Cable Kit</b>	
VL-CKR-COPPR	Copperhead cable kit. Includes VL-CBR-0702, 0808, 1201, 4004, 5013, and VL-HDW-105 (x2).
VL-CBR-5013	Primary breakout cable (4 USB, 4 RS-232/422, programmable LED, speaker, audio, reset push button, power push button)
VL-CBR-1201	12-pin 2 mm (latching) / 15-pin VGA adapter
VL-CBR-0702	20" SATA cable. Latching.
VL-CBR-0808	12" power adapter cable. ATX12 to Copperhead.
VL-CBR-4004	Cable & paddleboard for the A/D, D/A, DIO, CTC
VL-HDW-105 (x2)	15.24 mm standoffs, metric thread (four per kit)
<b>Cables</b>	
VL-CBR-0401	6.25" ATX to SATA power cable
VL-CBR-1401	6" 14-pin cable assembly for (2) SPX modules
VL-CBR-1402	12" 14-pin cable assembly for (4) SPX modules
VL-CBR-2010	20" 18-bit LVDS flat panel cable (Hirose)
VL-CBR-2011	20" 18-bit LVDS flat panel cable (JAE)
VL-CBR-2012	20" 24-bit LVDS flat panel cable (Hirose)
VL-CBR-2031	36" miniDisplayPort to MiniDisplayPort
<b>Memory</b>	
VL-MM9-xxxx	DDR3 PC3-12800 SO-DIMM memory module (1.35v)
<b>Drives</b>	
VL-HDS35-xxx	3.5" hard drive (SATA)
VL-F15-xxxx	eUSB flash module
<b>Hardware</b>	
VL-PS-ATX12-300A	ATX12 development power supply
VL-HDW-106	0.6" standoffs, English thread (four per kit)
VL-HDW-108	Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm
VL-HDW-109	eUSB hardware kit
<b>Miscellaneous</b>	
VL-HDW-111	Half to Full Size MiniPCIe Adapter kit. Metal adapter and screws (2).
VL-HDW-203	PC/104 extractor tool (metal)
VL-HDW-401	Thermal compound paste (1.75g)
VL-EPH-V6	Display Port to Dual Channel LVDS converter

## Expansion Modules

Part Number	Description	Form Factor
<b>Network</b>		
VL-MPEe-W2E	Wi-Fi 802.11 a/b/g/n	Mini PCIe
VL-SPX-3	CANbus Module single-channel V2.0B	SPX
VL-MPEe-E3E	Gigabit Ethernet adapter	Mini PCIe
<b>Serial I/O</b>		
VL-MPEe-U2E	Quad serial plus twelve GPIOs	Mini PCIe
<b>Analog &amp; Digital I/O</b>		
VL-MPEe-A1E	Analog input (12-bit resolution)	Mini PCIe
VL-MPEe-A2E	Analog input (16-bit resolution)	Mini PCIe
VL-SPX-1	Analog Input Module 8-Channels	SPX
VL-SPX-2	Digital I/O Module 16-lines	SPX
VL-SPX-4	Analog Output Module 4-channels 12-bit	SPX
VL-SPX-5	Solid State Switch Module 8-channel	SPX
<b>GPS</b>		
VL-MPEu-G2E	GPS receiver	Mini PCIe
<b>Solid-State Storage (flash memory)</b>		
VL-MPEs-F1Exx	mSATA module (4/16/32 GB) (SATA)	Mini PCIe
<b>Adapters</b>		
VL-MPEs-S3E	SATA adapter	Mini PCIe

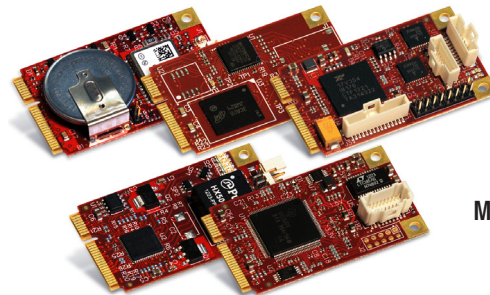

Mini PCIe Modules