



## Aluminum Frame Mount

Twist-on wire mounting and routing

**MADE FOR REAL** 

# Bundling and Securing

## Cable Tie Mounts


### Aluminum Frame Mounts

#### AFLM series


Aluminum Frame Mounts can be used with 40 mm (1.5") square frames from the major aluminum frame manufacturers. As there is no need to screw them in place, these mounts offer maximum ease of use and fast installation.

#### Features and Benefits

- Easy to install, remove and reposition with just a quarter-turn – no tools necessary.
- Multi-directional cable tie slot allows for routing a bundle parallel to or perpendicular to the frame.
- Low profile design is ideal for applications where there are space constraints.
- Designed to fit an 80/20 profile with a T-slot of 8 mm (0.32") and external dimensions of 40 mm (1.5").

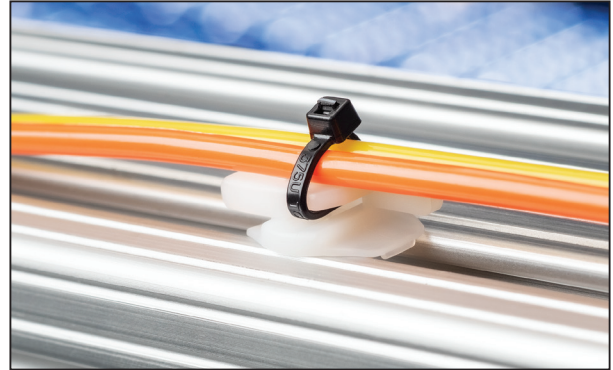

<b>MATERIAL</b>	Polyamide 6.6 (PA66)
<b>Operating Temperature</b>	-40°F to +185°F (-40°C to +85°C)
<b>Flammability</b>	UL 94 V2

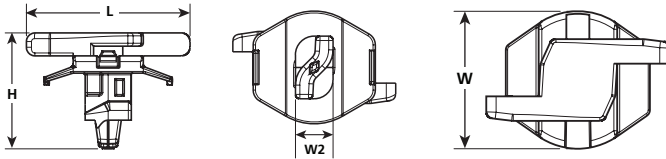

PART NO.	TYPE	Length (L) in. (mm)	Width (W) in. (mm)	Height (H) in. (mm)	Panel Thickness in. (mm)	T-Slot Width (W2) in. (mm)	Color	Pkg. Qty.	
151-01611	AFLM30-1	1.02 (26.0)	0.71 (18)	0.68 (17.2)	0.10 - 0.12 (2.5 - 3.0)	0.24 (6.0)	Natural	100	
151-01612	AFLM40-1	1.10 (28.0)	0.83 (21)	0.80 (20.2)	0.16 - 0.19 (4.0 - 4.8)	0.31 (7.9)	Natural	100	

*Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.*

### Installation Instructions



1. Place mount into T-slot.



2. Rotate mount a quarter turn.



3. Insert cable tie to secure wire or cable run.

### Aluminum Frame Mounts

#### MCAFLM series


Aluminum Frame Mounts can be used with 40 mm (1.5") square frames from the major aluminum frame manufacturers. As there is no need to screw them in place, these mounts offer maximum ease of use and fast installation. The mounts contain metal particles for detection in processing plants where the potential for contamination is undesirable.

#### Features and Benefits

- Easy to install, remove and reposition with just a quarter-turn – no tools necessary.
- Multi-directional cable tie slot allows for routing a bundle parallel to or perpendicular to the frame.
- Low profile design is ideal for applications where there are space constraints.
- Designed to fit an 80/20 profile with a T-slot of 8 mm (0.32") and external dimensions of 40 mm (1.5").



<b>MATERIAL</b>	Polyamide 6.6, with metal particles (PA66MP+)
<b>Operating Temperature</b>	-40°F to +185°F (-40°C to +85°C)
<b>Flammability</b>	UL 94 HB

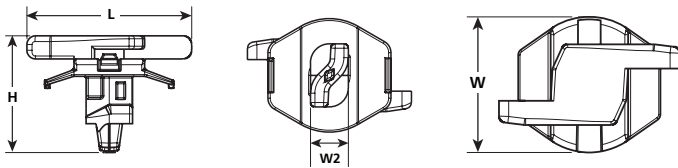

PART NO.	TYPE	Length (L) in. (mm)	Width (W) in. (mm)	Height (H) in. (mm)	Panel Thickness in. (mm)	T-Slot Width (W2) in. (mm)	Color	Pkg. Qty.	
151-02567	MCAFLM30-1	1.02 (26.0)	0.71 (18)	0.68 (17.2)	0.10 - 0.12 (2.5 - 3.0)	0.24 (6.0)	Blue	100	
151-02949	MCAFLM40-1	1.10 (28.0)	0.83 (21)	0.80 (20.2)	0.16 - 0.19 (4.0 - 4.8)	0.31 (7.9)	Blue	100	

*Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.*

## **HellermannTyton North American Corporate Headquarters**

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224-9517  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
email: corp@htamericas.com  
www.hellermann.tyton.com

***IATF 16949, AS9100, ISO 9001 and ISO14001 certified***

## **HellermannTyton Canada**

Unit #4, 205 Industrial Parkway North  
Aurora, Ontario L4G 4C4 Canada  
Phone: (800) 661-2461  
Fax: (800) 390-3904  
email: sales@hellermanntyton.ca

## **HellermannTyton Mexico**

Anillo Periferico Sur 7980 Edificio 6A  
Parque Industrial Tecnologico II  
Santa Maria Tequepexpan  
Tlaquepaque, Jalisco, Mexico 45601  
Phone: 011-52-33-3-133-9880  
Fax: 011-52-33-3-133-9861  
email: info@htamericas.com.mx

***ISO 9001 certified***

**Warranty Policy** – HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses.