



PART NUMBER
SEE TABLE

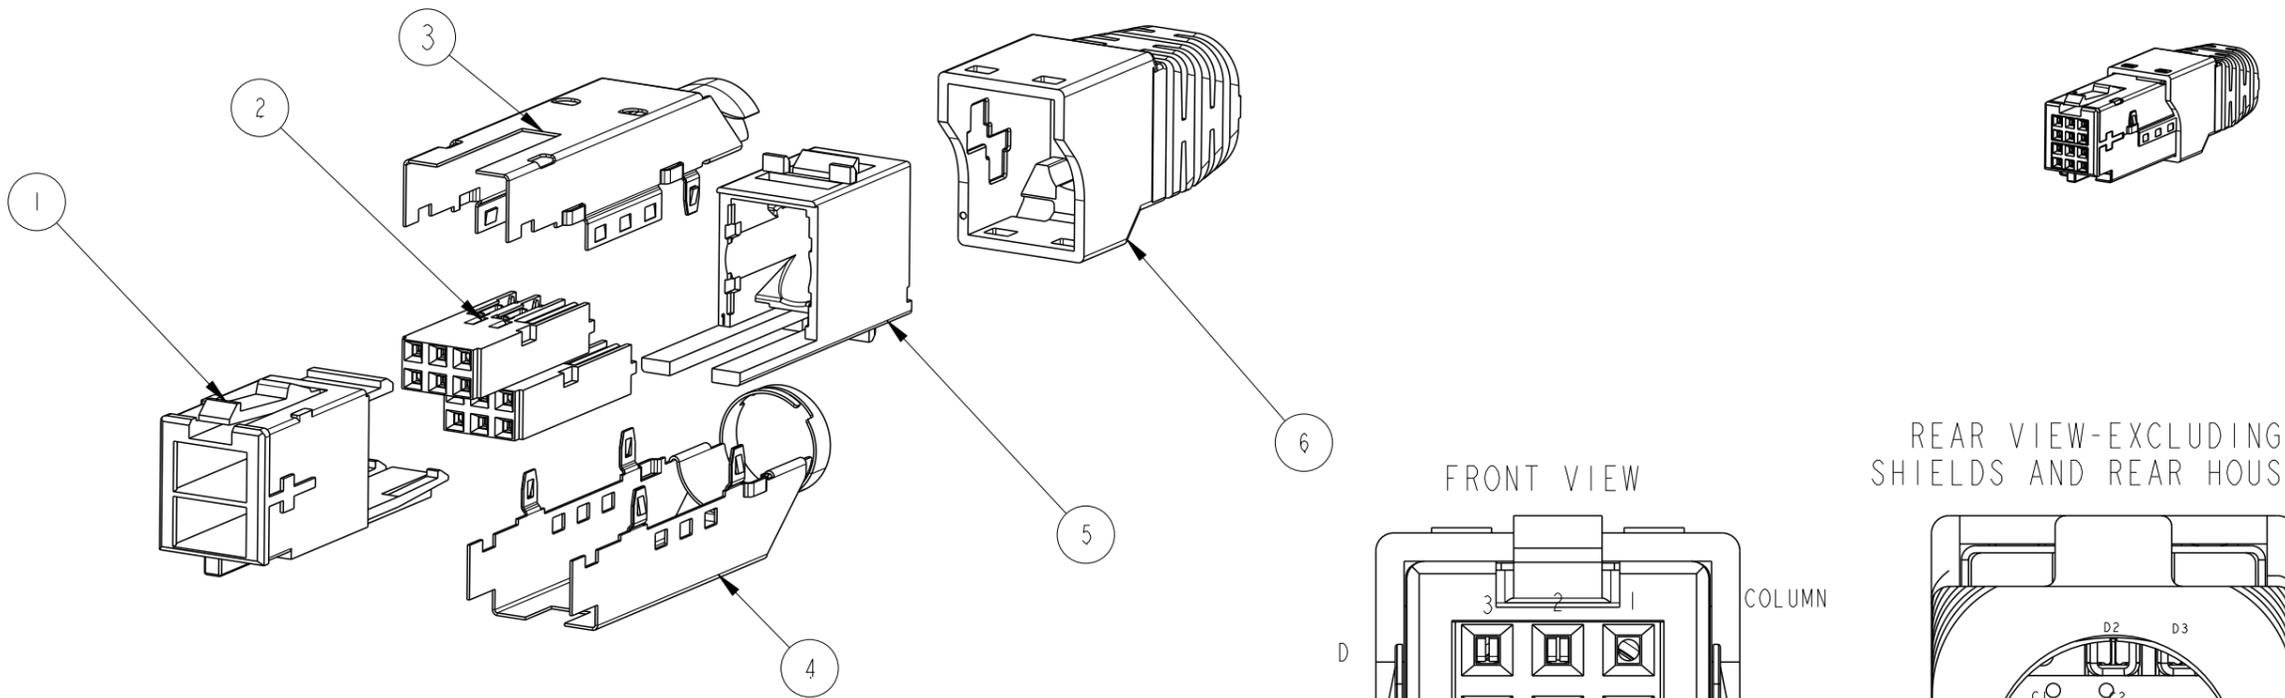

INDEX NO:	DESCRIPTION	MATERIAL	QTY
1	CABLE CONNECTOR HOUSING - FRONT	PBT, COLOUR BLACK	1
2	TERMINAL BLOCK ASSEMBLY	COPPER ALLOY+LCP	2
3	TOP SHIELD	COPPER ALLOY	1
4	BOTTOM SHIELD	COPPER ALLOY	1
5	CABLE CONNECTOR HOUSING - REAR	TRANSPARENT PC	1
6	GROMMET	SILICON	1

SL.NO	AFCI P/N	DESCRIPTION	ROW	COLUMN 3	COLUMN 2	COLUMN 1
1	10138200-101LF	SHIELDED CABLE CONNECTOR-BOLTRACK WITH 8 SIGNAL CONTACTS	D	X	X	-
			C	-	X	X
			B	X	X	-
			A	-	X	X

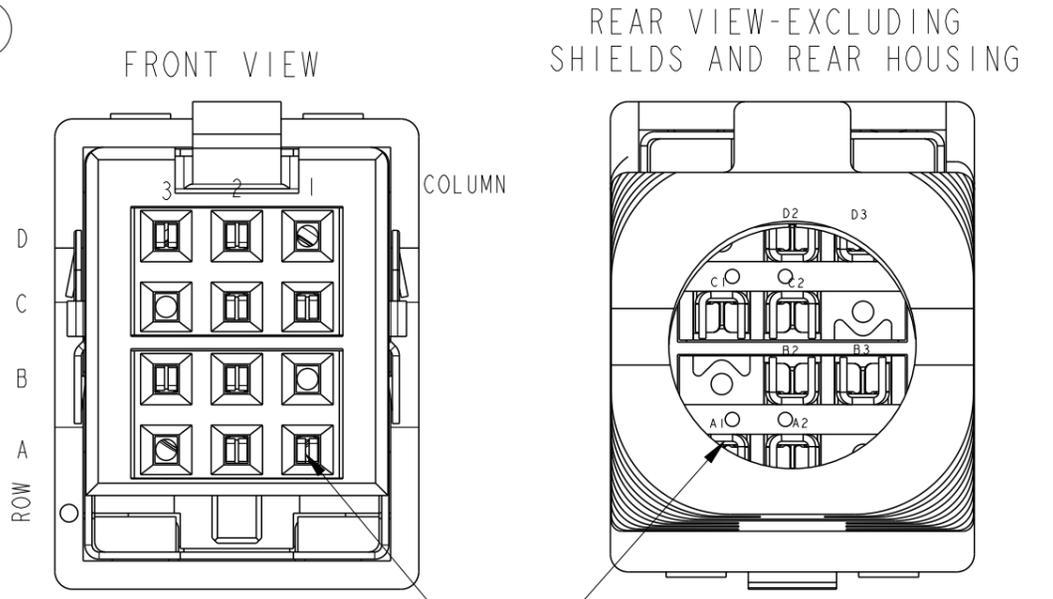

- NOTE:
1. PRODUCT SPECIFICATION: GS-XX-XXXX
 2. APPLICATION SPECIFICATION: GS-XX-XXXX
 3. PACKAGING SPECIFICATION: GS-XX-XXXX
 4. PERFORMANCE LEVEL: TELECORDIA CO
 5. FLAMMABILITY CLASSIFICATION: UL94 V-0
 6. RoHS COMPLIANT
 7. WIRE SIZE:
SIGNAL: AWG24/AWG26
 8. WIRE INSULATION DIAMETER: MAX 1 MM

spec ref	-	dr	Jibin John	2016/10/28	projection	MM	size	A3	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Jibin John	2016/10/31			ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	product family						
surface	linear	0.X	±0.3	Amphenol FCI	SHIELDED CABLE CONNECTOR KIT	dwg no	10138200	rev	A	
		0.XX	±0.13							
0.XXX	±0.05									
ISO 1302	angular	0°	±2°	cat. no.	-	Product - Customer Drw	sheet 1 of 1			

Amphenol FCI
© 2016 AFCI