
CHARACTERISTICS Connector dimension -Standard : Based on MIL-DTL-38999 Series III Dim Nominal -Shell Material : Aluminium Z 31 Max -Shell Plating : Nickel VV THREAD VV THREAD M25x1-6g -Insulator : Thermoplastic	۳ Ω <u></u>	m		O		
	4					4
ACTENTICE Budgeting in strengte Stell Plating in strengte Stell Plating in strengte Generation Rationale Stell Plating in strengte Generation Rationale Stell Plating in strengte Generation Rationale Generationale Generationale Generationale				LAYOUT SHOWN AS EXAMPLE		3
CHARACTERISTICS -Shell Material :: Assed on MUL-DTL-38999 Series III -Shell Material :: Alwrinium -Shell Material :: Shell Material :: Alwrinium -Shell Material :: Shell Plottog :: Shell Thermoplastic -Contacts :: Cooper Alloy -Shell And train :: Soliton Elastomer -Contact Plottog :: Solidove coper Alloy 0.5µm minimum -Dorability :: Standard comper alloy 0.5µm minimum -Dorability :: Standard Comp Contact :: Soliton Elastomer -Contact Plottog :: Soliton Elastomer -Shell Wered with Souriau contacts and Accessories -Temperature Range :: 63°C to 2200°C -Sats Sprary :: 23.9 g ± 10% Basic Series: 80 _ 5 _ 17 _ f _ 06 _ P _ A	Kovie					
Standard : Based on MIL-DTL-38999 Series III Shell Material :: Aluminium Shell Material :: Aluminium Shell Material :: Shell :: She						
Shell Material A luminium Shell Material A luminium Shell Material A luminium Shell Material Contacts Shell Material Contacts Shell Material Shell Material Sourcat Plaining Shell Material Sourcat Plaining Sourcat Plaining Source Material Source Plaining </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Shell Plating : Nickel		ØS 35.7 Max	COLIDI	All shall not be liable for any non-conform	situ or damaga	
-Insulator :: Thermoplastic -Contacts :: Copper Alloy -Seals & Grommet :: Soliton Elastomer -Durability :: Solid over copper Alloy 0.8µm minimum -Neass :: Solid over copper Alloy 0.8µm minimum -Mass :: Solid Spray SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Salad Spring Contact Shiels IZPE : Solid Crimp Contact Shiels IZP : F : Solid Crimp Contact PLATING :: F : Nickel Contact I Layout : Solid Alloy PLATING :: F : Nickel Contact Layout <						
Ordacts :: Copper Alloy -Seals & Grommet :: Silicon Elastomer Ourdatity :: Countact Plaing Delivered with Souriau contacts and Accessories	-Insulator : Thermoplastic					
 Contact Plating :: 6 old over copper Alloy 0.8µm minimum - Contact Plating :: 6 old over copper Alloy 0.8µm minimum - Durability :: 500 Mating cycles - Delivered with Souriau contacts and Accessories - Temperature Range :: -65°C to + 200°C - Salt Spray :: 48 hours - Mass :: 29.9 g ± 10% BASIC SERIES: 8D 5 · 17 F 06 P A BASIC SERIES: 8D 5 · 17 F 06 P A - SHELL TYPE :: Plug with RFI Shielding - CONTACT TYPE :: Standard Crimp Contact BHELL SIZE : 17 PLATING :: F = Nickel CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Nickel CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact BHELL SIZE : 17 PLATING :: F = Nickel 	-Contacts : Copper Alloy			(professional recommendation, technical)	notice.)	
P -Contact Plating :: Gold over copper Alloy 0.8µm minimum	-Seals & Grommet : Silicon Elastomer			Country Juris	sdiction & Control List	
- Delivered with Souriau contacts and Accessories - Temperature Range :: -65°C to +200°C - Salt Spray :: 29.9 g ± 10% - Mass :: 29.9 g ± 10% BASIC SERIES: 8D 5 - 17 F SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL SIZE : 17 PLATING :: F = Nickel CONTACT LAYOUT : 17-06	► -Contact Plating : Gold over copper Alloy 0.8µm minimum					
-Temperature Range :: -65°C to + 200°CSalt Spray :: 29.9 g ± 10% A 14-10-2016 First ReleaseSalt Spray :: 29.9 g ± 10% A 14-10-2016 First Release	-Durability : 500 Mating cycles					
-Salt Spray : 48 hours -Mass : 29.9 g ± 10%	-Delivered with Souriau contacts and Accessories		PN: 8D517F06PA			
-Salt Spray : 48 hours -Mass : 29.9 g ± 10% -Mass : 29.9 g ± 10%	-Temperature Range - 65°C to +200°C		Δ 14-10-2016 First Releas			
BASIC SERIES: 8D 5 - 17 F 06 P A BASIC SERIES: 8D 5 - 17 F 06 P A CONTACT TYPE : Plug with RFI Shielding						
BASIC SERIES: 8D 5 - 17 F 06 P A SHELL TYPE : Plug with RFI Shielding - 17 F 06 P A SCALE Contact Type Scale 859 CONTACT TYPE : Standard Crimp Contact CONTACT TYPE : PIN(500 Matings) CONTACT TYPE : PIN(500 Matings) This document is the property of SOURIAU.COM SOURIAU PLATING : F = Nickel CONTACT LAYOUT : 17-06 FORMAT SOURIAU DRG N° SHEET						<u>) N° </u>
BASIC SERIES: 8D 5 - 17 F 06 P A SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact 0RIENTATION : A SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) PLATING :: F = Nickel CONTACT LAYOUT : 17-06 Format SOURIAU SOURIAU DRG N°			TITLE Aluminium Plug 8D series			
BASIC SERIES: BD SHELL TYPE : Plug with RFI Shielding I// F 00 F A I// F NA Tolerances: B59 CONTACT TYPE : Standard Crimp Contact ORIENTATION : A NA SOURIAU SOURIAU.COM SOURIAU SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 17-06 CONTACT LAYOUT : 17-06 Format SOURIAU DRG N° SHEET						
CONTACT TYPE : Standard Crimp Contact ORIENTATION : A SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) PLATING : F = Nickel CONTACT LAYOUT : 17-06		A	+ (€) Tolerances:		1
SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) SOURIAU it must not be reproduced or communicated without permission PLATING : F = Nickel CONTACT LAYOUT : 17-06 FORMAT SOURIAU DRG N° SHEET						'
PLATING : F = Nickel FORMAT SOURIAU DRG N° SHEET			SOURIAU V	SOURIAU VV VV.SOURIAU.COIVI it must not be reproduced		
			FORMAT			
		CONTACT LAYOUT : 17-06				
H G F E D C B A						<u></u>

-	Ŧ	G	г –	m	Ū	0	
		Contact Layout					
4	/						
	-x -	$ \stackrel{D_{\bigoplus}}{\longrightarrow} \stackrel{F_{\bigoplus}}{\bigoplus} \stackrel{B_{\oplus}}{\longrightarrow} \stackrel{+_{X}}{\longrightarrow} $					
	Control	Contacts (Insert arrangement 17-6) act Location					
	Conta position A B C C D E	(mm) (mm) +.121 (3.07) +.209 (5.31) +.241 (6.12) +.000 (0.00) +.000 (0.00) 241 (6.12) 241 (6.12) +.000 (0.00) 121 (3.07) +.209 (5.31)					
ω	size no. co	+.000 (0.00) +.000 (0.00) mber of ntacts Size Service Contact Supersedes 6 12 I All MS20053-6					
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommen	wl r o
22						PN: 8D51	R
					A 14-10-20	016 First Release	_
_					ISS DATE Designed By:		
					TITLE	Alum	ıir
_					SCALE NA	General linea Tolerances: ±	
					SOURIA	U WWW.SOURIAU	.0
					FORMAT A3	SOURIA 8D517	U
L	Н	G	F	E	D	C	

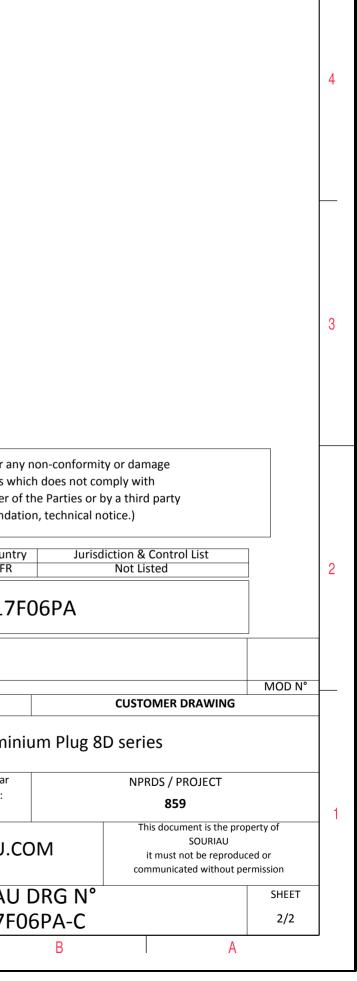

 \triangleright

σ