
	т (О Т	m		0		Þ]
C LUCUT DUC AS EXAMPL SUCURAL STAND LUCUT SUCURA STAND SUCURAL STAND<	4						4
CHARACTERISTICS Sinel Match? Based on ML-DTL-38999 Series II Shell Match? is ased on ML-DTL-38999 Series II Shell Match? Shell Match? <				LAYOUT SHOWN AS E	EXAMPLE		3
CHARACTERISTICS Shandard: Based on MIL-DTL-38090 Series III Shell Material: m: M: Shell Material: m: M:	Keving S	shown as example					
Sindard: Based on MIL-OTL-38999 Series III Shell Matchail :: Aumunitum Shell Matchail :: Contact - Contact :: Silicon Blastomer - Contact Plating :: Solid Contact - Ourability :: Solid Contact - Durability ::: Silicon Blastomer - Contact Plating <td:: contact<="" solid="" td=""> - Durability ::: Solid Contact - Durability ::: Solid Contact - Selecter ::: Solid Contact</td::>							
Shell Mathani i. Mulminum Shell Mathani i. Mulminum Shell Mathani i. Mulminum Shell Mathani i. Mickel Insulator i. Mickel - Shell Mathani i. Mickel - Shell Mathani i. Mickel - Shell Mathani i. Mickel - Ontacts i. Soloper Alloy - Shell Mathani i. Soloper Alloy - Mass : 26.68 g ± 10% - Shell Mathani i. Soloper Alloy - Mass : 26.68 g ± 10% - Shell Mathanianian Interview - Shell Mathanianian Interview - Shell Mathanianianianianianianianianianianianiania							
-Contact Plating : Gold over copper Alloy 0.8µm minimum FR Not Listed 2 -Durability :: 500 Mating cycles -Durability :: 500 Mating cycles PN: 8D515F35AA 2 -Delivered with Souriau contacts and Accessories	-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy	due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
-Salt Spray : 48 hours -Mass : 26.68 g ± 10% Mass : 26.68 g ± 10% Mass : 26.68 g ± 10% MoD N° BASIC SERIES: 8D SHELL TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact SHELL SIZE : S PLATING : F = Nickel	 Contact Plating : Gold over copper Alloy 0.8μm minimum Durability : 500 Mating cycles 						2
-Salt Spray : 48 hours -Mass : 26.68 g ± 10% -Mass : 26.68 g ± 10%	-Temperature Range : -65°C to +200°C		Δ 19-10-2016	First Release			_
BASIC SERIES: 8D 5 15 F 35 A A Intervention of the product of the	-Salt Spray : 48 hours						
BASIC SERIES: 8D 5 - 15 F 35 A A SHELL TYPE : Plug with RFI Shielding					CUSTOMER D		_
BASIC SERVES. ab 3 - 13 + A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A A			TITLE Aluminium Plug 8D series			_	
CONTACT TYPE : Standard Crimp Contact ORIENTATION : A SOURIAU SOURIAU.COM SOURIAU SOURIAU SOURIAU it must not be reproduced or communicated without permission SHELL SIZE : 15 PLATING : F = Nickel CONTACT TYPE : PIN(500 Matings) FORMAT SOURIAU		A		Tolerances:	859		-
PLATING : F = Nickel FORMAT SOURIAU DRG N° SHEET			SOURIAU	WWW.SOURIAU.C		SOURIAU ot be reproduced or	
			FORMAT				_
			A3			1/2	
A3 8D515F35AA-C 1/2 H G F E D C B A	Н С Е	F					

r	Ŧ	۵ ۵	г П	m		0
4	~	Contact Layout				
	Contact position ID Loca 1 +.045 (1.14) 2 +.123 (3.12) 3 +.211 (5.36) 4 +.254 (6.45) 5 200 (0.70) 6 +.247 (6.27) 7 +.200 (5.08) 8 +.130 (3.30) 9 +.045 (1.14) 10 045 (1.14) 11 130 (3.30)	Y-axis (mm) Contact position ID +262 (6.65) X-axis (mm) Y-axis (mm) +262 (6.65) 20 +123 (3.12) +.119 (3.02) +217 (5.51) 21 +.170 (4.32) +.040 (1.02) +160 (4.06) 22 +.170 (4.32) 050 (1.27) +080 (2.03) 23 +.123 (3.12) 127 (3.23) -010 (25) 24 045 (1.14) 172 (4.37) -175 (4.45) 26 123 (3.12) 127 (3.23) -232 (5.89) 27 170 (4.32) 060 (1.27) -266 (6.65) 28 170 (4.32) 060 (1.27) -262 (6.65) 29 123 (3.12) 127 (3.37) -232 (5.89) 30 045 (1.14) +.172 (4.37)				
ω	12 -200 (5.08) 13 -247 (6.27) 14 -256 (6.76) 15 -254 (6.45) 16 -211 (5.36) 17 -123 (3.12) 18 -045 (1.14) 19 +.045 (1.14)	175 (4.45) 31 +.045 (1.14) +.074 (1.88) 088 (2.49) 32 +.090 (2.29) 004 (0.10) 010 (25) 33 +.045 (1.14) 082 (2.08) +.080 (2.20) 3.34 045 (1.14) 082 (2.08) +.160 (4.06) 35 090 (2.29) 004 (0.10) +.217 (5.51) 36 045 (1.14) +.072 (1.88) +.262 (6.65) 37 +.000 (0.00) 004 (0.10)	2 2 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4			
	+					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment
N						PN: 8D51
					A 19-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
_					SCALE NA	Alum General lineal Tolerances: ±
					FORMAT A3	SOURIA
Ĺ	Н	G	F	E	D	8D515

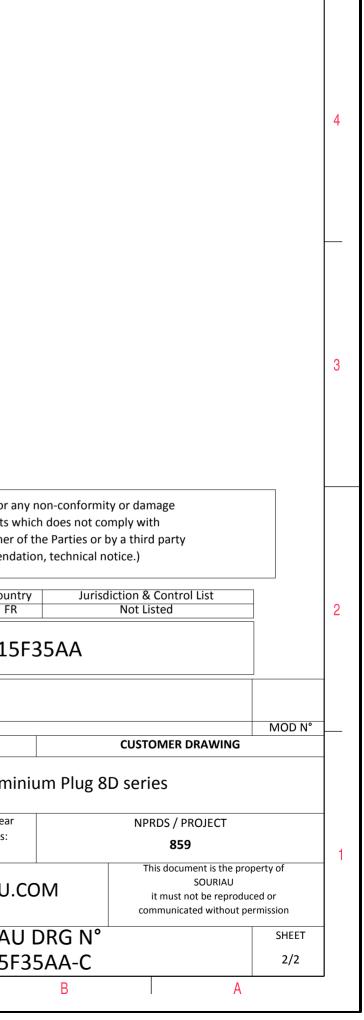

 \triangleright

σ