HDB 15 Male
Plastic: Blue

P1



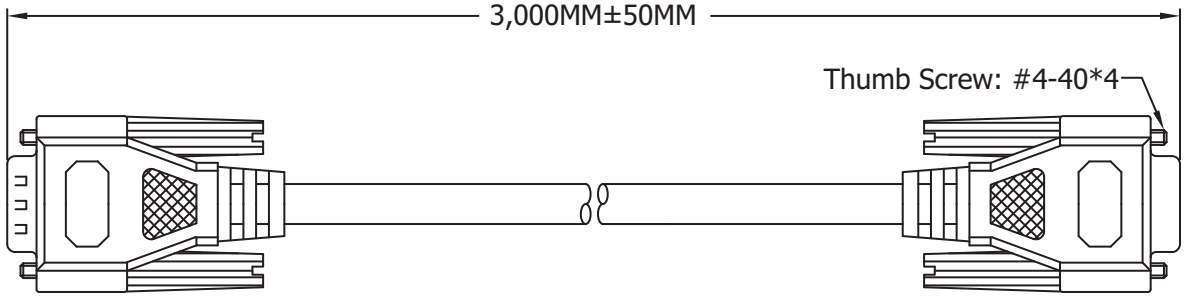

HDB 15 Female
Plastic: Blue



P2

PIN OUT

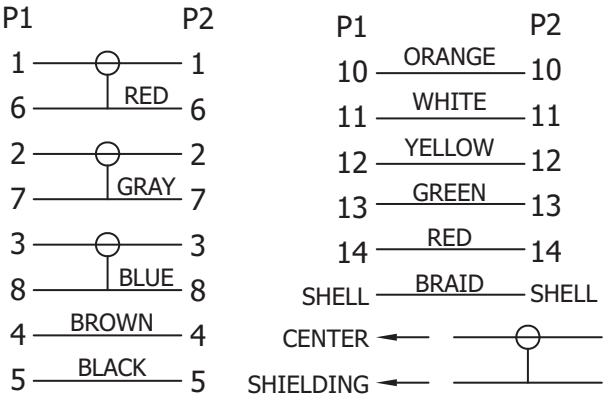

Material:

1. CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL
   INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)
   *7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN
   WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
   COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
2. CONNECTOR:
   P1:HDB 15P MALE,THE 9TH PIN IS EMPTY,GOLD FLASH CONTACT,
   NICKEL PLATED SHELL
   P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
4. SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
5. HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
6. ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MIS WIRE TEST
   <2>.CONTACT RESISTANCE 3 OHMS MAX
   <3>.INSULATION RESISTANCE 20M OHMS MIN
7. PACKING:SEE P-0039 REV.C PACKING DRAWING
   (HANKING SIZE MUST BE SMALLER THAN BLISTER)

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.16.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK3730X-R**

Title Premium XGA Monitor Extension Cable - HD D-Sub 15 pin Male <=> Female, 3 Meters

Drawing No. **rev00**

Replace | Sheet