

Han ES AV Pos. 6 Insert Term. Block left

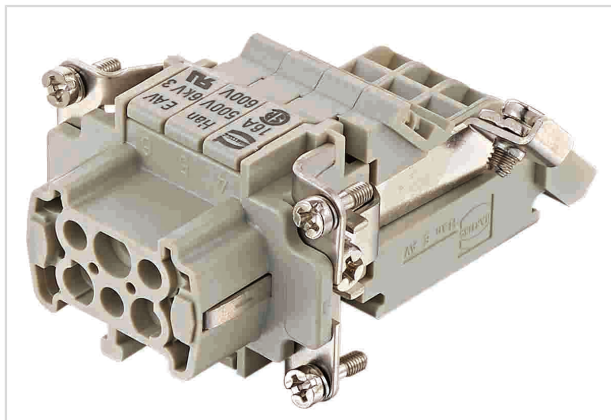


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---------------------------------------------------------------------------------------|
| Part number | 09 33 006 4729 |
| Specification | Han ES AV Pos. 6 Insert Term. Block left |
| HARTING eCatalogue | https://b2b.harting.com/09330064729 |

Identification

| | |
|---------------|------------------------------------------|
| Category | Inserts |
| Series | Han [®] ES AV |
| Element | Terminal block connector |
| Specification | Left hand version Single contour (SK) |

Version

| | |
|--------------------|------------------------|
| Termination method | Cage-clamp termination |
| Gender | Female |
| Size | 6 B |
| Number of contacts | 6 |
| PE contact | Yes |

Technical characteristics

| | |
|---------------------------|------------------------------|
| Conductor cross-section | 0.14 ... 2.5 mm ² |
| Rated current | 16 A |
| Rated voltage | 500 V |
| Rated impulse voltage | 6 kV |
| Pollution degree | 3 |
| Rated current acc. to UL | 12 A |
| Rated voltage acc. to UL | 600 V |
| Rated current acc. to CSA | 12 A |
| Insulation resistance | >10 ¹⁰ Ω |



Pushing Performance

Technical characteristics

| | |
|----------------------|-----------------|
| Contact resistance | ≤4 mΩ |
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥500 |

Material properties

| | |
|-------------------------------------------|--------------------------------------------------------|
| Material (insert) | Polycarbonate (PC) |
| Colour (insert) | RAL 7032 (pebble grey) |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Silver plated |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Nickel Lead |

Specifications and approvals

| | |
|----------------|-------------------------|
| Specifications | EN 60664-1 IEC 61984 |
| Approvals | DNV GL |
| UL / CSA | UL 1977 ECBT2.E235076 |

Commercial data

| | |
|--------------------------------|---------------------------------------------------|
| Packaging size | 1 |
| Net weight | 76.44 g |
| Country of origin | Germany |
| European customs tariff number | 85366990 |
| eCl@ss | 27440205 Contact insert for industrial connectors |